

Specifications

DESCRIPTION

- · Various finishess identified by suffix
- Nonmetallic spray face
- Nonmetallic shell

OPERATION

Single spray

FLOW

- Showerhead is limited to 2.5 gpm (9.5 L/min) max
- EP suffix models are limited to 1.75 gpm (6.6 L/min) max
- EP15 suffix models are limited to 1.5 gpm (5.7 L/min) max

STANDARDS

- Third party certified to meet ASME A112.18.1/CSA B125.1 and all applicable requirements referenced therein
- EP suffix models are third party certified to WaterSense®

WARRANTY

 Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser




EASY CLEAN® XL

Showerhead (only)

Models: 6300 Series

Showerhead, Arm & Flange

Model: 6304 Series

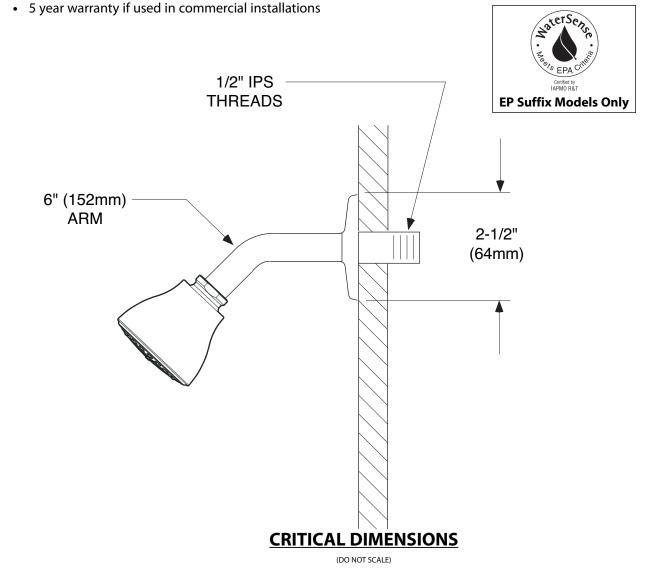

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN

www.moen.com