MOEN

FAUCET DESCRIPTION

- Reflex™ pulldown system offers smooth operation, easy movement and
- Metal construction with various finishes identified by suffix
- High arc spout provides the height and reach to fill or clean large pots while the pulldown feature provides the infinite maneuverability for cleaning or rinsing
- Duralock™ quick connect installation
- Pulldown spray with 68" braided hose
- High arc spout provides height and reach to fill or clean large pots while pullout wand provides the maneuverability for cleaning or rinsing
- 360° rotating spout
- Flexible supply lines with 3/8" compression fittings Power Boost™ Spray Technology

OPERATION

- Temperature controlled by 100° arc of handle travel When filling a vessel outside of the sink, the pause feature conveniently stops the flow of water as the wand passes over the countertop
- Convenient single-button actuation provides flexibility to switch from stream to spray mode **FLOW**

Flow is limited to 1.5 gpm (5.7 L/min) at 60 psi

CARTRIDGE


1255™ Duralast™ cartridge

STANDARDS


- Third party certified to IAPMO Green, ASME A112.18.1/CSA B125.1 and all applicable requirements therein including NSF 61/9 & 372
- Meets CalGreen and Georgia SB370 requirements
- Complies with California Proposition 65 and with the Federal Safe Drinking
- The backflow protection system in this device consists of two independently operating check valves, a primary and a secondary which prevent backflow
- for lever handle

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
- 10 year limited warranty when used in a multifamily installation 5 year limited warranty when used in a commercial installation Visit www.moen.com/support for complete details and limitations

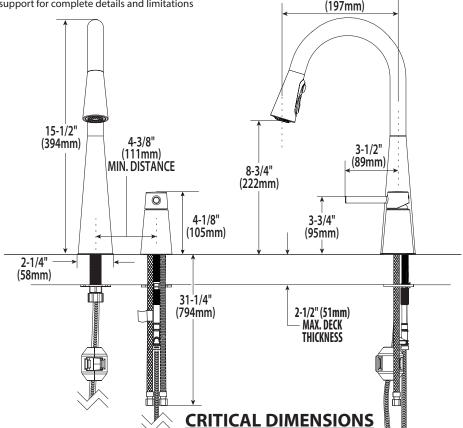

Specifications



SLEEK™ Single Handle High Arc Pulldown **Kitchen Faucet**

Model: 7871 series

NOTE: DESIGNED TO INSTALL THROUGH 2 HOLES 1-1/4" (32mm) MIN. DIA.



7-3/4"