

DESCRIPTION

- Various finishes identified by suffix
- Handshower
- 59" double interlock spiral hose (metal)
- Cradle for handshower

OPERATION

- Five function
- Cradle rotates to adjust angle of handshower

FLOW

- Designed to deliver 1.75 gpm (6.6 L/min) max at 80 psi


STANDARDS

- Designed and manufactured to comply with the applicable requirements of WaterSense®, ASME A112.18.1/CSA B-125.1, and all applicable specifications referenced therein
- Products marked with 1.75 gpm are compliant with California water efficiency regulations

WARRANTY


- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
- 10 year limited warranty when used in a multifamily installation
- 5 year limited warranty when used in a commercial installation

Visit www.moen.com/support for complete details and limitations

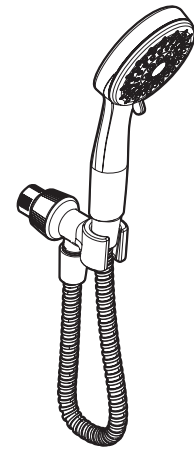

Ignite™
Five-Function Handshower
with Bracket & Hose

Models: 209H0 series

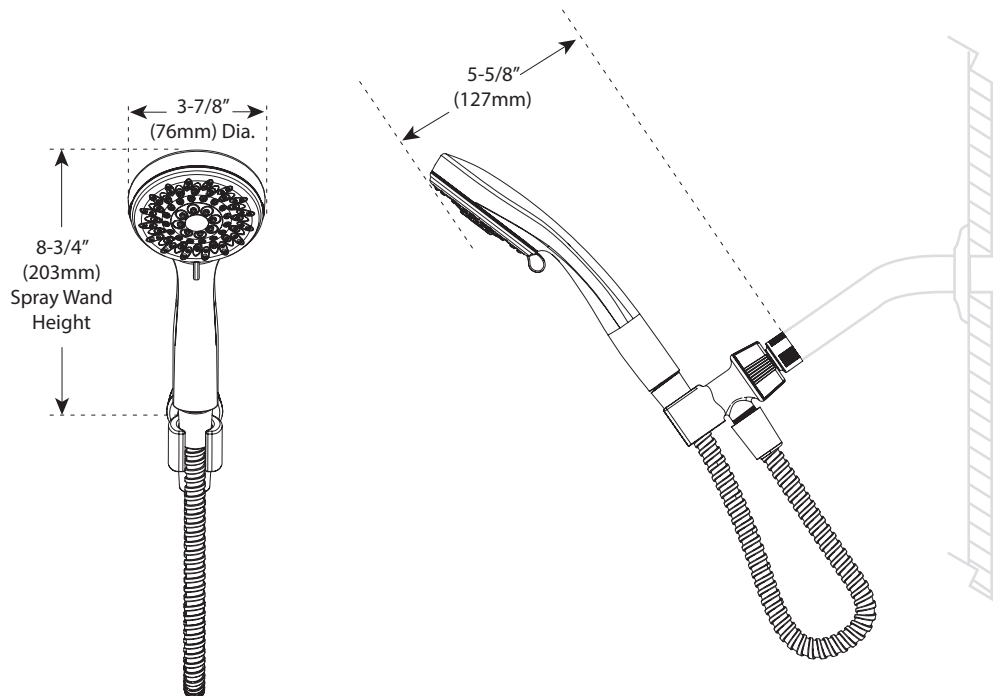

CRITICAL DIMENSIONS

(DO NOT SCALE)