MOEN®

DESCRIPTION

- Includes handshower, hose, showerhead and bracket
- Chrome finish
- 60" double interlock spiral hose (metal)
- 1/2" IPS connection

OPERATION

- Rainshower is single function, handshower is seven functions
- Rotate outer ring to select function
- 2-way diverter flows each showerhead separately

FLOW

- Designed to deliver 1.75 gpm (6.6 L/min) MAX at 80 psi (for models manufactured after 3/1/18)
- Designed to deliver 2.0 gpm (7.6 L/min) MAX at 80 psi (for models manufactured before 3/1/18)


STANDARDS

- Third party certified at WaterSense[®], ASME A112.18.1/CSA B-125.1, and all applicable specifications referenced therein
- Products marked with 1.75 gpm are compliant with California water efficiency regulations

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
- 10 year limited warranty when used in a multifamily installation
- 5 year limited warranty when used in a commercial installation


Visit www.moen.com/support for complete details and limitations



Specifications

Refresh[™] 7-Function Handshower/

Rainshower with 2-way Diverter Combo

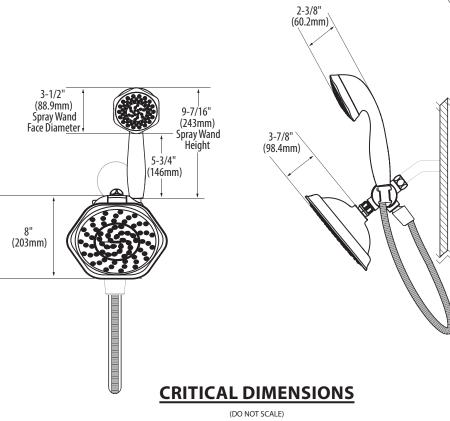

7/16/2018 SPC15574 5000(0355900 Jehased 00

Model: 21120 series

