

DESCRIPTION

- Fixed mount showerhead
- Spot Resist Brushed Nickel finish
- 1/2" IPS connection

OPERATION

- Four functions
- Rotate outer ring to select function

FLOW

- Designed to deliver 2.5 gpm (9.5 L/min) MAX at 80 psi
- EP suffix models designed to deliver 1.75 gpm (6.6 L/min) MAX at 80 psi

STANDARDS

- Third party certified to meet WaterSense®, ASME A112.18.1/ CSAB125.1 and all applicable requirements referenced therein
- Products marked with 1.75 gpm are compliant with California water efficiency regulations

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
 - 10 year limited warranty when used in a multifamily installation
 - 5 year limited warranty when used in a commercial installation
- Visit www.moen.com/support for complete details and limitations




Adler™
4-Function Showerhead

Model: 23027SRN



EP Suffix models only

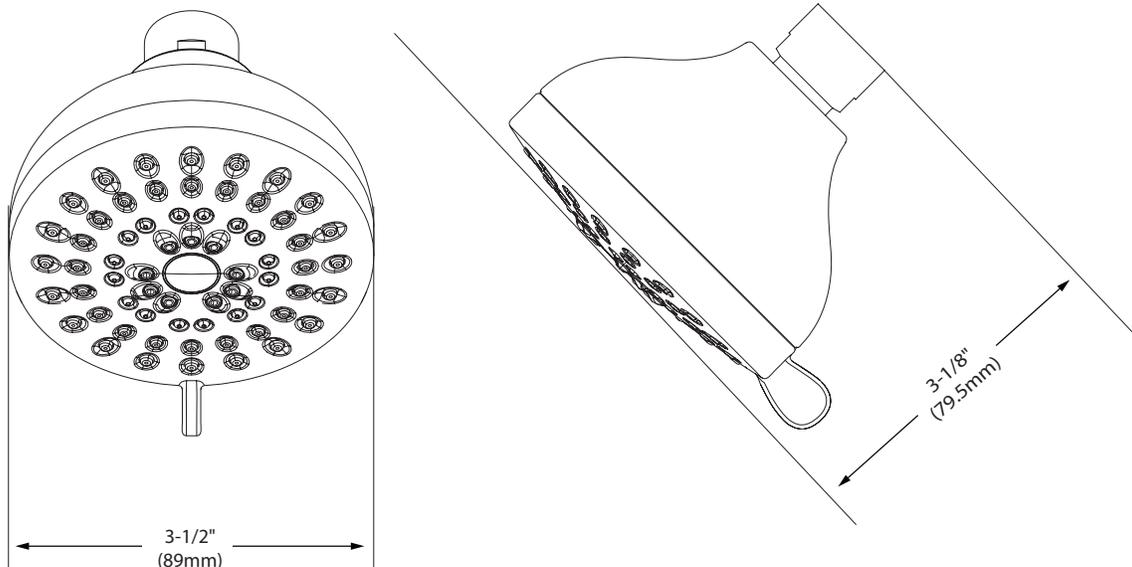

CRITICAL DIMENSIONS

(DO NOT SCALE)