

DESCRIPTION

- Metal construction with chrome plated finish
- Includes metallic shower arm and flange, non-metallic showerhead and non-metallic diverter tub spout

OPERATION

- Lever style handle operates counterclockwise through a 270° arc with off at 6 o'clock and maximum hot at the 9 o'clock position. Shut off in clockwise direction
- Adjustable temperature limit stop to control maximum hot water temperature
- Pressure balancing mechanism maintains selected discharge temperature to $\pm 3^\circ$

FLOW

- EP suffix models are limited to 1.75 gpm (6.6 L/min) at 80 psi

CARTRIDGE

- 1222 cartridge design
- Accommodates back to back installations
- Nonmetallic/nonferrous and stainless steel material

STANDARDS


- Third party certified to meet ASME A112.18.1/CSA B125.1 and all applicable requirements referenced therein
- EP suffix models are third party certified to WaterSense®

- **ADA**  for lever handle

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
- 10 year limited warranty when used in a multifamily installation
- 5 year limited warranty when used in a commercial installation

Visit www.moen.com/support for complete details and limitations

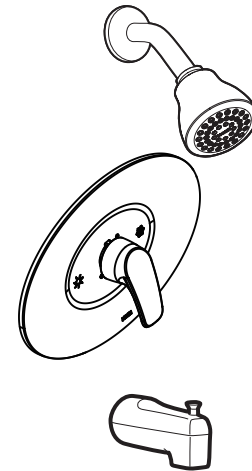

CHATEAU® POSI-TEMP® Single-Handle Tub/Shower Trim Kit

Models: TL23568EP series - shower trim only
L23568EP series - shower trim only
TL23569EP series - tub/shower trim
L23569EP series - tub/shower trim

Valves: 62300 series
2500 series

