

### DESCRIPTION

- Fixed mount showerhead
- Various finishes identified by suffix
- 1/2" IPS connection

### OPERATION

- Five functions
- Rotate outer ring to select function

### FLOW

- Designed to deliver 1.75 gpm (6.6 L/min) MAX at 80 psi


### STANDARDS

- Third party certified at WaterSense®, ASME A112.18.1/ CSA B125.1 and all applicable requirements referenced therein
- Products marked with 1.75 gpm are compliant with the California water efficiency regulations

### WARRANTY


- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
- 10 year limited warranty when used in a multifamily installation
- 5 year limited warranty when used in a commercial installation

Visit [www.moen.com/support](http://www.moen.com/support) for complete details and limitations

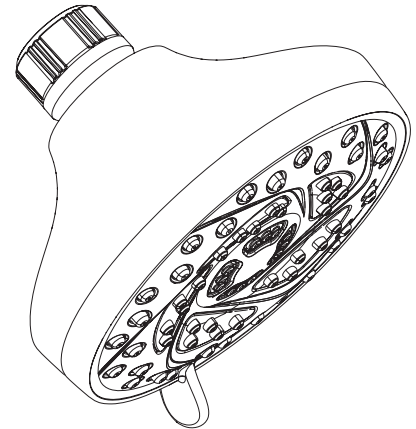

**Propel™**  
**5-Function Showerhead**

**Model:** 26041 series

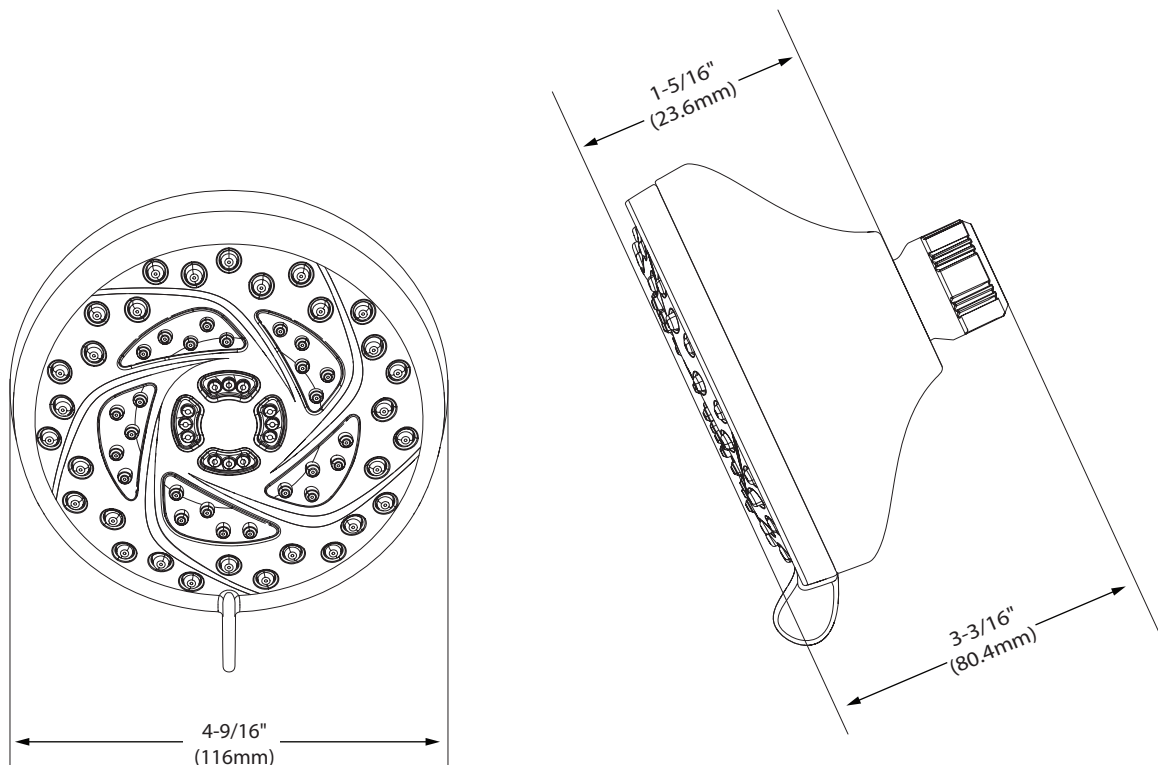

### **CRITICAL DIMENSIONS**

(DO NOT SCALE)