

## DESCRIPTION

- Metal construction with Spot Resist Brushed Nickel finish
- Includes handshower, hose, and cradle
- 59" double interlock spiral chrome hose (metal)
- Assembled with two check valves for backflow prevention
- Adjustable bracket

## OPERATION

- Six function
- Wall bracket rotates to adjust angle of handshower

## FLOW


- Designed to deliver 1.75 gpm (6.62 L/min)  
*(for models manufactured after 3/1/18)*
- Designed to deliver 2.0 gpm (7.6 L/min)  
*(for models manufactured before 3/1/18)*

## STANDARDS

- Third party certified at WaterSense®, ASME A112.18.1/CSA B-125.1, ASSE 1014 and all applicable specifications referenced therein
- Products marked with 1.75 gpm are compliant with California water efficiency regulations


## WARRANTY

- Lifetime limited warranty against material or manufacturing defects to the original homeowner
  - 10 year limited warranty when used in a multifamily installation
  - 5 year limited warranty when used in a commercial installation
- Visit [www.moen.com/support](http://www.moen.com/support) for the complete details and limitations

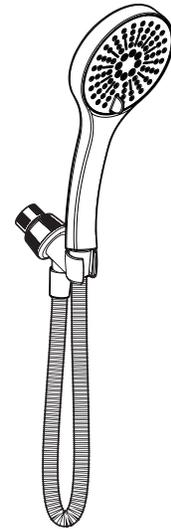

**Iso™**  
**Handshower**  
**with Bracket & Hose**

**Models: 26056SRN**

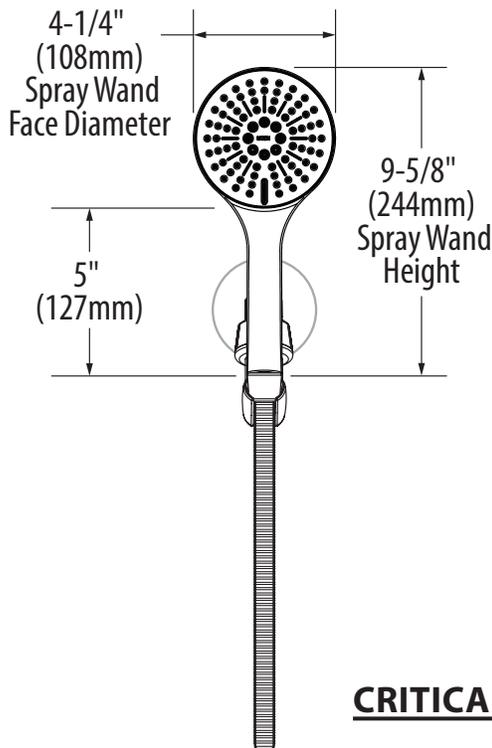

## CRITICAL DIMENSIONS

(DO NOT SCALE)

