



Specifications

DESCRIPTION

- Various finishes identified by suffix
- Handshower with adjustable Magnetix™ docking
- 60" double interlock spiral hose (metal)

OPERATION

- Six function
- Magnetix™ docking rotates to adjust angle of handshower

FLOW

- Designed to deliver 1.75 gpm (6.62 L/min) max. at 80 psi
(for models manufactured after 3/1/2018)
- Designed to deliver 2.0 gpm (7.6 L/min) max. at 80 psi
(for models manufactured before 3/1/2018)


STANDARDS

- Third party certified at: WaterSense®, ASME A112.18.1/CSA B-125.1, ASSE 1014 and all applicable specifications referenced therein
- Products marked with 1.75 gpm are compliant with California water efficiency regulations

WARRANTY

- Lifetime limited warranty against material or manufacturing defects to the original homeowner
- 10 year limited warranty when used in a multifamily installation
- 5 year limited warranty when used in a commercial installation

Visit www.moen.com/support for complete details and limitations

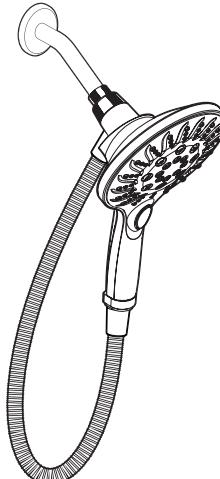


Attract™

6-Function Handshower
with Bracket & Hose

Models: 26602 series



Certified by
IAPMO R&T

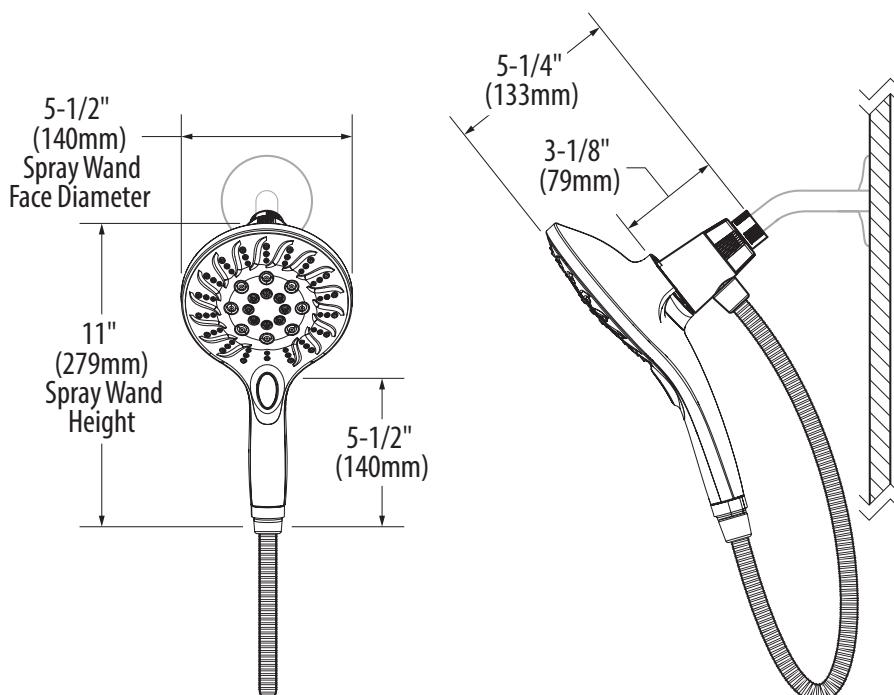

CRITICAL DIMENSIONS

(DO NOT SCALE)