



Buy it for looks. Buy it for life.®

# Specifications

## FAUCET DESCRIPTION

- Metal construction with various finishes identified by suffix
- 1/2" IPS connections will accept standard ball nose connection for 3/8" tubing
- Carbon block filter technology manufactured by Culligan®
- Electronic filter life indicator takes standard 2032 watch battery (included)
- Includes Protégé side spray

## OPERATION

- Lever style handle
- Temperature controlled by 180° arc of handle travel
- Will operate with less than 5 lbs. of force
- Filtered water dispenses through separate channel

## FLOW

- Unfiltered flow is limited to 2.2 gpm @ 60 psi (8.3 L/min).
- Filtered flow is limited to .5 gpm

## CARTRIDGE

- 1225 cartridge design
- Nonmetallic, nonferrous and stainless steel material

## STANDARDS

### Faucet

- Complies with: CSA B-125, ASME A112.18.1M, IAPMO PS 49, NSF 61 Section 9, California Proposition 65, ANSI A117.1, ADA and the Federal Safe Water Drinking Act

### Filter - MicroTech 600

- Complies with: NSF42-Chlorine reduction, Class I; Taste and Odor reduction
- ADA  for lever handle

## WARRANTY

### Faucet


- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations

### Filtering Appliance

- One year limited warranty on manufacturer's defects to the original consumer purchaser
- 6 month warranty if used in commercial installations

### Filter

- 30 day warranty on manufacturer's defects

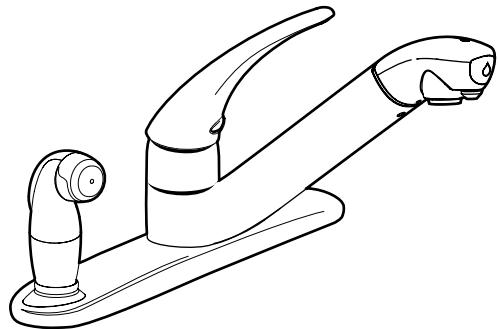


**PureTouch® Classic™  
Single-Handle Kitchen Filtering Faucet with  
Protégé Side Spray in Deck Plate**

**Model:** 7034 series

**Retail:** 87034 series

**DISCONTINUED SKUS:** 7034W, 7034S, 7034SL,  
87034SL, 87034

**NOTE:** DESIGNED TO INSTALL THROUGH 3 HOLES  
1-1/4" (32mm) MIN. DIA. AND 4" (102mm) ON CENTER.

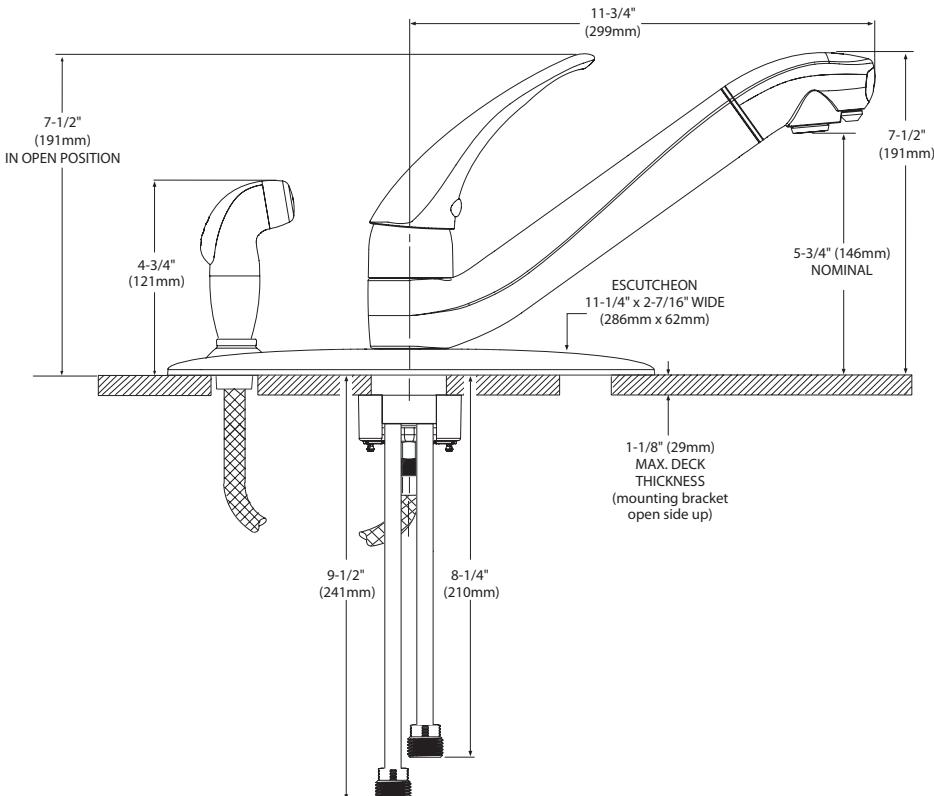

## CRITICAL DIMENSIONS

(DO NOT SCALE)

**FOR MORE INFORMATION CALL: 1-800-BUY-MOEN**

[www.moen.com](http://www.moen.com)