

Buy it for looks. Buy it for life.®

There is more than 1 version of this model. Page down to identify the version you have.

DESCRIPTION

- · Metal construction with various finishes identified by suffix
- Flexible supplies with 3/8" compression fittings
- Includes matching finish side spray in escutcheon

OPERATION

- Lever style handle
- Temperature controlled by 100° arc of handle travel
- Will operate with less than 5 lbs. of force

FLOW

Aerator is limited to 2.2 gpm (8.3 L/min).

CARTRIDGE

1255™ Duralast™ cartridge


STANDARDS

- Third party certified to CSA B125.1, ASME A112.18.1, , and all applicable requirements referenced therein including NSF 61/9
- Contains no more than 0.25% weighted average lead content
 Complies with California Proposition 65 and with the Federal Safe
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- ADA for lever handle

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations

Specifications




CASTLEBY™ Single-Handle Lever Kitchen Faucet

Models: 7309 series

Bulk Models: 67309 series (packed 12 per carton)

NOTE: DESIGNED TO INSTALL THROUGH 3 HOLES 1-1/4" (32MM) MIN. DIA. AND 4" (102MM) ON CENTER

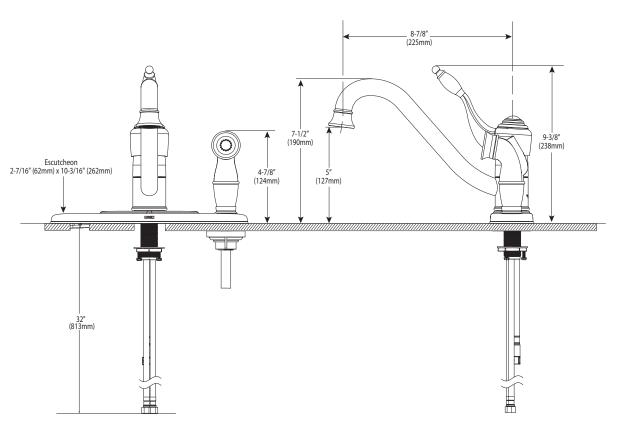

CRITICAL DIMENSIONS


(DO NOT SCALE)

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN www.moen.com



Buy it for looks. Buy it for life.®

Specifications



CASTLEBY™ Single-Handle Lever Kitchen Faucet

Models: 7309 series

Bulk Models: 67309 series (packed 12 per carton)

NOTE: DESIGNED TO INSTALL THROUGH 3 HOLES 1-1/4" (32MM) MIN. DIA. AND 4" (102MM) ON CENTER

DESCRIPTION

- · Metal construction with various finishes identified by suffix
- 1/2" IPS connections will accept standard ball nose connection for 3/8" tubing
- Includes matching finish side spray in escutcheon

OPERATION

- Lever style handle
- Temperature controlled by 180° arc of handle travel
- Will operate with less than 5 lbs. of force

FLOW

• Aerator is limited to 2.2 gpm (8.3 L/min).

CARTRIDGE


- 1225 cartridge design
- Nonmetallic, nonferrous and stainless steel material

STANDARDS

- Third party certified to CSA B125.1, ASME A112.18.1, ICC A117.1, and all applicable requirements referenced therein including NSF 61/9
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- ADA for lever handle

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations

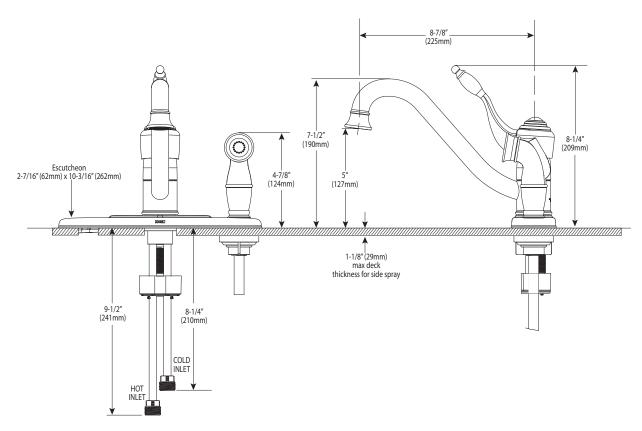

CRITICAL DIMENSIONS

(DO NOT SCALE)

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN www.moen.com