

FAUCET DESCRIPTION

- Updated style with a curved receptor and wand for increased height & reach in sink
- Flush button with raised stream and spray indicators
- Metal construction with 8 finishes
- Includes 59" hose
- 1/2" IPS connections will accept standard ball nose connection for 3/8" tubing

OPERATION

- Loop style handle
- Temperature controlled by 180° arc of handle travel
- Spout receptor rotation is 145°
- Operates with less than 5 lbs. of force
- Operates in stream or spray mode in the pullout or retracted position
- Built in vacuum breaker

FLOW

- Flow is limited to 2.2 gpm (8.3 L/min) at 60 psi

CARTRIDGE



- 1225 cartridge design
- Engineered polymers, non-ferrous and stainless steel materials

STANDARDS

- Designed and manufactured to comply with the requirements of: CSA B-125, ASME A112.18.1M, IAPMO PS 49-92, NSF 61 Section 9, California Proposition 65, ANSI A117.1, ADA

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations

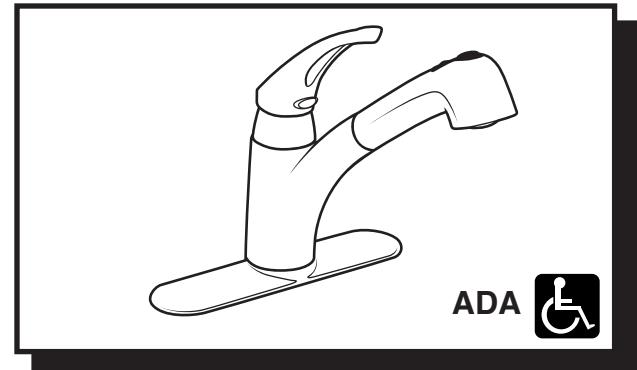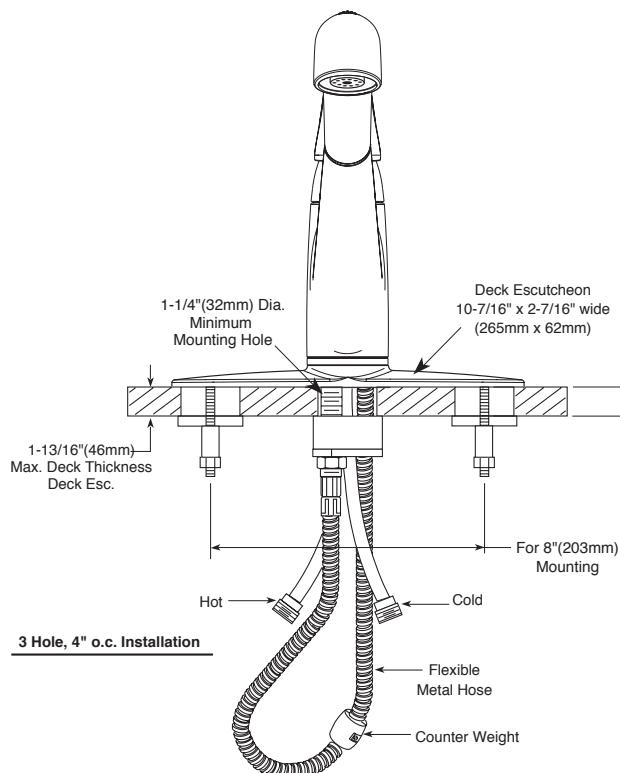


extensa™
Single Control Kitchen Faucet
w/Pullout Spray

**Models: 7580, 7580C, 7580CS, 7580S,
7580W, 7580V, 7580CBL, 7580BL**

**NOTE: See reverse side
for illustrated parts**

**NOTE: DESIGNED TO INSTALL
THRU 1 OR 3 HOLES 1-1/4" (32mm) MIN. DIA.**

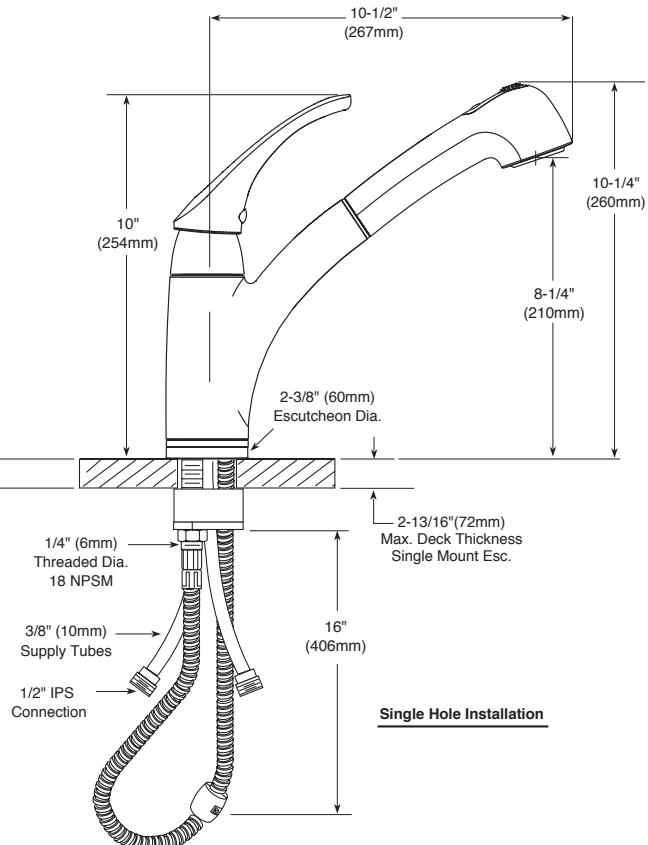

CRITICAL DIMENSIONS

(DO NOT SCALE)