

DESCRIPTION

- Metal construction
- Operates in aerated stream and PowerClean™ spray
- Reflex™ pulldown system with 68" of braided hose for smooth operation, easy movement and secure wand-docking
- 3/8" compression connections compatible with standard ball nose connection for 3/8" tubing.
- Compatible with 1 and 3 hole installations (141002 deck plate sold separately)

OPERATION

- Lever style handle
- Operates with less than 5 lbs. of force
- Operates in stream or spray mode in the pullout or retracted position

FLOW

- Flow is limited to 1.5 gpm (5.7 L/min) max at 60 psi

CARTRIDGE


- 1269 ceramic disc cartridge for single-handle faucets

STANDARDS

- Third party certified to IAPMO Green, ASME A112.18.1/CSA B 125.1 and all applicable requirements referenced therein including NSF 61/9 & 372
- Meets CalGreen and Georgia SB370 requirements
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- ADA ♿ for lever handle
- The backflow protection system in this device consists of two independently operating check valves, a primary and a secondary which prevent backflow

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
 - 10 year limited warranty when used in a multifamily installation
 - 5 year limited warranty when used in a commercial installation
- Visit www.moen.com/support for complete details and limitations

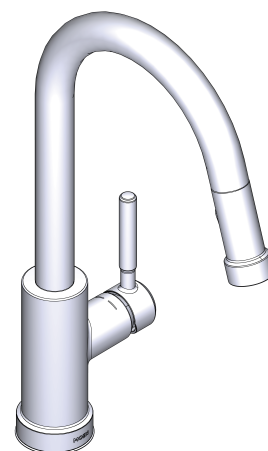

Kivo™
Single-Handle Pulldown Kitchen Faucet

MODELS: 7606 series

NOTE: This faucet is designed to be installed through 1 or 3 Holes, 1-1/2" (38mm) Min. Dia.

