



Buy it for looks. Buy it for life.®

Specifications

FAUCET DESCRIPTION

- Metal construction with chrome plated or stainless finish
- 1/2" IPS connections
- Lever style handles (less handle inserts)
- Handle inserts include hot (red) and cold (blue) color indicators

OPERATION

- Hot side counterclockwise to open (clockwise to close)
- Cold side clockwise to open (counterclockwise to close)

FLOW

- Aerator is limited to 2.2 gpm (8.3 L/min).

CARTRIDGE


- 1224 cartridge design
- Nonmetallic, nonferrous and stainless steel material

STANDARDS

- Designed and manufactured to comply with the requirements of: CSA B-125, ASME A112.18.1M, ANSI A117.1 and all applicable requirements referenced therein
- Certified to ANSI/NSF 61/9
- Complies with California Proposition 65 and with the Federal Safe Water Drinking Act

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations

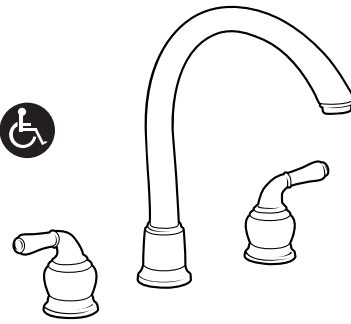


Monticello® with Cathedral™ Spout
Two Handle Kitchen Faucet
 (less handle inserts on 7000 series,
 handle inserts included on 80000 series)

Models: 7785, 7785SL,
 87785, 87785SL

Discontinued Models: 7785CP, 7785P,
 R7785/A7785, R7785P/A7785P,
 R7785CG/A7785CG, R7785CPR/A7785CPR,
 R7785PM/A7785PM, R7785BP/A7785BP,
 R7785ST/A7785ST

Spout installs through deck holes a minimum of 1-1/4" (32mm) in diameter. Valves install through 1-1/8" (28mm) min. diameter hole.

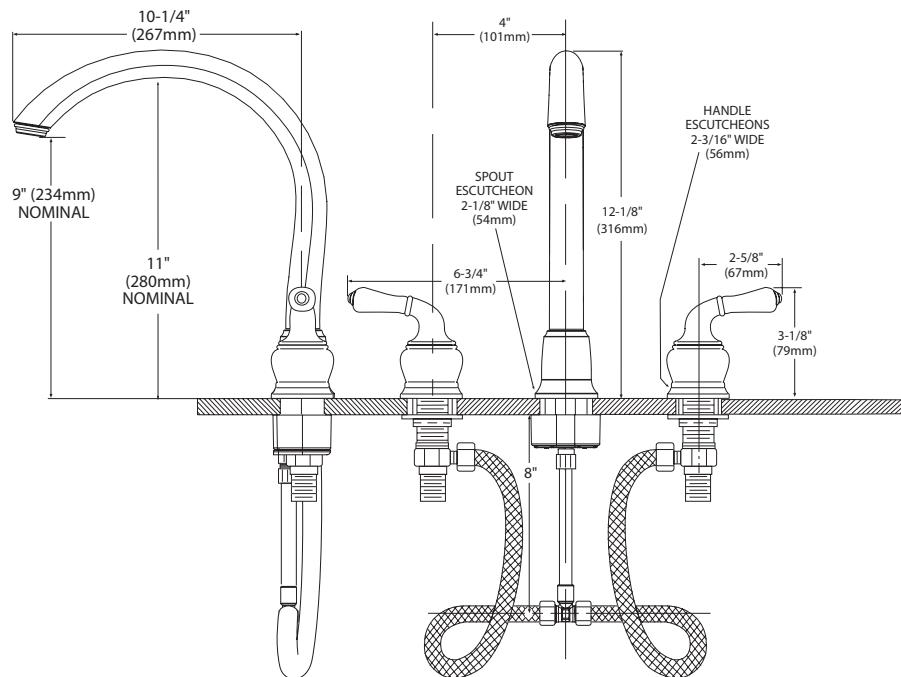

CRITICAL DIMENSIONS

(DO NOT SCALE)

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN

www.moen.com