



Buy it for looks. Buy it for life.®

Specifications

FAUCET DESCRIPTION

- Metal construction with various finishes identified by suffix
- 1/2" IPS connections will accept standard ball nose connection for 3/8" tubing
- Includes 59" hose

WAND APPLIANCE DESCRIPTION

- Pullout spout with quarter turn connector
- Electronic filter life indicator takes standard 2032 watch battery (included)

FILTER DESCRIPTION

- Carbon block technology manufactured by Culligan®

OPERATION

- Temperature controlled by 180° arc of handle travel
- Receptor rotation is 130°
- Unfiltered water dispensed in stream or spray mode
- Filtered water dispensed through separate channel
- Built in vacuum breaker

FLOW

- Unfiltered flow is limited to 2.2 gpm (8.3 L/min) at 60 psi
- Filtered flow is limited to .5 gpm

CARTRIDGE

- 1225 cartridge design


STANDARDS

Faucet:

- Complies with: CSA B-125, ASME A112.18.1M, IAPMO PS 49, NSF 61 Section 9, California proposition 65, ANSI A117.1, ADA

Filter:

- MicroTech 5000
- Complies with NSF42-Chlorine reduction, Class I; Taste and Odor reduction
- ADA  for lever handle



PureTouch®

Single Control Kitchen Faucet with Water Filter & Pullout Spray

Models: 7850 series

WARRANTY

Faucet:



- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations

Wand Appliance:

- 1 year limited warranty on manufacturer's defects to the original consumer purchaser
- 6 month warranty if used in commercial installations

Filter:

- 30 day warranty on manufacturer's defects

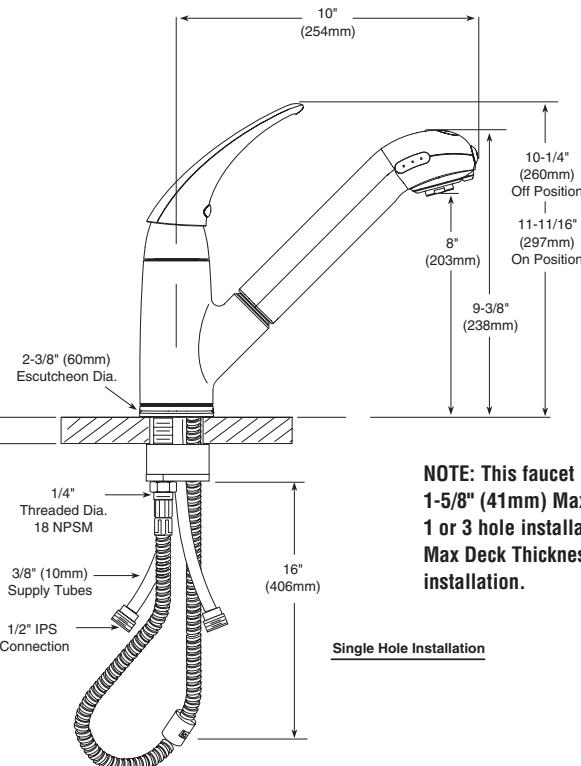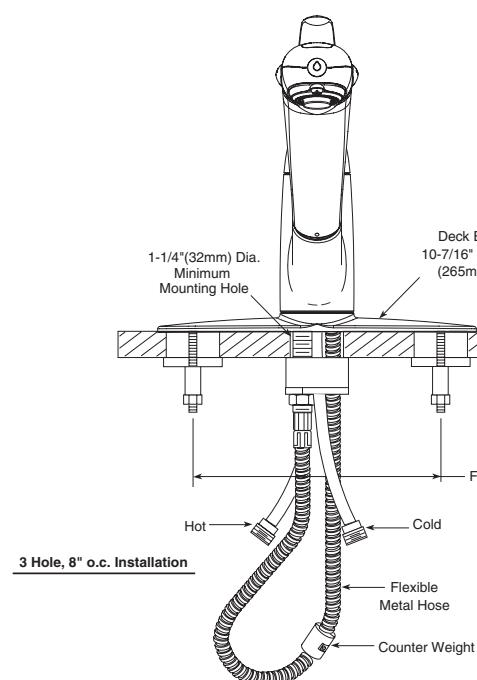

NOTE: This faucet is designed for:
1-5/8" (41mm) Max Deck Thickness for
1 or 3 hole installation and 2" (51mm)
Max Deck Thickness for single hole
installation.

CRITICAL DIMENSIONS

(DO NOT SCALE)

TO ORDER PARTS CALL: 1-800-BUY-MOEN

www.moen.com