

## DESCRIPTION

- Brass construction with chrome plated finish
- 3/8" compression connections

## OPERATION

- Lever style handle
- Temperature controlled through 110° arc of handle
- Operates with less than 5 pounds of force


## FLOW

- Compatible with S-Series spouts
- S-Series spouts come standard with a 2.2gpm max (8.3 L/min) aerator

## CARTRIDGE


- 1255™ Duralast® 40mm cartridge with all brass adjustable temperature limit stop and cartridge nut
- Nonmetallic/nonferrous and ceramic material

## STANDARDS

- Third party certified to meet ASME A112.18.1/CSA B125.1, NSF 61/9 and all applicable requirements referenced therein
- Contains no more than 0.25% weighted average lead content
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- **ADA**  for lever handles

## WARRANTY

- Warranted for 5 years against material or manufacturing defects

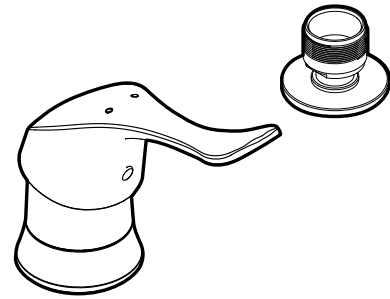


## Single Handle Multi-Purpose Faucet Less Spout

Models: 8125



**NOTE:** Designed to be installed through 2 holes - 1-1/2" min. dia.

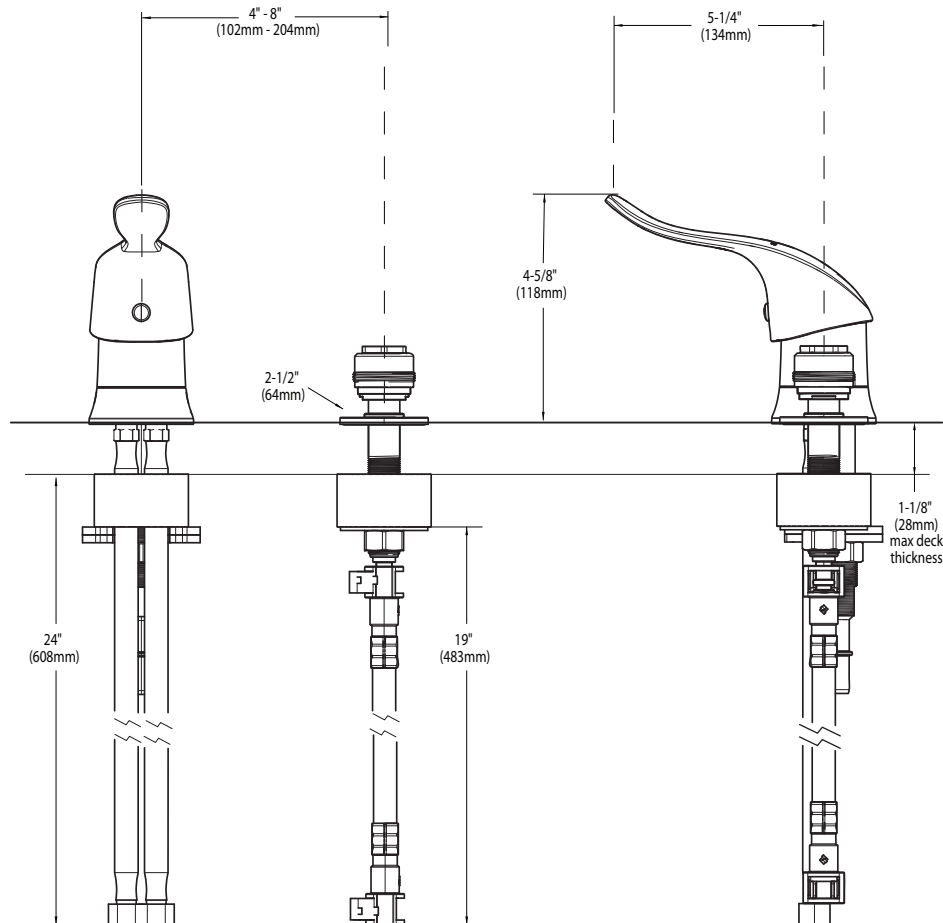

## CRITICAL DIMENSIONS

(DO NOT SCALE)