

Buy it for looks. Buy it for life.®

DESCRIPTION

- Metal and plastic construction with chrome plated finish
- Includes adjustable showerhead, arm, flange and diverter spout

OPERATION

- Handle operates counterclockwise through a 270° arc with off at 6 o'clock and maximum hot at the 9 o'clock position. Shut off in clockwise direction
- Adjustable temperature limit stop to control maximum hot water temperature
- Pressure balancing mechanism maintains selected discharge temperature to $\pm 2^{\circ}$

FLOW

Showerhead is limited to 2.5 gpm (9.5 L/min)

CARTRIDGE

- 1222 cartridge design
- Nonmetallic/nonferrous and stainless steel materials
- Accommodates back to back installations


STANDARDS

 Third party certified to CSA B125, ASME A112.18.1M, ANSI A117.1 and all applicable standards referenced therein

WARRANTY


- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations

Specifications



POSI-TEMP® Single-Handle Tub/Shower

Model: 82576

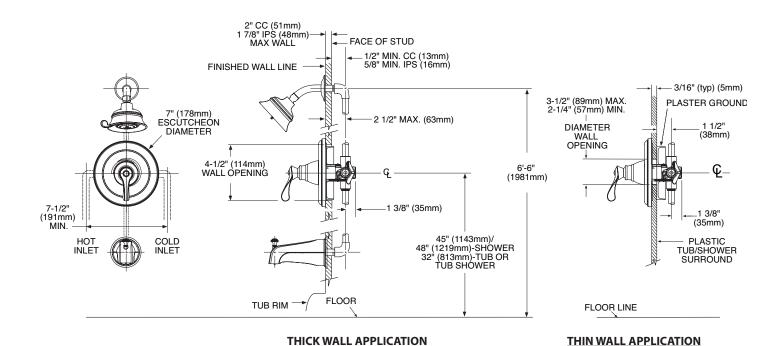

CRITICAL DIMENSIONS

(DO NOT SCALE)