

# MOEN®

# Specifications

## DESCRIPTION

- Chrome plated metal construction
- 1/2" connections: IPS - exterior, CC - interior
- Includes showerhead, arm and flange

## OPERATION

- Dual control
- Lever handles
- Volume and temperature controlled by rotating handles toward spout to open


## FLOW

- Showerhead is designed to deliver 1.75 gpm (6.6 L/min) max.  
(for models manufactured after 3/1/18)
- Showerhead is designed to deliver to 2.5 gpm (9.5 L/min) max.  
(for models manufactured before 3/1/18)

## CARTRIDGE


- 1224 cartridge design
- Nonmetallic and stainless steel materials

## STANDARDS

- Third party certified to: WaterSense®, ASME A112.18.1/CSA B125.1, and all applicable requirements referenced therein
- Products marked with 1.75 gpm are compliant with California water efficiency regulations
- ADA  for lever handles
- Meets WaterSense® criteria
- Meets New York City Local Law No. 57

## WARRANTY


- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
  - 10 year limited warranty when used in a multifamily installation
  - 5 year limited warranty when used in a commercial installation
- Visit [www.moen.com/support](http://www.moen.com/support) for complete details and limitations

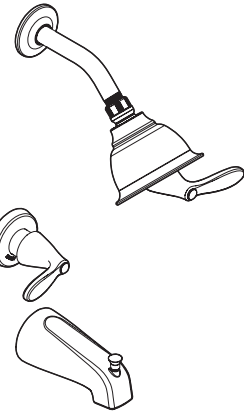

**Adler™**  
**Two-Handle Tub/Shower Valve**  
**Model: 82602 Chrome**



**Showerhead 183064 is listed**

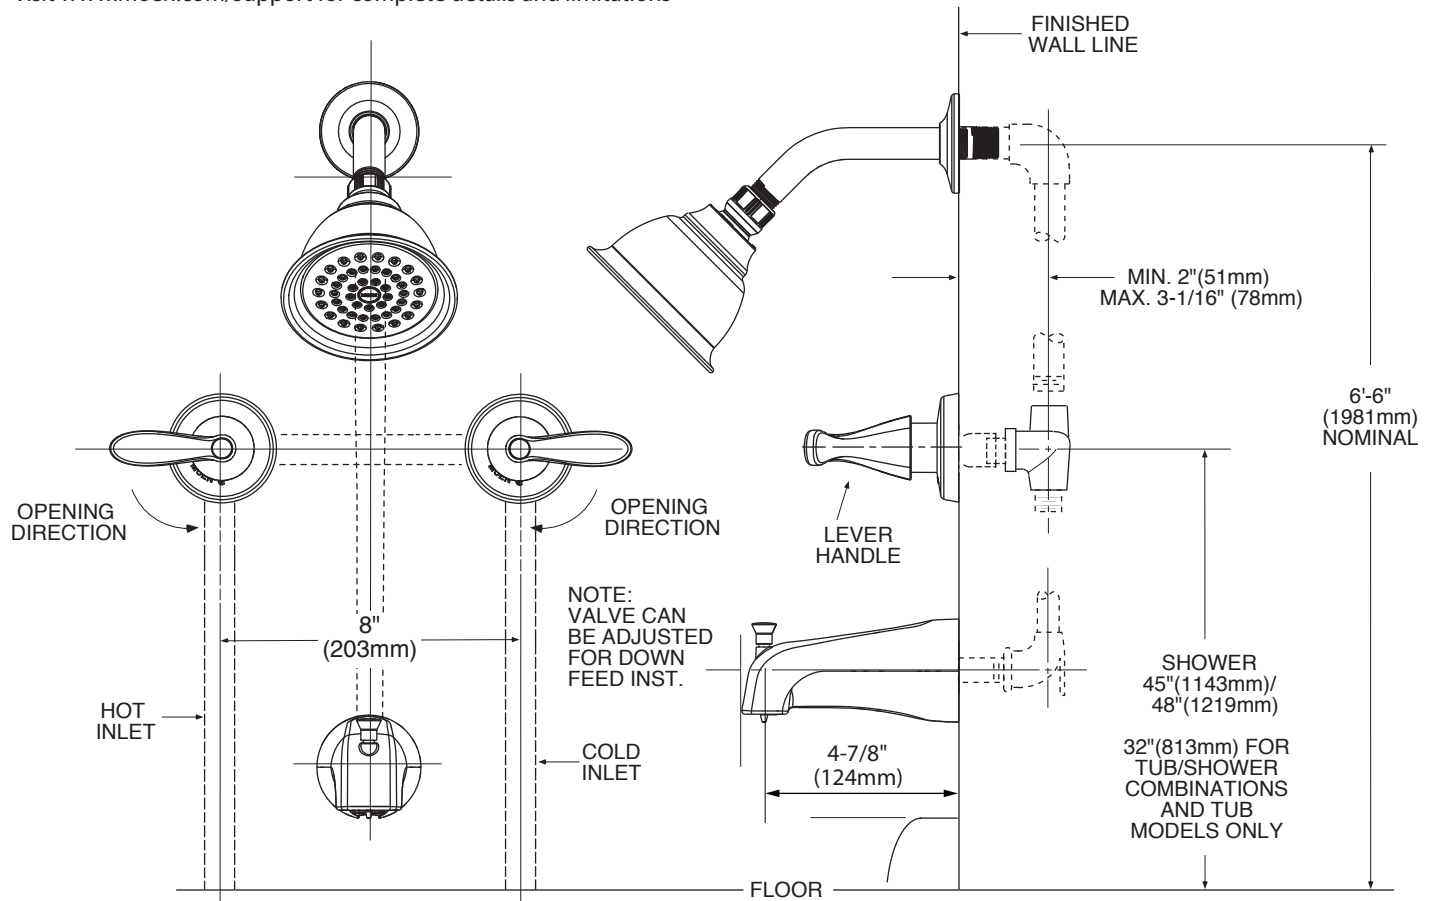

## CRITICAL DIMENSIONS

(DO NOT SCALE)