

DESCRIPTION

- Includes handshower, hose and magnetic dock
- Magnetix™ technology features an innovative magnetic docking system
- 60" double interlock spiral hose (metal), for Spot Resist Brushed Nickel finish
- Pressure balancing cycle valve design with an adjustable temperature limit stop
- 1/2" IPS connections

OPERATION

- Lever style handle
- Six functions
- Push button feature to change functions
- Handle operates counterclockwise through a 270° arc with off at 6 o'clock and maximum hot at the 9 o'clock position. Shut off in clockwise direction
- Adjustable temperature limit stop to control maximum hot water temperature
- Pressure balancing mechanism maintains selected discharge temperature to ± 2°


FLOW

- Designed to deliver 1.75 gpm (6.6 L/min) max. at 80 psi

CARTRIDGE


- 1222 cartridge design
- Nonmetallic/nonferrous and stainless steel materials
- Accommodates back to back installations

STANDARDS

- Third party certified to ASME A112.18.1/CSA B-125.1 and all applicable requirements referenced therein
- **ADA**  for lever handles
- Products marked with 1.75 gpm are compliant with the California water efficiency regulations


WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
 - 10 year limited warranty when used in a multifamily installation
 - 5 year limited warranty when used in a commercial installation
- Visit www.moen.com/support for complete details and limitations

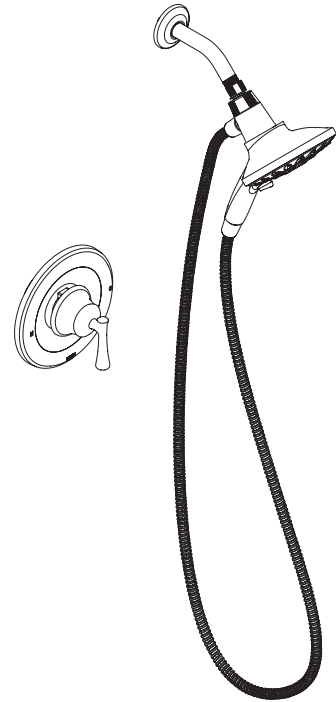

Attract™ Shower Only with Magnetix™

Model: 82975SRN

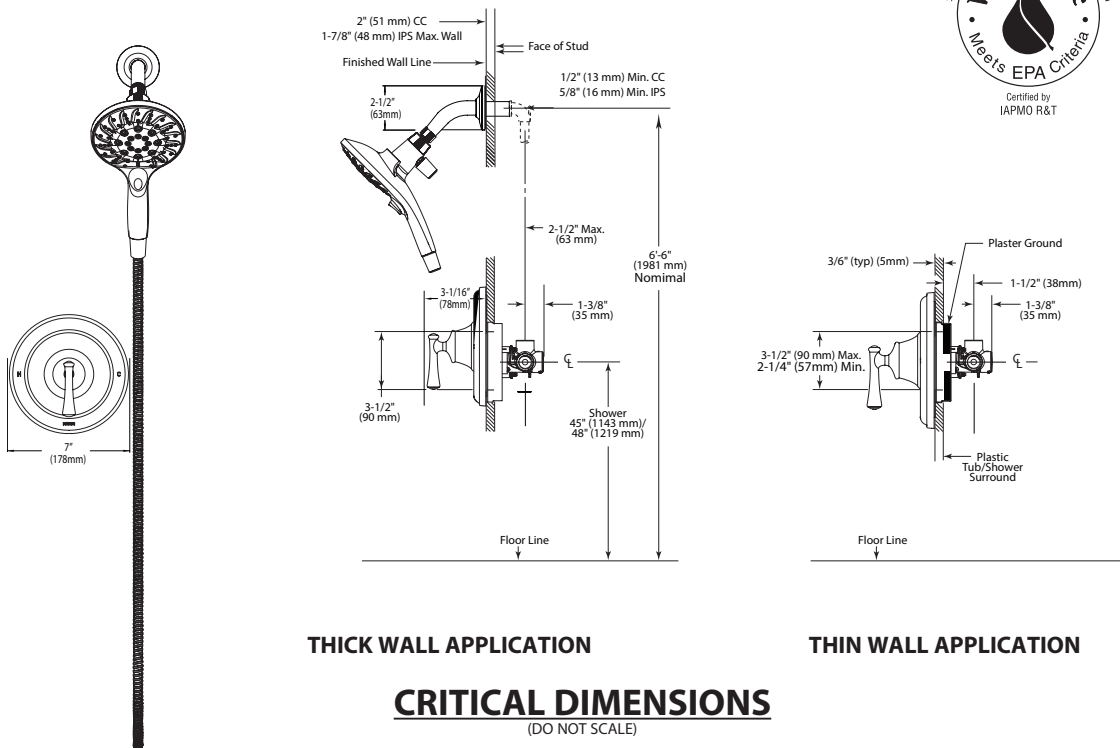

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN

www.moen.com