

FAUCET DESCRIPTION

- Chrome plated solid brass body
- Gooseneck single wall-mount faucet
- 5.75" x 6" x 10.25" gooseneck included, see reverse side for additional spouts

OPERATION

- Adjustable infrared sensor (range, turn off delay and obstruction delay)
- Temperature controlled by mixing valve or mixing tee (optional)
- Battery powered (AC optional)

FLOW

- 0.5 gpm (1.9 L/min) vandal-resistant multi-stream laminar flow

VALVES

- In-line filter included
- Slow close solenoid valve


STANDARDS

- Third party certified to meet ASME A112.18.1/CSA B125.1, and all applicable specifications referenced therein

- **ADA**  compliant



WARRANTY

- Warranted for 5 years against material or manufacturer defects

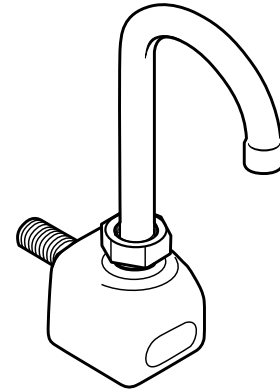

**Single Wall-Mount, Gooseneck,
Non-Mixing, Battery Powered
Electronic Faucet**

Model: 8304

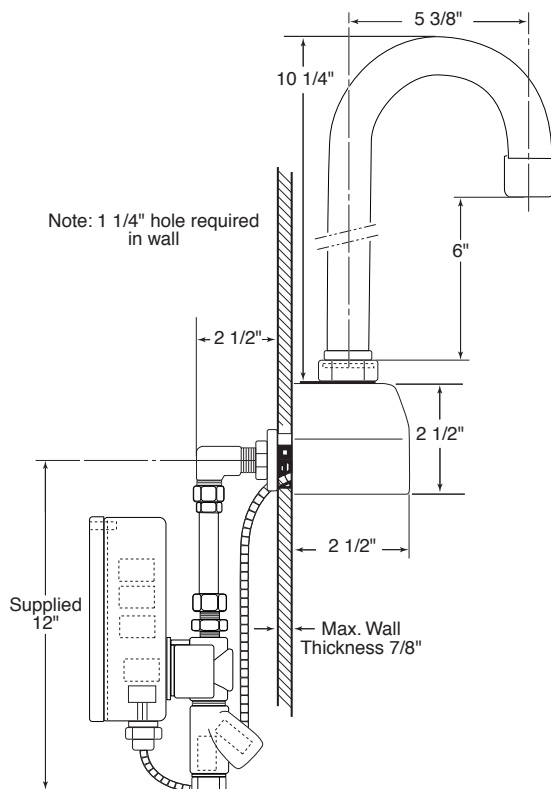

FRONT VIEW

CRITICAL DIMENSIONS

(DO NOT SCALE)