

**There is more than one version of this model.
Page down to identify the version you have.**

DESCRIPTION

- Chrome plated metal construction
- Pressure balancing cycle valve design with 1/4 turn stops
- 3 function transfer valve
- 1/2" CC connections
- Contains: stationary showerhead, hand-held shower with non-positive pause, 72" metal hose, 30" slide bar, drop ell, and tub filler
- **Slide bar is NOT DESIGNED TO BE A GRAB BAR**
- Applicable components are supplied with vandal resistant screws

OPERATION

- Temperature and transfer valves both have ADA compliant lever style handles
- Temperature handle operates counterclockwise through a 270° arc with off at 6 o'clock, and the maximum hot at the 9 o'clock position
- Adjustable temperature limit stop
- Pressure balancing mechanism maintains selected discharge temperature to ± 2°
- Transfer valve operates 3 distinct functions

FLOW

- 2.5 gpm (9.5L/min) maximum @ 80 psi

CARTRIDGE

- 1222HD brass cartridge design in temperature control valve accommodates back to back installations
- Brass construction with stainless steel materials
- Ceramic disc cartridge in transfer valve


STANDARDS

- Third party certified to ASME A112.18.1/CSA B125.1 and all applicable requirements referenced therein
- Backflow prevention compliance through ASME A112.18.3

- **ADA**  for lever handles

WARRANTY


- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
 - 10 year limited warranty when used in a multifamily installation
 - 5 year limited warranty when used in a commercial installation
- Visit www.moen.com/support for complete details and limitations

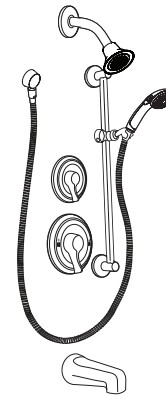

Three-Function Commercial Tub/Shower System



Model: 8343

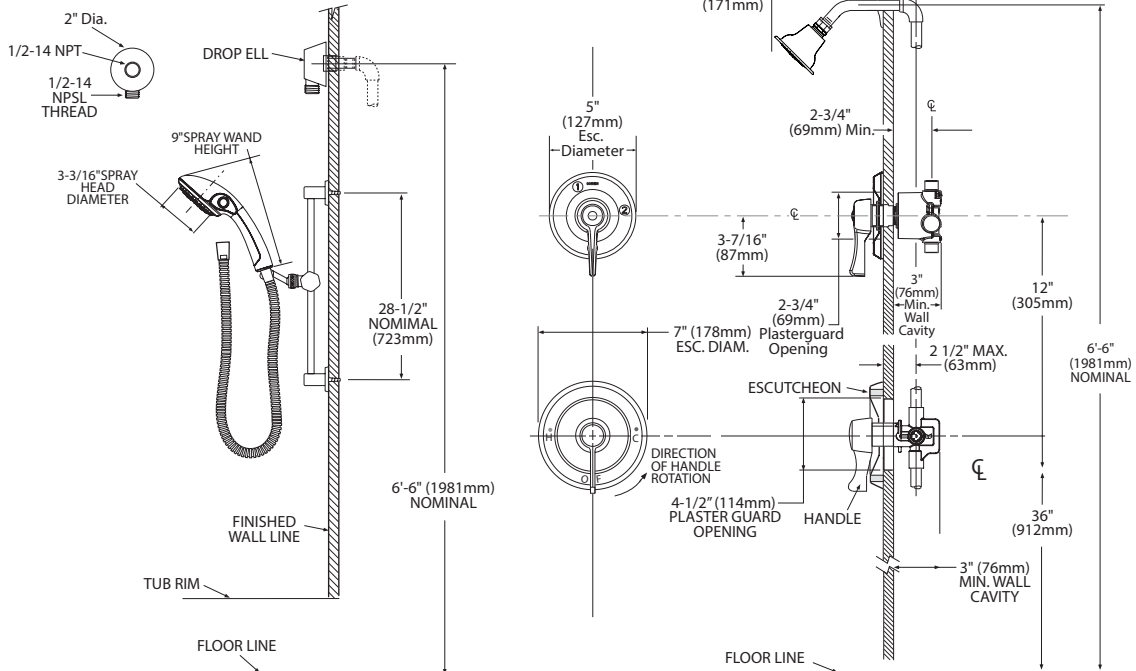

NOTE: This valve is not intended to be used as a shut-off valve. To prevent the potential of cross flow, check valves must be integral to the supply valve or installed in both hot and cold water supply lines.

CRITICAL DIMENSIONS

(DO NOT SCALE)

DESCRIPTION

- Chrome plated metal construction
- Pressure balancing cycle valve design with 1/4 turn stops
- 3 function transfer valve
- 1/2" CC connections
- Contains: stationary showerhead, hand-held shower with non-positive pause, 69" metal hose, 30" slide bar, drop ell, and tub filler
- **Slide bar is NOT DESIGNED TO BE A GRAB BAR**
- Applicable components are supplied with vandal resistant screws

OPERATION

- Temperature and transfer valves both have ADA compliant lever style handles
- Temperature handle operates counterclockwise through a 270° arc with off at 6 o'clock, and the maximum hot at the 9 o'clock position
- Adjustable temperature limit stop
- Pressure balancing mechanism maintains selected discharge temperature to ± 2°
- Transfer valve operates 3 distinct functions

FLOW

- 2.5 gpm (9.5L/min) hand-held shower and stationary shower head

CARTRIDGE

- 1222HD brass cartridge design in temperature control valve accommodates back to back installations
- Brass construction with stainless steel materials
- Ceramic disc cartridge in transfer valve


STANDARDS

- Third party certified to ASME A112.18.1/CSA B125.1 and all applicable requirements referenced therein
- Backflow prevention compliance through ASME A112.18.3

- **ADA**  for lever handles

WARRANTY


- Warranted for 5 years against material or manufacturing defects

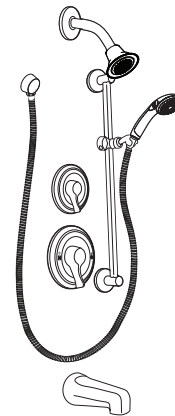

Three-Function Commercial Tub/Shower System



Model: 8343

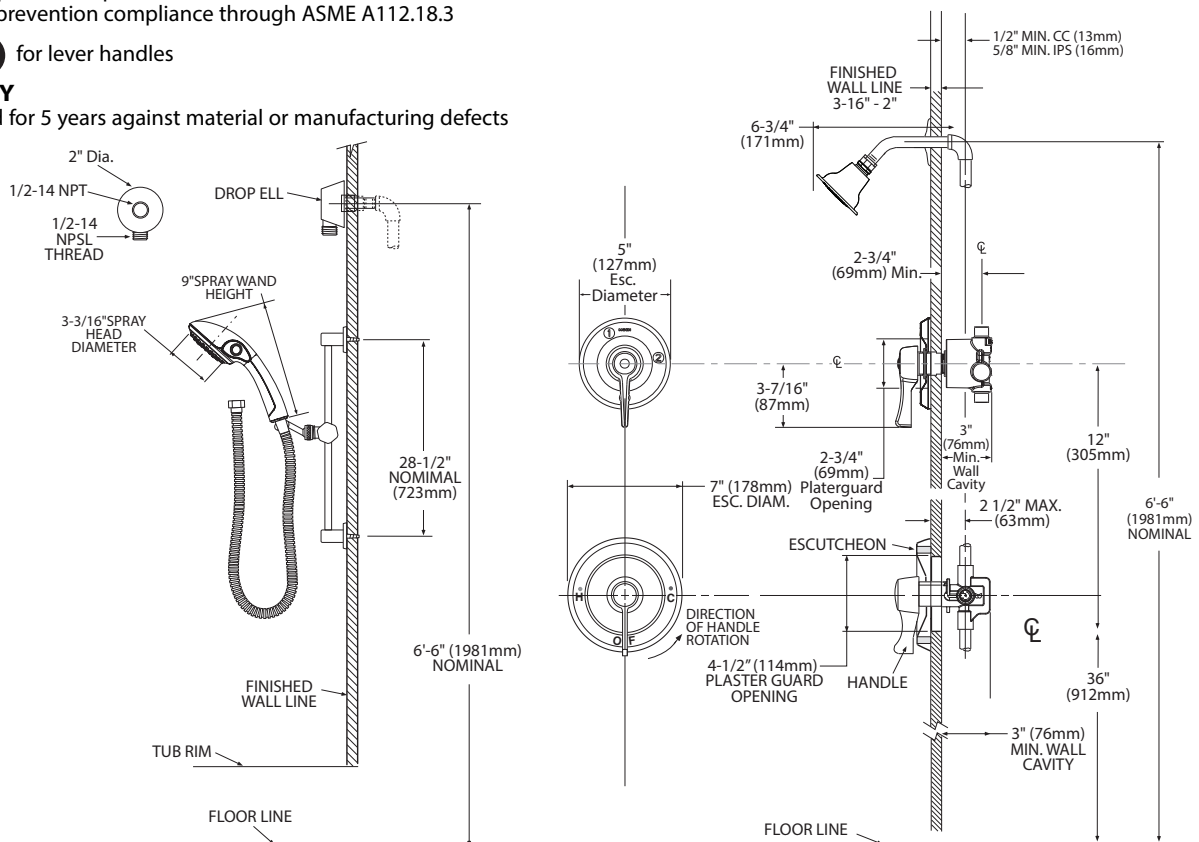

NOTE: This valve is not intended to be used as a shut-off valve. To prevent the potential of cross flow, check valves must be integral to the supply valve or installed in both hot and cold water supply lines.

CRITICAL DIMENSIONS

(DO NOT SCALE)