

## FAUCET DESCRIPTION

- Chrome plated metal construction
- Pressure balancing cycle valve design
- 1/2" CC connections with 1/4 turn stops
- Hand-held shower with non-positive includes drop ell, wall brackets, 69" metal hose and hardware
- Supplied with vandal resistant screws

## OPERATION

- Lever style handle with temperature indicator on the escutcheon
- Handle operates counterclockwise through a 270° arc with off at 6 o'clock, and maximum hot at the 9 o'clock position. Shut off in clockwise direction
- Adjustable temperature limit stop to limit the handle travel in the HOT direction
- Pressure balancing mechanism maintains selected discharge temperature to  $\pm 2^\circ$

## FLOW

- 2.5 gpm (9.5 L/min) Hand-Held shower head

## CARTRIDGE

- 1222HD brass cartridge design
- Brass construction with stainless steel materials
- Accommodates back to back installations


## STANDARDS

- Third party certified to ASME A112.18.1/CSA B125.1 and all applicable requirements referenced therein
- Backflow prevention compliance through ASME A112.18.3

- **ADA**  for lever handle

## WARRANTY

- Warranted for 5 years against material or manufacturing defects

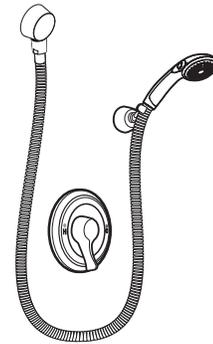


## Single Handle Pressure Balancing Shower Valve With Hand-Held Shower System

Model: 8348



**NOTE:** 13/16" is the maximum finished wall thickness. Specify part number 96945 extension kit for finished walls up to 1-13/16" thick, or part number 96955 extension kit for finished walls up to 2-13/16" ... as well as faucet model number

**NOTE:** Hand-held shower head with hose has been omitted from illustration for clarity.

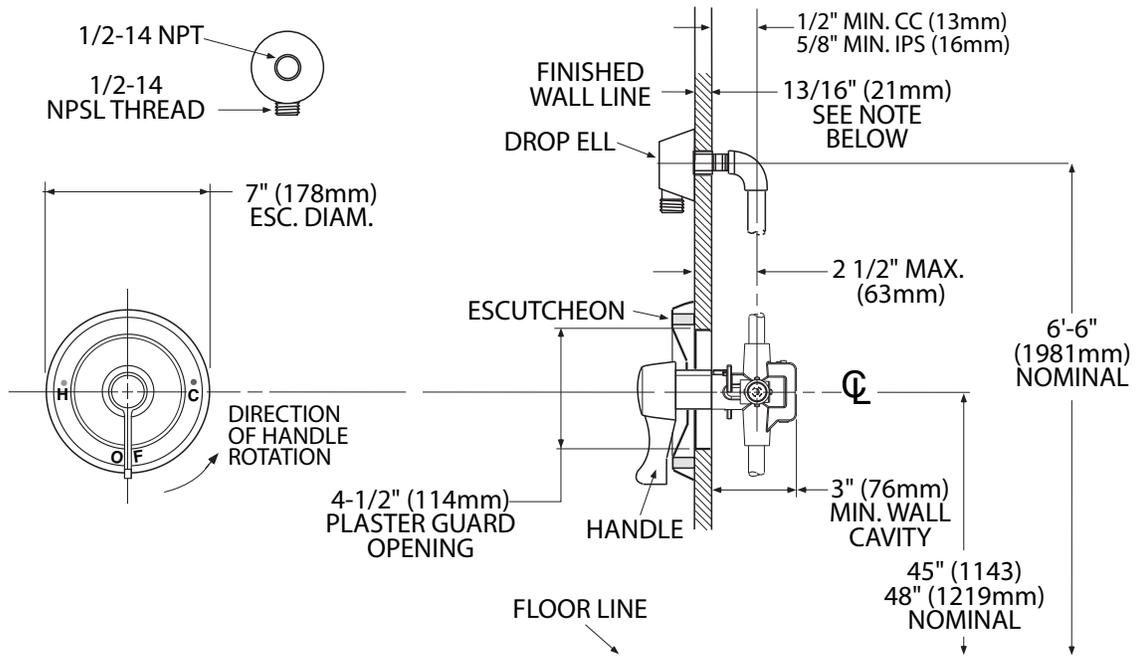

## CRITICAL DIMENSIONS

(DO NOT SCALE)