

#### DESCRIPTION

- Metal construction with various finishes identified by suffix
- Flexible supply lines with 3/8" compression fittings
- Includes non-metal push-down waste assembly
- Includes optional 3 hole deck plate (escutcheon)

## OPERATION

- $\cdot$  Lever style handle
- $\cdot\,$  Temperature controlled by 100° arc of handle travel

#### FLOW

- $\boldsymbol{\cdot}$  Water usage is limited to these maximum flow rates as
- indicated by the corresponding product markings
- $\cdot$  1.2 gpm max (4.5L/min) at 60 psi

## CARTRIDGE

- Ceramic disc technology
- $\cdot\,$  Non-metallic, non-ferrous, and brass materials
- $\cdot\,$  Single body construction for easy replacement

## STANDARDS

- Third party certified to WaterSense,<sup>®</sup> ASME A112.18.1/CSA B125.1, and all applicable requirements referenced therein
- Certified to NSF 61/9 & 372
- Products marked with 1.2 gpm are compliant with California water efficiency regulations
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act

## WARRANTY

- Lifetime limited warranty against material or
- manufacturing defects to the original homeowner
- 10 year limited warranty when used in a multifamily installation
- 5 year limited warranty when used in a commercial installation
- Visit www.moen.com/support for complete details and limitations

# Specifications




**Karis<sup>™</sup>** One-Handle Lavatory Faucet

MODELS: 84346 SERIES

## NOTE: THIS FAUCET INSTALLS THROUGH 1 HOLE, 1-1/8" (28mm) MIN. DIA.

ers

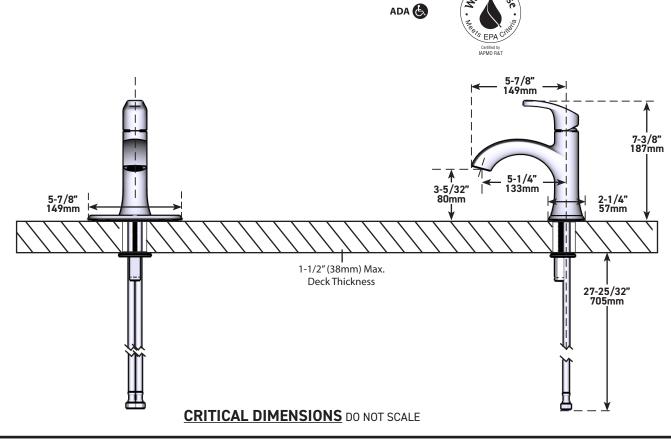

SPC21046

(0/21/2021 : Released 00