MOEN®

Specifications

There is more than one version of this model.
Page down to identify the version you have.



GENTA™
One-Handle Lavatory Faucet
Model: 84760
(includes deck plate)

NOTE: This faucet is designed to be installed thru 1 or 3 - 1” dia. holes, 2” on center

DESCRIPTION
- Metal construction with various finishes identified by suffix
- Flexible supply lines with 3/8” compression fittings
- Includes non-metalic pop-up waste assembly
- Includes optional 3 hole deck plate (escutcheon)

OPERATION
- Lever style handle
- Temperature controlled by 100˚ arc of handle travel

FLOW
- Water usage is limited to these maximum flow rates as indicated by the corresponding product markings
  º1.2 gpm max (4.5L/min) at 60 psi

CARTRIDGE
- 1255™ Duralast™ cartridge
- Nonmetallic/nonferrous and stainless steel material

STANDARDS
- Third party certified to WaterSense,® ASME A112.18.1/CSA B125.1, and all applicable requirements referenced therein
- Certified to NSF 61/9 & 372
- Products marked with 1.2 gpm are compliant with California water efficiency regulations
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- **ADA** ♿ for lever handle

WaterSense Meets EPA Criteria
Certified by IAPMO R&T

WARRANTY
- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
- 10 year limited warranty when used in a multifamily installation
- 5 year limited warranty when used in a commercial installation

Visit www.moen.com/support for complete details and limitations

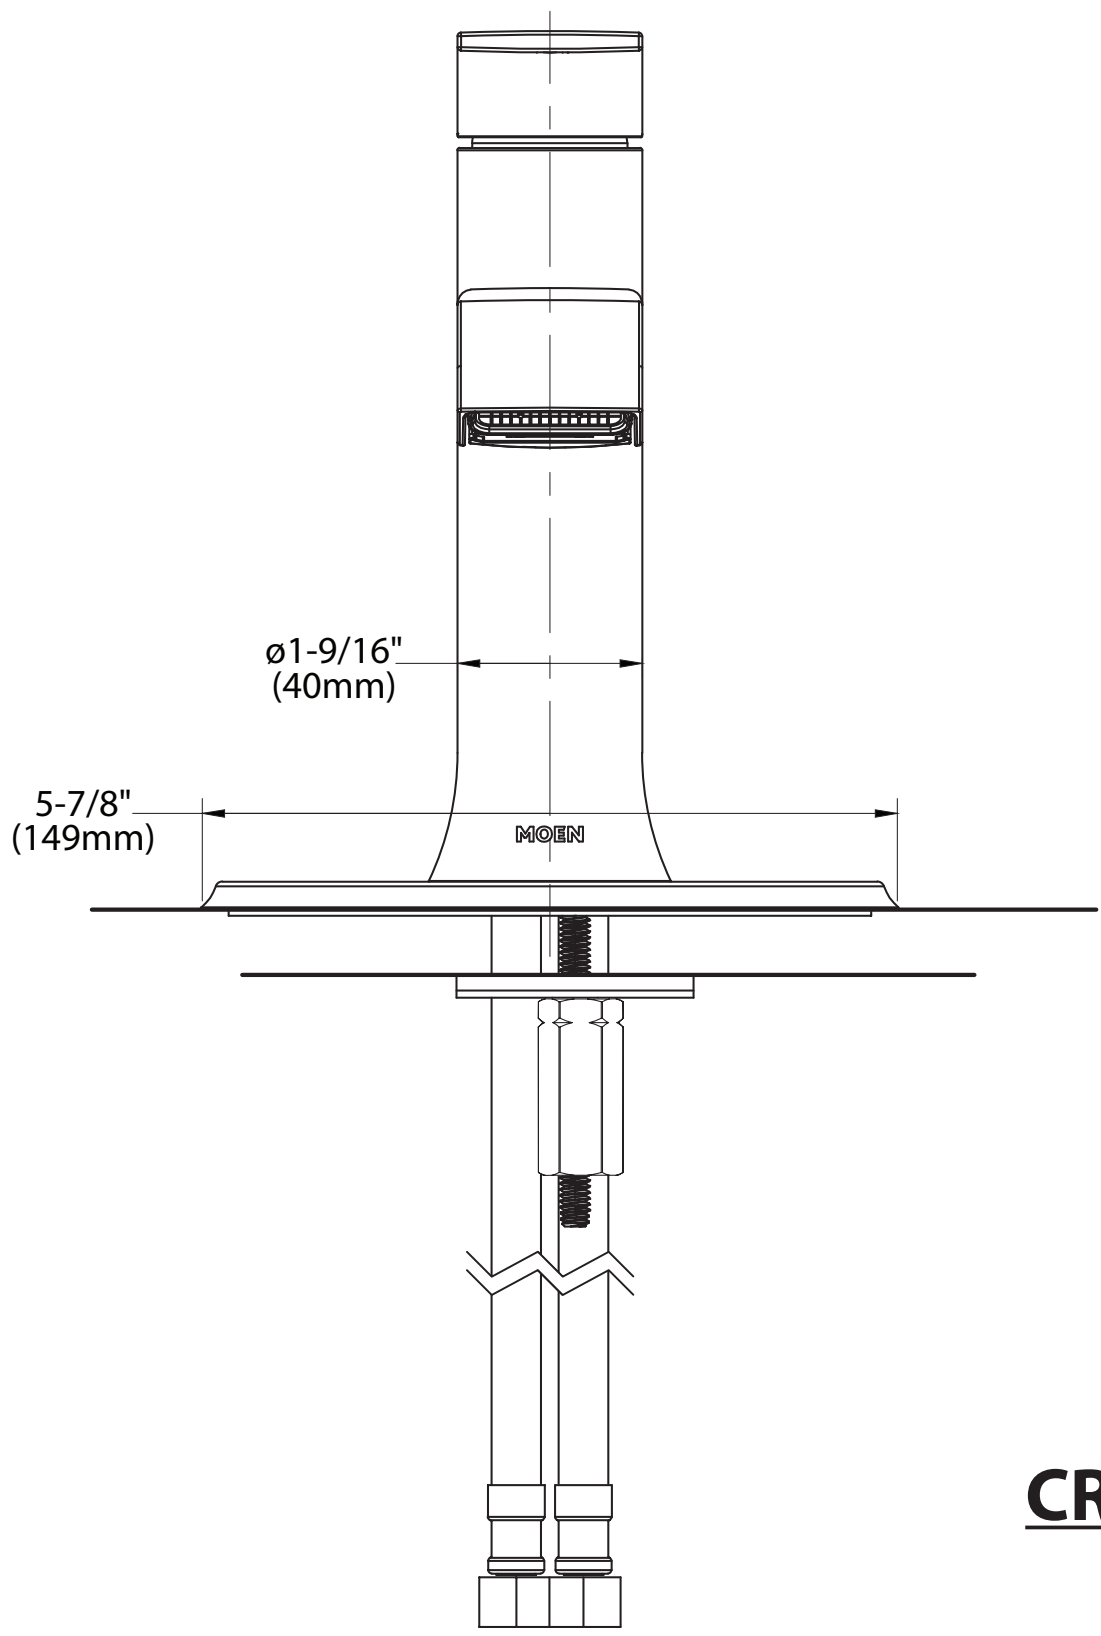

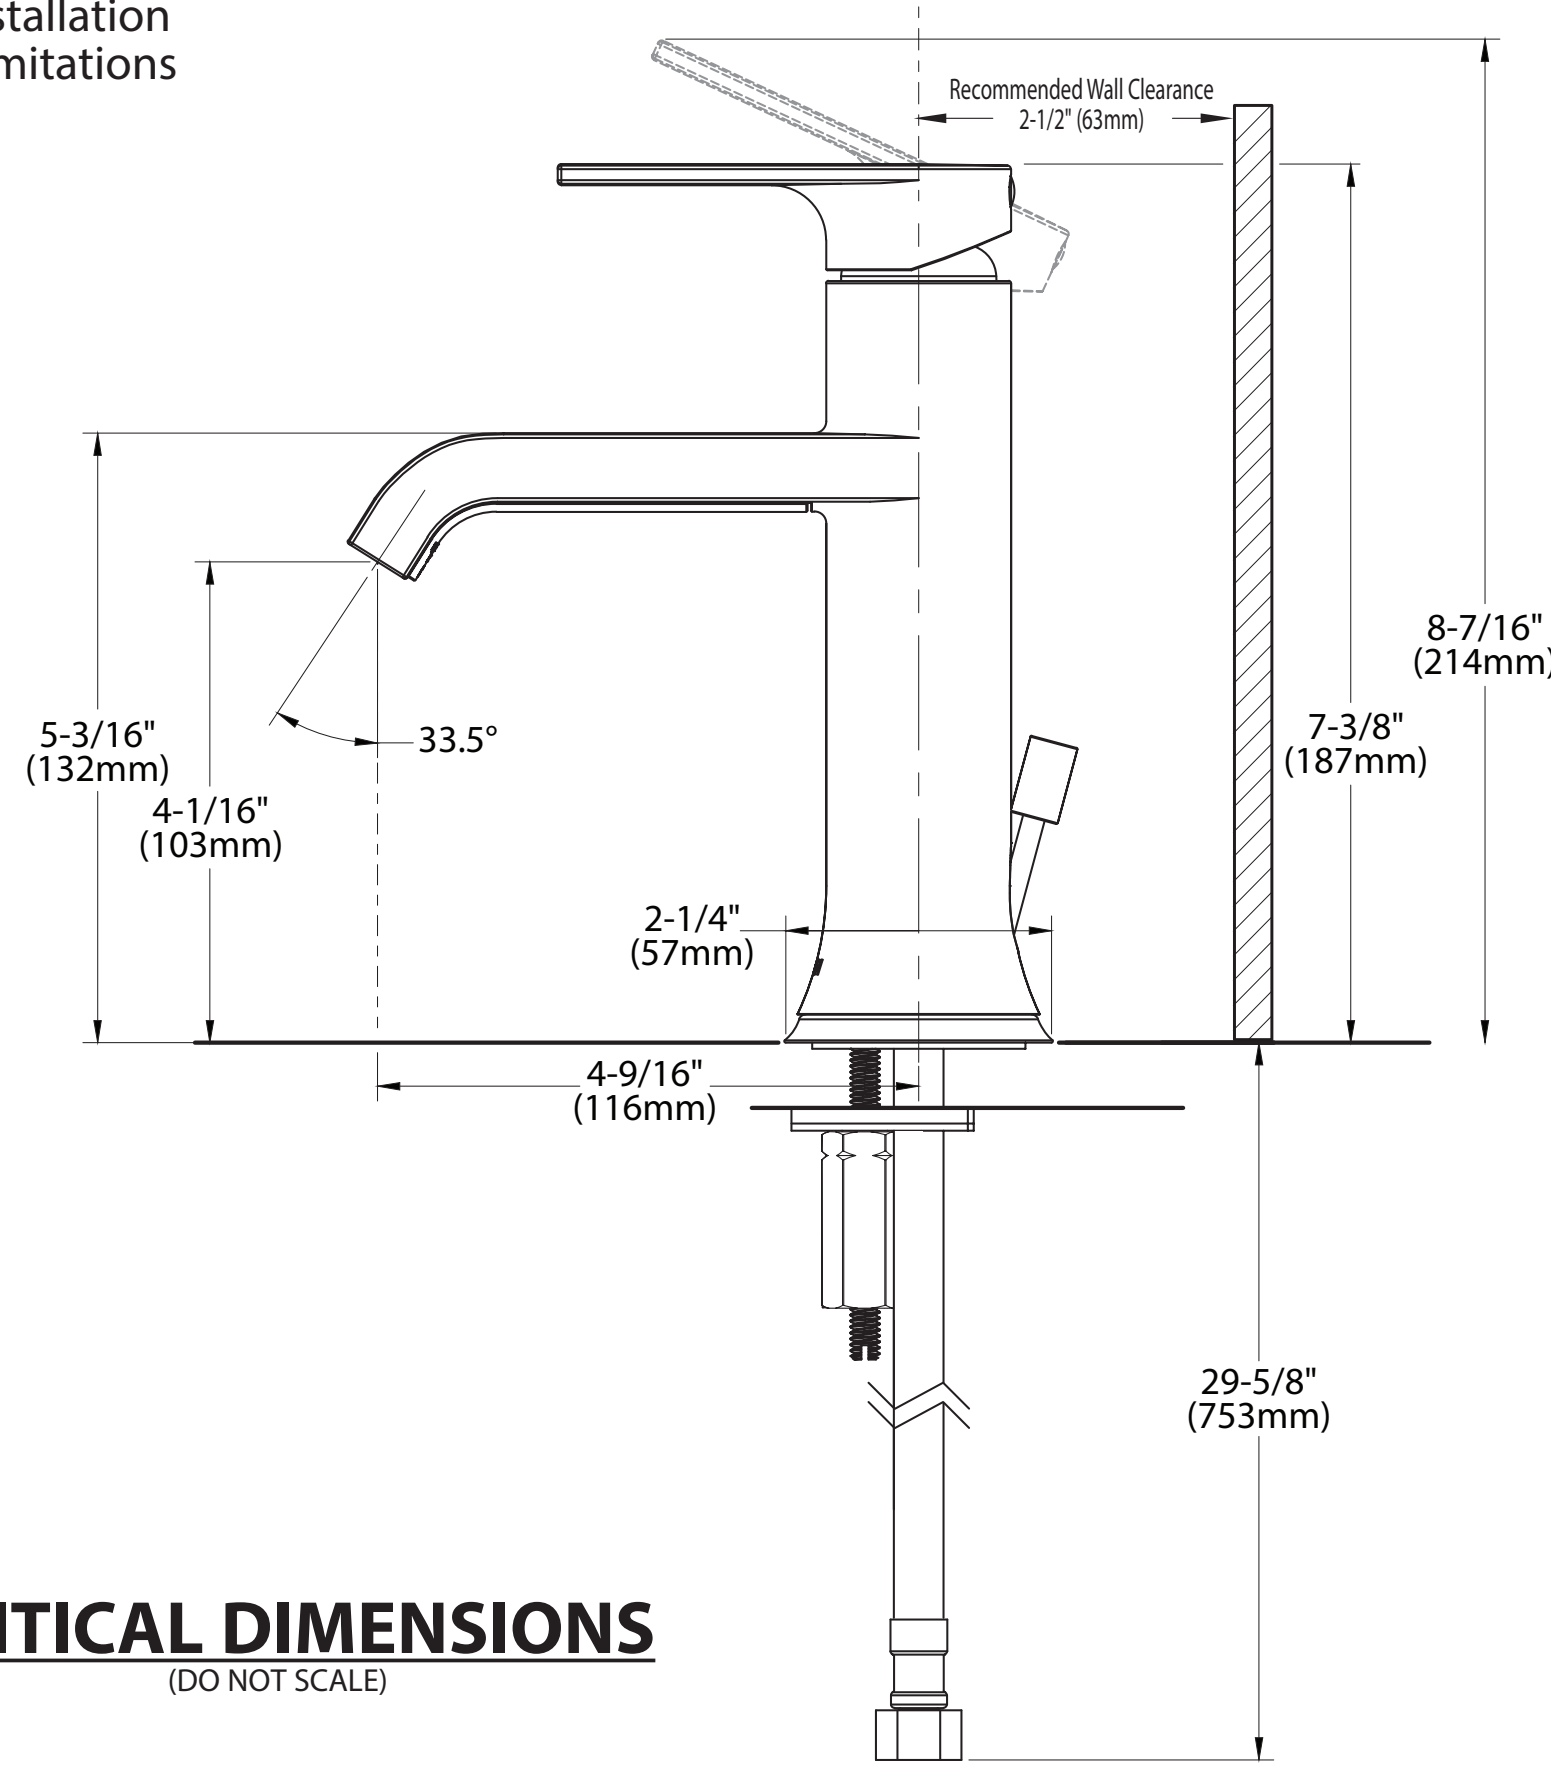

CRITICAL DIMENSIONS
(DO NOT SCALE)

MOEN®

Specifications



DESCRIPTION
- Metal construction with various finishes identified by suffix
- Flexible supply lines with 3/8″ compression fittings
- Includes non-metalic pop-up waste assembly
- Includes optional 3 hole deck plate (escutcheon)

OPERATION
- Lever style handle
- Temperature controlled by 100˚ arc of handle travel

FLOW
- Water usage is limited to these maximum flow rates as indicated by the corresponding product markings
  º1.2 gpm max (4.5L/min) at 60 psi

CARTRIDGE
- 1255™ Duralast™ cartridge
- Nonmetallic/nonferrous and stainless steel material

STANDARDS
- Third party certified to WaterSense,® ASME A112.18.1/CSA B125.1, and all applicable requirements referenced therein
- Certified to NSF 61/9 & 372
- Products marked with 1.2 gpm are compliant with California water efficiency regulations
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- **ADA** ♿ for lever handle

WARRANTY
- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
- 10 year limited warranty when used in a multifamily installation
- 5 year limited warranty when used in a commercial installation

Visit www.moen.com/support for complete details and limitations

GENTA™
One-Handle Lavatory Faucet

Model: 84760
(includes deck plate)

NOTE: This faucet is designed to be installed through 1 or 3 - 1″ dia. holes, 2″ on center

WaterSense
Meets EPA Criteria
Certified by IAPMO R&T

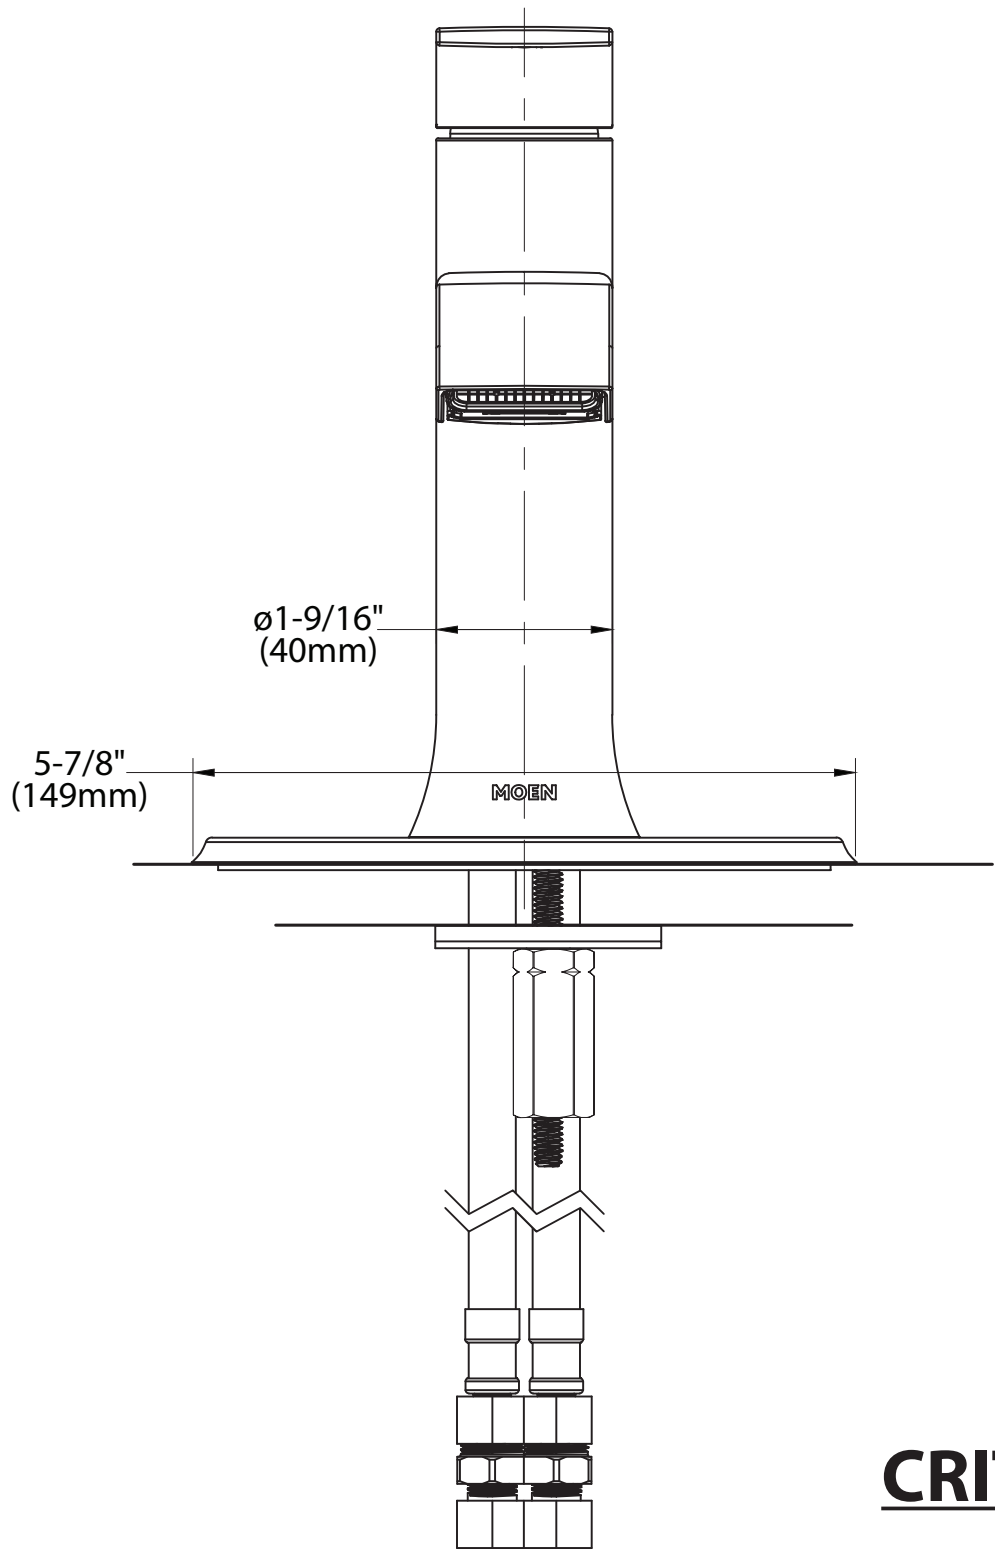

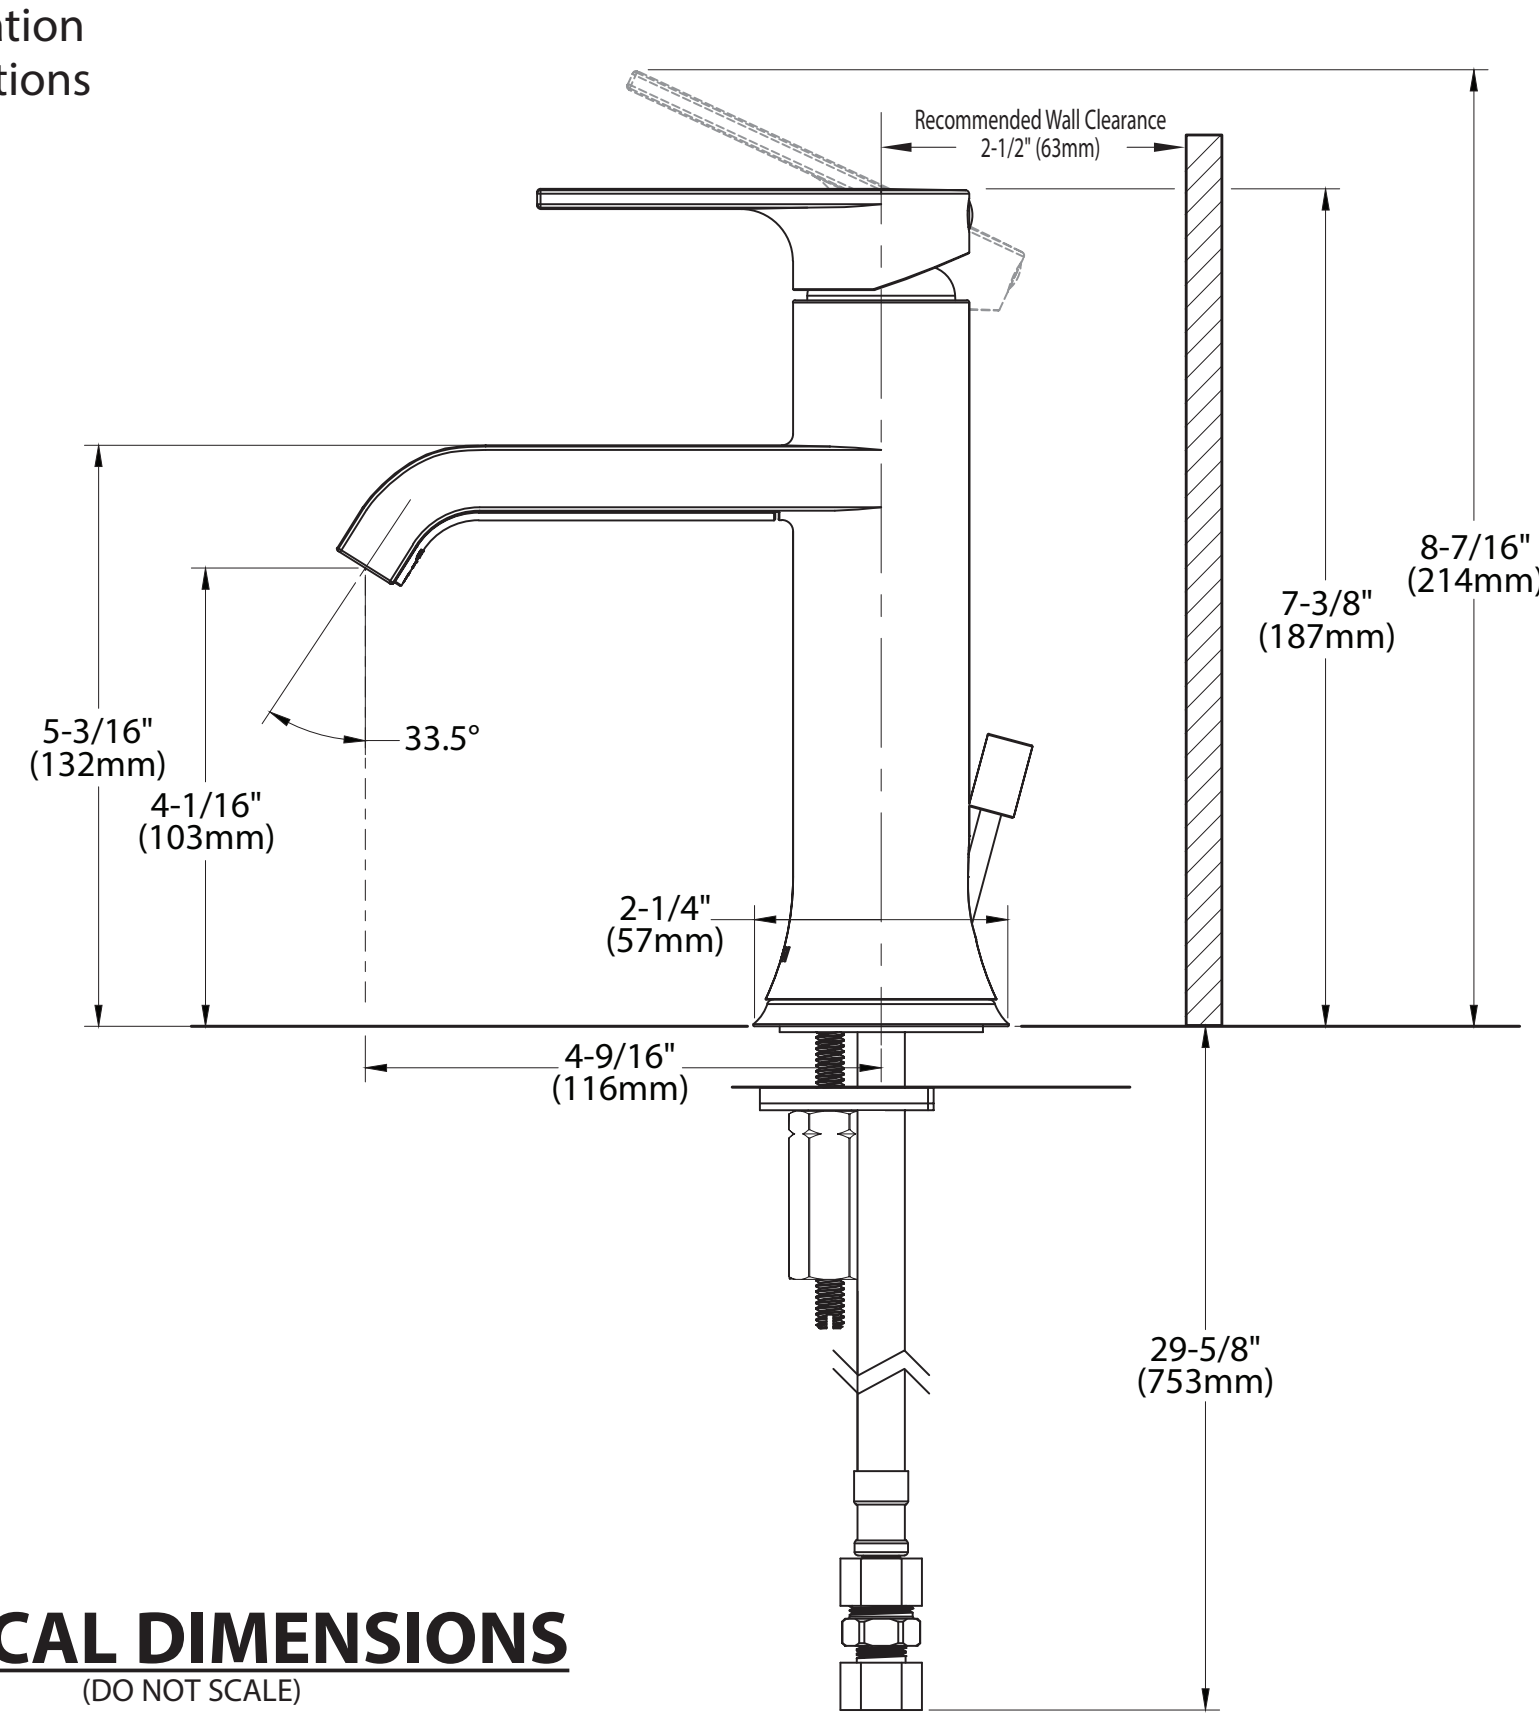

CRITICAL DIMENSIONS
(DO NOT SCALE)

Rev. 6/19

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN
www.moen.com

08/05/2019 SPC14575 500000388364
Released 03