

Specifications



TIFFIN™ **Two-Handle Lavatory Faucet**

Model: 84876 series

NOTE: THIS FAUCET IS DESIGNED TO BE INSTALLED THRU 3 HOLES, 1" MIN. DIA.



Metal construction with various finishes identified by suffix

- 1/2" IPS connections will accept standard ball nose connection for
- Includes pop-up waste assembly

OPERATION

DESCRIPTION

- Lever style handles
- Hot side counterclockwise to open (clockwise to close)
- Cold side clockwise to open (counter-clockwise to close)

FLOW

Aerator is limited to 1.5 gpm max (5.7 L/min)

CARTRIDGE

- 1224 cartridge design
- Nonmetallic and stainless steel material

STANDARDS


- Third party certified to meet ASME A112.18.1/CSA B125.1 and all applicable requirements referenced therein
- Contains no more than 0.25% weighted average lead content
- Certified to ANSI/NSF 61/9
- Complies with California Proposition 65 and with the Federal Safe **Drinking Water Act**
- ADA for lever handles

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations

NOTE

*Service kits available for thicker or thinner deck applications. See Parts view.

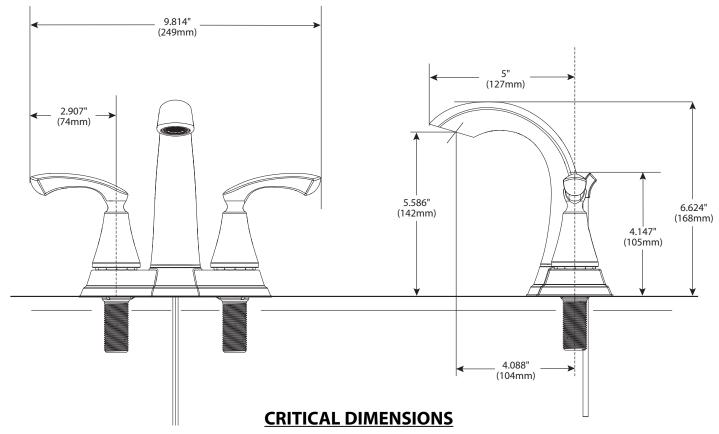

(DO NOT SCALE)

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN www.moen.com