



Buy it for looks. Buy it for life.®

# Specifications

## FAUCET DESCRIPTION

- Metal construction with various finishes identified by suffix
- 1/2" IPS connections
- Includes pop-up type waste assembly

## OPERATION

- Pivot action lever style handle
- Temperature controlled through 180° degree arc of handle travel


## FLOW

- Aerator is limited to 1.5 gpm (5.7 L/min)

## CARTRIDGE


- 1225 cartridge design
- Nonmetallic/nonferrous and stainless steel materials
- Can accommodate reverse piping and back to back installations

## STANDARDS

- Third party certified to meet CSA B-125.1, ASME A112.18.1, ICC A117.1 and all applicable requirements referenced therein
- Certified to ANSI/NSF 61/9
- Complies with California Proposition 65 and with the Federal Safe Water Drinking Act
- **ADA**  for lever handle

## WARRANTY


- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations

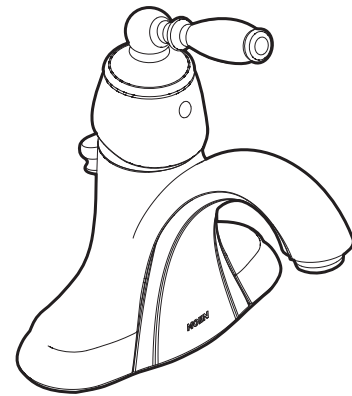

**LINDLEY™**  
**Single-Handle Lavatory Faucet**  
**with Plastic Waste Assembly**

**Model: 84916 series**

**NOTE:** THIS FAUCET IS DESIGNED TO BE INSTALLED  
THRU 3 – 1" DIA, HOLES, 4" ON CENTER

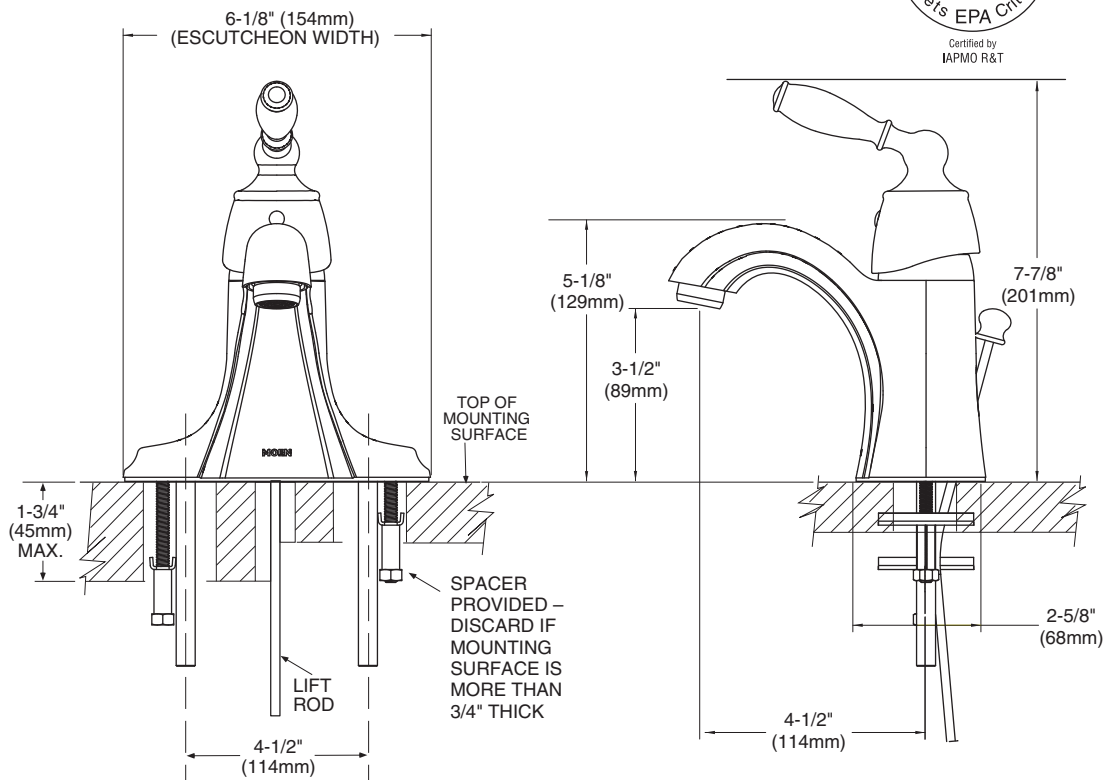

## CRITICAL DIMENSIONS

(DO NOT SCALE)

**TO ORDER PARTS CALL: 1-800-BUY-MOEN**

**www.moen.com**