

DESCRIPTION

- Power Boost™ Spray Technology
- Reflex™ pulldown system offers smooth operation, easy movement and secure docking
- Metal construction with Spot Resist Stainless finish
- Duralock™ quick connect system
- Pulldown spray with 68" braided hose
- Flexible supply lines with 3/8" compression fittings
- High arc spout provides height and reach to fill or clean large pots while pulldown wand provides the maneuverability for cleaning or rinsing
- 360° rotating spout

OPERATION

- Lever style handle
- Temperature controlled by 100° arc of handle travel
- Operates with less than 5 lbs. of force
- Operates in stream or spray mode in the docked or retracted position

FLOW

- Flow is limited to 1.5 gpm (5.7 L/min) at 60 psi

CARTRIDGE

- 1255™ Duralast™ cartridge for Single-Handle Faucets

STANDARDS

- Third party certified to IAPMO Green, ASME A112.18.1/CSA B-125.1 and all applicable requirements referenced therein including NSF 61/9 & 372
- Meets CalGreen and Georgia SB370 requirements
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- ADA for lever handle
- The backflow protection system in this device consists of two independently operating check valves, a primary and a secondary which prevent backflow

WARRANTY

- Lifetime limited warranty against material or manufacturing defects to the original homeowner
- 10 year limited warranty when used in a multifamily installation
- 5 year limited warranty when used in a commercial installation




Fenn™

Single Handle Pulldown Kitchen Faucet

MODELS: 87163SR5

NOTE: THIS FAUCET IS DESIGNED TO BE INSTALLED THROUGH 1, 2, 3 AND 4 HOLE, 1-1/2" (38mm) MIN. DIA. (1 HOLE FOR SOAP DISPENSER)

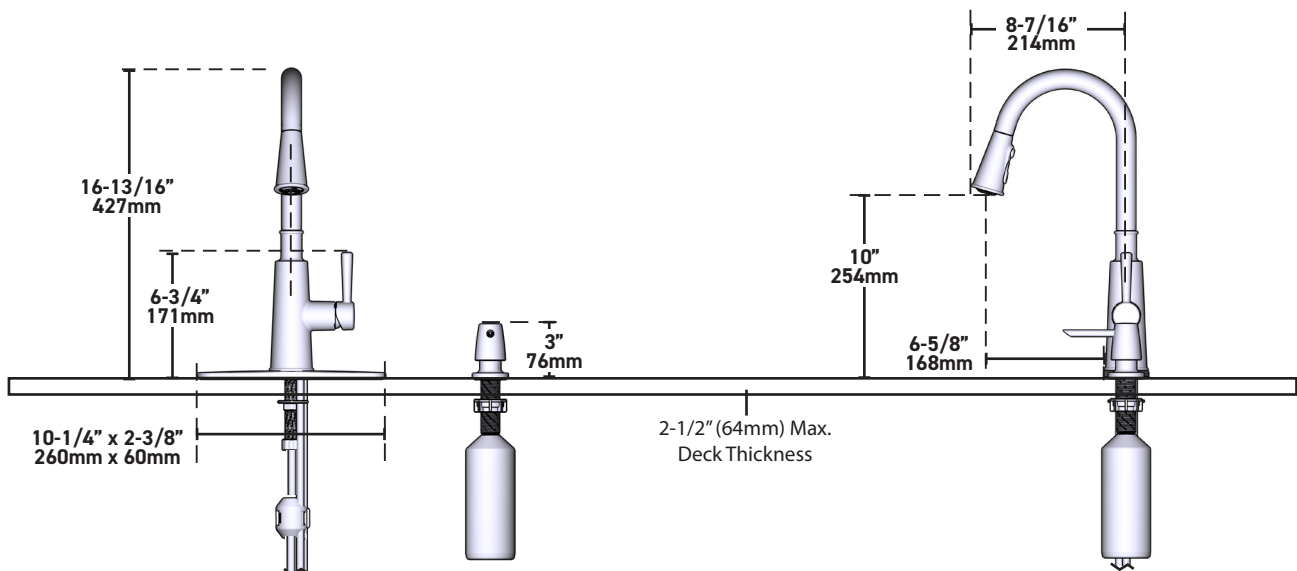

CRITICAL DIMENSIONS DO NOT SCALE