

FAUCET DESCRIPTION

- Metal construction with various finishes identified by suffix
- High arc spout provides the height and reach to fill or clean large pots
- Single hole mounting
- Flexible supply lines with 3/8" compression fittings
- 360° rotating spout
- With and without side spray versions available
- Duralock™ Quick Connect Installation
- Includes hose and Protégé side spray

OPERATION

- Single handle lever
- Temperature controlled by 100° arc of handle travel

FLOW

- Aerator is limited to 1.5 gpm max (5.7 L/min)

CARTRIDGE

- 1255™ Duralast™ cartridge
- Engineered polymers, non-ferrous and stainless steel materials


STANDARDS

- Third party certified to ASME A112.18.1/CSA B125.1 and all applicable requirements referenced therein including NSF 61/9 & 372
- Meets CalGreen and Georgia SB370 requirements
- Contains no more than 0.25% weighted average lead content
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act

- ADA  for lever handle

WARRANTY


- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
 - 10 year limited warranty when used in a multifamily installation
 - 5 year limited warranty when used in a commercial installation
- Visit www.moen.com/support for complete details and limitations

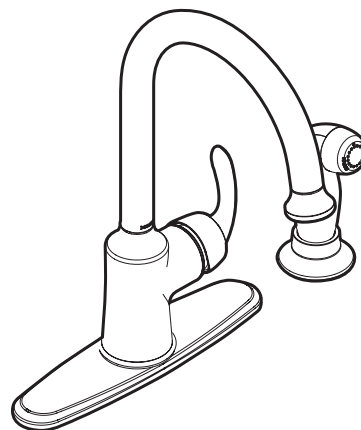

Bayhill™
Single-Handle Single-Hole Mount
High Arc Kitchen Faucet

Models: 87301 series

NOTE: THIS FAUCET IS DESIGNED TO BE INSTALLED THROUGH 2 OR 4 HOLES: A 1-1/2" (38MM) MIN. DIA. HOLE FOR VALVE AND A 1-1/4" (32MM) MIN. DIA. HOLE FOR SIDE SPRAY. HOLES ON 4" OR 8" CENTERS.

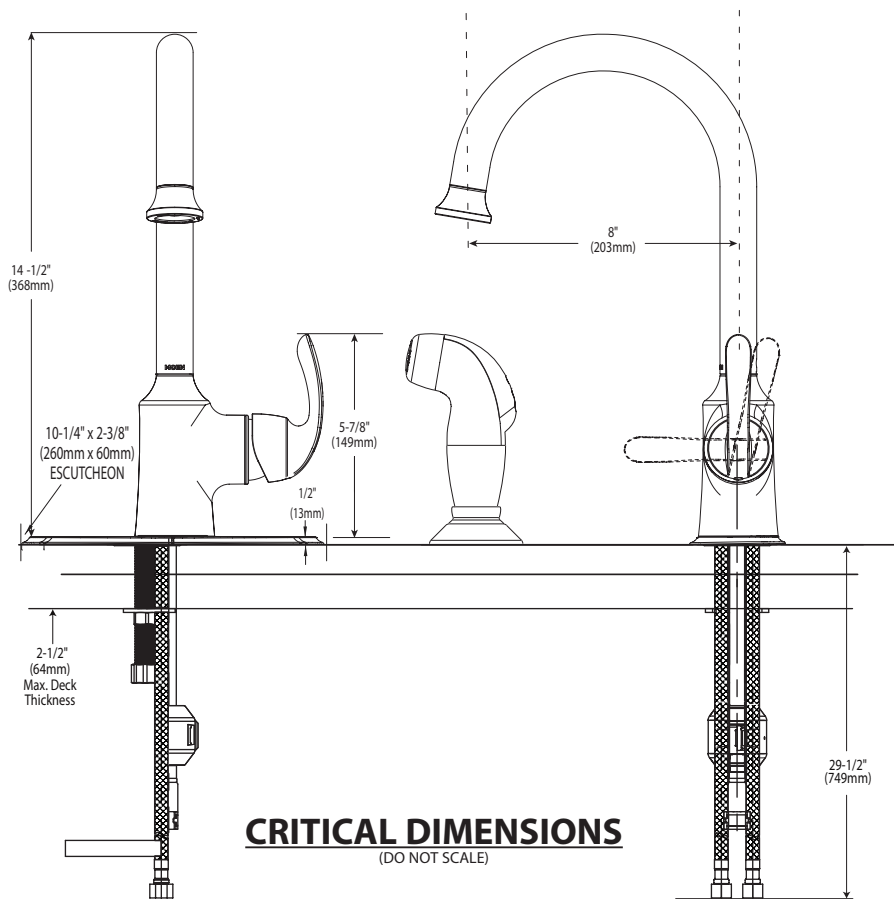

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN

www.moen.com