

### Buy it for looks. Buy it for life.®

There is more than 1 version of this model.

Page down to identify the version you have.

### DESCRIPTION

- Versatile, hands-free convenience in the kitchen
- Allows users to control the faucet in 3 unique ways: Wave Sensor, Ready Sensor and familiar handle
- Powered by 6 AA batteries or optional AC adapter with power splitter Reflex\* pulldown system offers smooth operation, easy movement and secure docking Metal construction with various finishes identified by suffix Duralock\* quick connect installation

- Dullabous quite Collect installation Pulldown spray with 68" braided hose Valve flexible supply lines with 3/8" compression fittings Spout uses push-fit hose connections High arc spout provides height and reach to fill or clean large
  - pots while pull down wand provides the maneuverability for cleaning or rinsing Includes liquid soap dispenser

### OPERATION

- Temperature controlled by 100° arc of handle travel
- Operates with less than 5 lbs. of force
- Operates in stream or spray mode in the pulldown or retracted position
- Spout rotates 100 degrees

  When filling a vessel outside the sink, the pause feature conveniently stops the flow of water as the wand passes over the counter top

- Flow is limited to 1.5 gpm (5.7 L/min) at 60 psi Operates in eco-performance mode by default in aerated and spray stream • Operates i

- 1255™ Duralast™ cartridge for Single-Handle Faucets
- Engineered polymers, non-ferrous and stainless steel materials

- Third party certified to ASME A112.18.1/CSA B125.1 and all applicable requirements referenced therein including NSF 61 & 372
  Meets Georgia SB370 requirements

- Contains no more than 0.25% weighted average lead content Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- The backflow protection system in the device consists of two independently operating check valves, a primary and a secondary which prevent backflow
- ADA for lever handle

### WARRANTY

- Limited lifetime warranty against leaks, drips, finish defects to the original consumer purchaser 5 year warranty electronic operation defects to the original consumer purchaser 5 year warranty against leaks, drips, finish defects if used in commercial installations 1 year warranty against electronic operation defects if used in commercial installations

# Specifications



### **Delaney™ with MOTIONSENSE™ Single-Handle High Arc Pulldown Kitchen Faucet**


Models: 87359E SERIES

**NOTE:** THIS FAUCET IS DESIGNED TO BE INSTALLED THRU 1 OR 3 HOLES, 1-1/2" (38mm) MIN. DIA.







# **Close up view of Control Box**



# **Battery Holder**



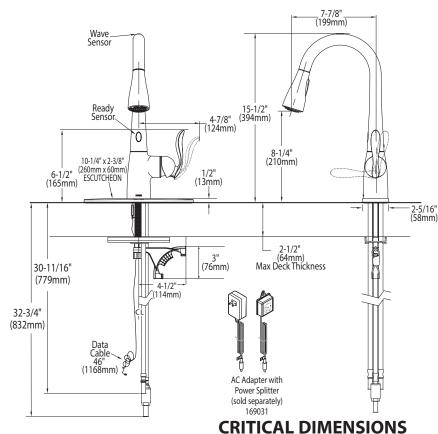

(DO NOT SCALE)



## Buy it for looks. Buy it for life.®

- Versatile, hands-free convenience in the kitchen
- Allows users to control the faucet in 3 unique ways: Wave Sensor, Ready Sensor and familiar handle Powered by 6 AA batteries or optional AC adapter with power splitter
- Reflex™ pulldown system offers smooth operation, easy movement and secure docking
- Metal construction with various finishes identified by suffix
- Hydrolock® quick connect installation

- Pulldown spray with 68" braided hose
  Valve flexible supply lines with 3/8" compression fittings
  Spout uses push-fit hose connections
  High arc spout provides height and reach to fill or clean large
  pots while pull down wand provides the maneuverability for cleaning or rinsing
- Includes liquid soap dispenser OPERATION

- Lever style handle

- Temperature controlled by 100° arc of handle travel
  Operates with less than 5 lbs. of force
  Operates in stream or spray mode in the pulldown or retracted position
- Spout rotates 100 degrees When filling a vessel outside the sink, the pause feature conveniently stops the flow of water as the wand passes over the counter top

- Flow is limited to 1.5 gpm (5.7 L/min) at 60 psi
   Operates in eco-performance mode by default in aerated and spray stream CARTRIDGE

- 1255™ Duralast™ cartridge for Single-Handle Faucets Engineered polymers, non-ferrous and stainless steel materials

### STANDARDS

- Third party certified to ASME A112.18.1/CSA B125.1 and all applicable requirements referenced therein including NSF 61 & 372
  Meets Georgia SB370 requirements

- Contains no more than 0.25% weighted average lead content Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- The backflow protection system in the device consists of two independently operating check valves, a primary and a secondary which prevent backflow
- ADA E for lever handle

### WARRANTY

- Limited lifetime warranty against leaks, drips, finish defects to the original consumer purchaser
- 5 year warranty electronic operation defects to the original consumer purchaser 5 year warranty against leaks, drips, finish defects if used in commercial installations
- year warranty against electronic operation defects if used in commercial installations

# Specifications




### **Delaney™ with MOTIONSENSE™** Single-Handle High Arc Pulldown Kitchen Faucet

Models: 87359E SERIES


**NOTE:** THIS FAUCET IS DESIGNED TO BE INSTALLED THRU 1 OR 3 HOLES, 1-1/2" (38mm) MIN. DIA.






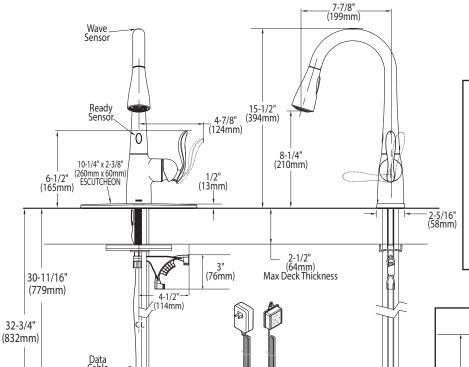

# **Close up view of Control Box**



# **Battery Holder**



**CRITICAL DIMENSIONS** (DO NOT SCALE)

AC Adapter with **Power Splitter** (sold separately)

> TO ORDER PARTS CALL: 1-800-BUY-MOEN www.moen.com