



Buy it for looks. Buy it for life.®

*There is more than 1 version of this model.
Page down to identify the version you have.*

DESCRIPTION

- Metal construction with various finishes identified by suffix
- Duralock™ Quick connect installation
- Pulldown spray with 68" braided hose
- 3/8" compression connections will accept standard ball nose connection for 3/8" tubing
- High arc spout provides height and reach to fill or clean large pots while the pulldown wand provides the maneuverability for cleaning or rinsing

OPERATION

- Lever style handle
- Operates with less than 5 lbs. of force
- Operates in stream or spray mode in the pulldown or retracted position

FLOW

- Flow is limited to 1.5 gpm max (5.7L/min) at 60 psi,

CARTRIDGE

- 1255™ Duralast™ cartridge for Single-Handle Faucets
- Engineered polymers, non-ferrous and stainless steel materials

STANDARDS


- Designed and manufactured to comply with the requirements of: ASME A112.18.1/CSA B-125.1, NSF 61 Section 9, California Proposition 65
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- ADA ♿ for lever handles
- The backflow protection system in this device consists of two independently operating check valves, a primary and a secondary which prevent backflow

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
- 10 year limited warranty when used in a multifamily installation
- 5 year limited warranty when used in a commercial installation

Visit www.moen.com/support for complete details and limitations


Specifications



Harlon™
Single Handle High Arc Pull Out Kitchen Faucet

Model: 87499 series

NOTE: THIS FAUCET IS DESIGNED TO BE INSTALLED THROUGH 1, 3 or 4 HOLES, 1-1/2" (38mm) MIN. DIA.

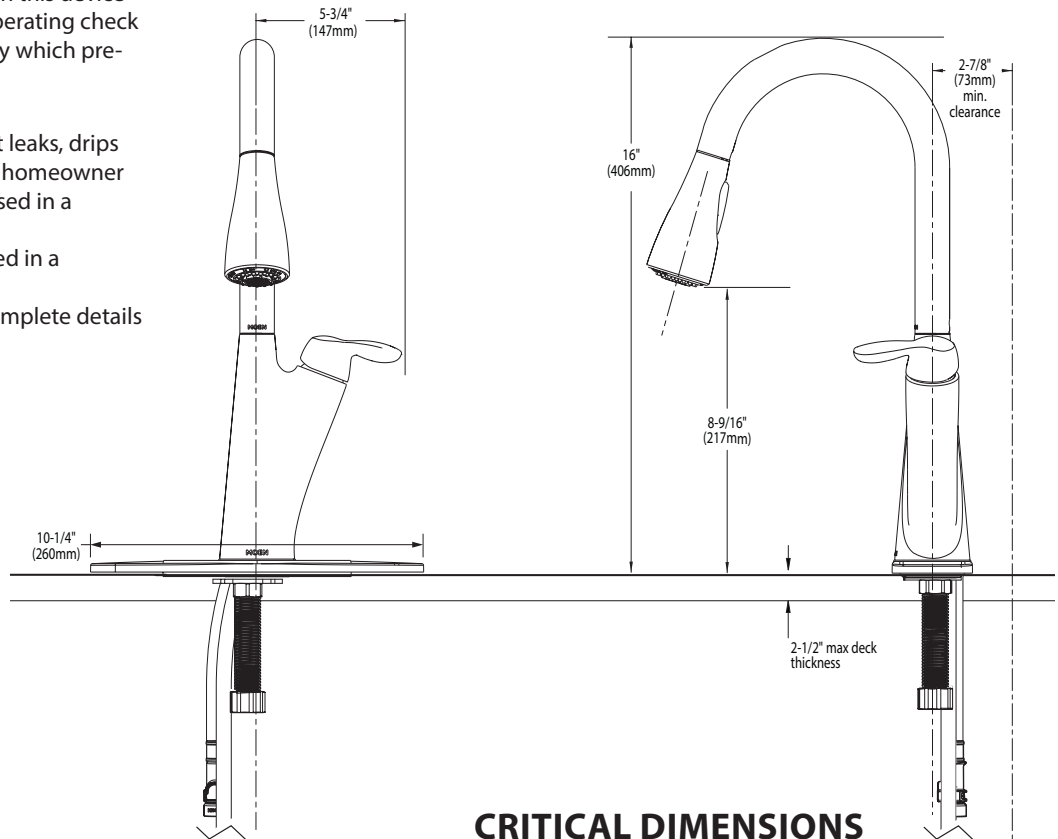

CRITICAL DIMENSIONS

(DO NOT SCALE)



Buy it for looks. Buy it for life.®

Specifications

DESCRIPTION

- Metal construction with various finishes identified by suffix
- Duralock™ Quick connect installation
- Pulldown spray with 68" braided hose
- 3/8" compression connections will accept standard ball nose connection for 3/8" tubing
- High arc spout provides height and reach to fill or clean large pots while the pulldown wand provides the maneuverability for cleaning or rinsing

OPERATION

- Lever style handle
- Operates with less than 5 lbs. of force
- Operates in stream or spray mode in the pulldown or retracted position

FLOW

- Flow is limited to 1.5 gpm max (5.7L/min) at 60 psi,

CARTRIDGE

- 1255™ Duralast™ cartridge for Single-Handle Faucets
- Engineered polymers, non-ferrous and stainless steel materials


STANDARDS

- Designed and manufactured to comply with the requirements of: ASME A112.18.1/CSA B-125.1, NSF 61 Section 9, California Proposition 65
- Contains no more than 0.25% weighted average lead content
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- ADA ♿ for lever handles
- The backflow protection system in this device consists of two independently operating check valves, a primary and a secondary which prevent backflow

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
- 10 year limited warranty when used in a multifamily installation
- 5 year limited warranty when used in a commercial installation


Visit www.moen.com/support for complete details and limitations



Harlon™
Single Handle High Arc Pull Out Kitchen Faucet

Model: 87499 series

NOTE: THIS FAUCET IS DESIGNED TO BE INSTALLED THROUGH 1, 3 or 4 HOLES, 1-1/2" (38mm) MIN. DIA. (1 HOLE FOR SOAP DISPENSER) (Model with soap dispenser effective prior to April 2016)

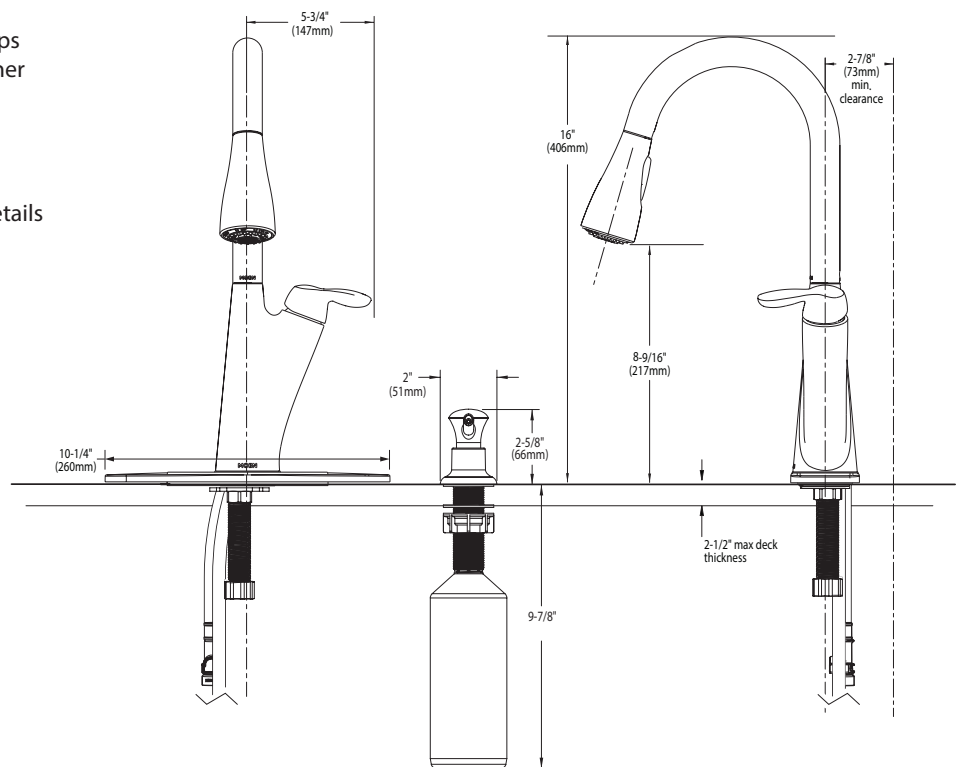

CRITICAL DIMENSIONS

(DO NOT SCALE)



Buy it for looks. Buy it for life.®

Specifications

DESCRIPTION

- Metal construction with various finishes identified by suffix
- Quick connect installation
- Pulldown spray with 68" braided hose
- 3/8" compression connections will accept standard ball nose connection for 3/8" tubing
- High arc spout provides height and reach to fill or clean large pots while the pulldown wand provides the maneuverability for cleaning or rinsing

OPERATION

- Lever style handle
- Operates with less than 5 lbs. of force
- Operates in stream or spray mode in the pulldown or retracted position

FLOW

- Flow is limited to 1.5 gpm max (5.7L/min) at 60 psi,

CARTRIDGE

- 1255™ Duralast™ cartridge for Single-Handle Faucets
- Engineered polymers, non-ferrous and stainless steel materials


STANDARDS

- Designed and manufactured to comply with the requirements of: ASME A112.18.1/CSA B-125.1, NSF 61 Section 9, California Proposition 65
- Contains no more than 0.25% weighted average lead content
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- ADA ♿ for lever handles
- The backflow protection system in this device consists of two independently operating check valves, a primary and a secondary which prevent backflow

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
- 10 year limited warranty when used in a multifamily installation
- 5 year limited warranty when used in a commercial installation


Visit www.moen.com/support for complete details and limitations



Harlon™
Single Handle High Arc Pull Out Kitchen Faucet

Model: 87499 series

NOTE: THIS FAUCET IS DESIGNED TO BE INSTALLED THROUGH 1, 3 or 4 HOLES, 1-1/2" (38mm) MIN. DIA. (1 HOLE FOR SOAP DISPENSER) (Model with soap dispenser effective prior to April 2016)

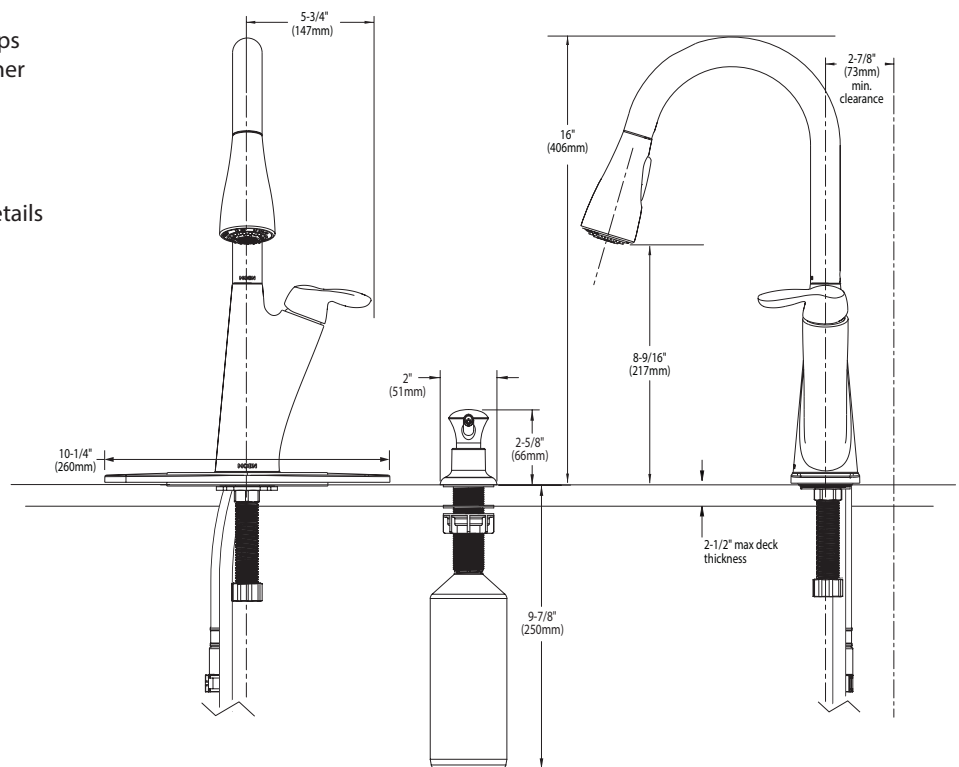

CRITICAL DIMENSIONS

(DO NOT SCALE)