



Buy it for looks. Buy it for life.®

Specifications

FAUCET DESCRIPTION

- Metal construction with various finishes identified by suffix
- 1/2" IPS connections will accept standard ball nose connection for 3/8" tubing
- Includes Protégé side spray and matching soap dispenser

OPERATION

- Lever style handle
- Temperature controlled by 130° arc of handle travel
- Will operate with less than 5 lbs. of force


FLOW

- Aerator is limited to 2.2 gpm (8.3 L/min).

CARTRIDGE


- 1225 cartridge design (not 1200)
- Nonmetallic, nonferrous and stainless steel material

STANDARDS

- Third party certified to meet: ASME A112.18.1/CSA B125.1, ICCI A117.1 and all applicable requirements referenced therein
- Certified to ANSI/NSF 61/9
- Complies with California Proposition 65 and with the Federal Safe Water Drinking Act
- **ADA**  for lever handle

WARRANTY


- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations

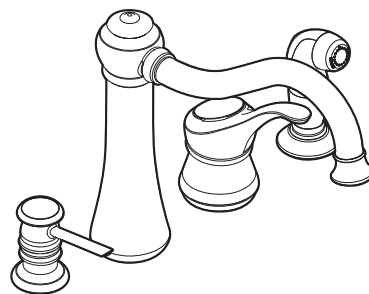

**Single-Handle Kitchen Faucet
with Protégé Side Spray
and Matching Soap Dispenser**

Models: 87770 series

**Spout, Handle, & Hose Spray install
through deck holes a minimum of
1-1/4" (32mm) in diameter.**

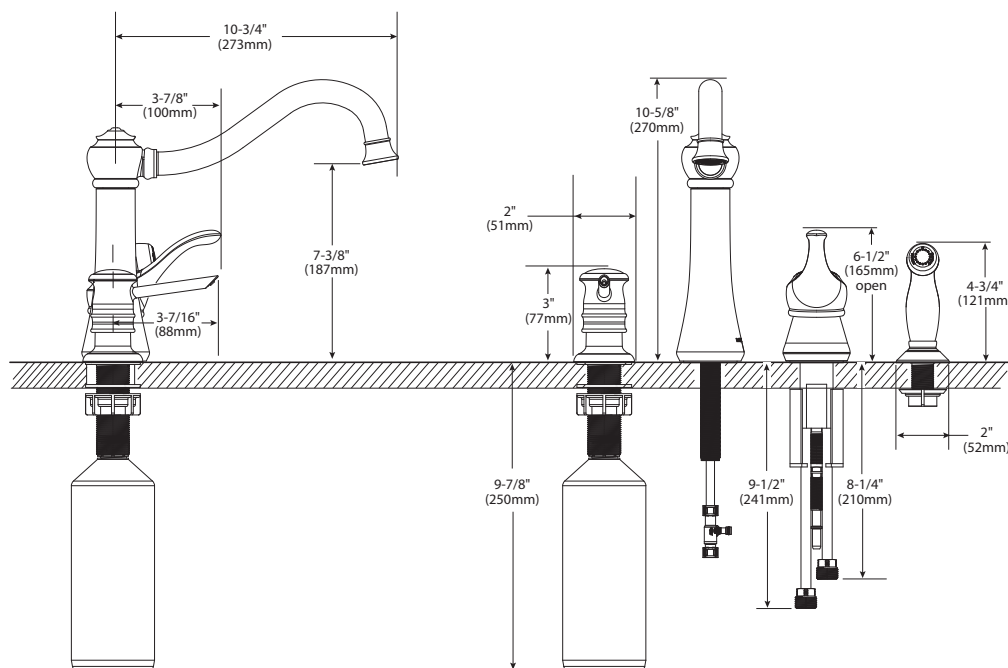

CRITICAL DIMENSIONS

(DO NOT SCALE)

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN

www.moen.com