



DESCRIPTION

- Metal construction with various finishes identified by suffix
- Duralock™ quick connect installation
- Pullout spray with 68" braided hose
- Flexible supply lines with 3/8" fittings connect directly to supply stop
- 360° rotating spout

OPERATION

- Lever style handle
- Operates with less than 5 lbs. of force
- Operates in stream or spray mode in the pullout or retracted position
- When filling a vessel outside the sink, the pause feature conveniently stops the flow of water as the wand passes over the counter top


FLOW

- Flow is limited to 1.5 gpm (5.7 L/min) at 60 psi

CARTRIDGE

- 1255™ Duralast™ cartridge for Single-Handle Faucets

STANDARDS

- Third party certified to ASME A112.18.1/CSA B-125.1, and all applicable requirements referenced therein including NSF 61/9
- Meets CalGreen and Georgia SB370 requirements
- Contains no more than 0.25% weighted average lead content
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- The backflow protection system in the device consists of two independently operating check valves, a primary and a secondary which prevent backflow
- **ADA**  for lever handle


WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations

Haysfield Single Handle High Arc Pullout Kitchen Faucet

Model: 87877 series

NOTE: THIS FAUCET IS DESIGNED TO BE INSTALLED THRU 1, 2, 3 and 4 HOLE, 1-1/2" (38mm) DIA.

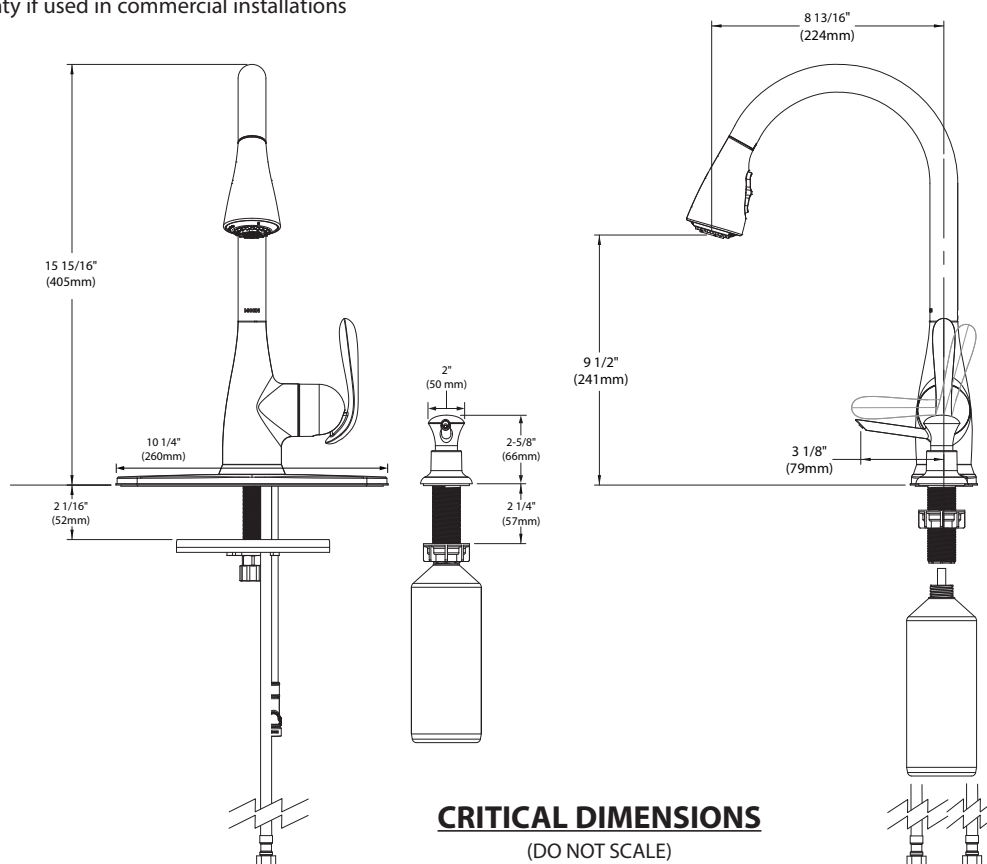

CRITICAL DIMENSIONS

(DO NOT SCALE)



- Metal construction with various finishes identified by suffix
- Quick connect installation
- Pullout spray with 68" braided hose
- Flexible supply lines with 3/8" fittings connect directly to supply stop
- 360° rotating spout

- Lever style handle
- Operates with less than 5 lbs. of force
- Operates in stream or spray mode in the pullout or retracted position
- When filling a vessel outside the sink, the pause feature conveniently stops the flow of water as the wand passes over the counter top

- Flow is limited to 1.5 gpm (5.7 L/min) at 60 psi

- 1255™ Duralast™ cartridge for Single-Handle Faucets

- Third party certified to ASME A112.18.1/CSA B-125.1, and all applicable requirements referenced therein including NSF 61/9
- Meets CalGreen and Georgia SB370 requirements
- Contains no more than 0.25% weighted average lead content
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- The backflow protection system in the device consists of two independently operating check valves, a primary and a secondary which prevent backflow

- **ADA**  for lever handle

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations

Model: 87877 series

NOTE: THIS FAUCET IS DESIGNED TO BE INSTALLED THRU 1 OR 3 HOLE, 1-1/2" (38mm) DIA.



(DO NOT SCALE)