



Buy it for looks. Buy it for life.®

Specifications

FAUCET DESCRIPTION

- High arc spout provides the height and reach to fill or clean large pots while the pulldown feature provides the infinite maneuverability for cleaning or rinsing
- Metal construction with various finishes identified by suffix
- Hydrolock® quick connect system
- Pulldown spray with 68" braided hose
- 1/2" IPS connections will accept standard ball nose connection for 3/8" tubing

OPERATION

- Two handle lever
- When filling a vessel outside of the sink, the pause feature conveniently stops the flow of water as the wand passes over the countertop
- Convenient single-button actuation provides flexibility to switch from stream to spray mode

FLOW


- Flow is limited to 2.2 gpm (8.3 L/min) at 60 psi

CARTRIDGE

- 1224 cartridge design
- Engineered polymers, non-ferrous and stainless steel materials


STANDARDS

- Third party certified to CSA B-125.1, ASME A112.18.1 and all applicable requirements therein including NSF61/9
- Contains no more than 0.25% weighted average lead content
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- The backflow protection system in this device consists of two independently operating check valves, a primary and a secondary which prevent backflow.

- **ADA**  for lever handles

WARRANTY


- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations

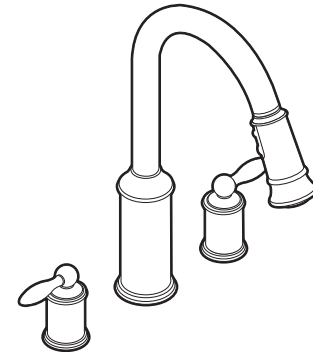

Aberdeen™ Two Handle High Arc Pull Down Kitchen Faucet

Models: CA7592 series

NOTE: DESIGNED TO INSTALL
THRU 3 HOLES 1-1/4" (32mm) MIN. DIA.

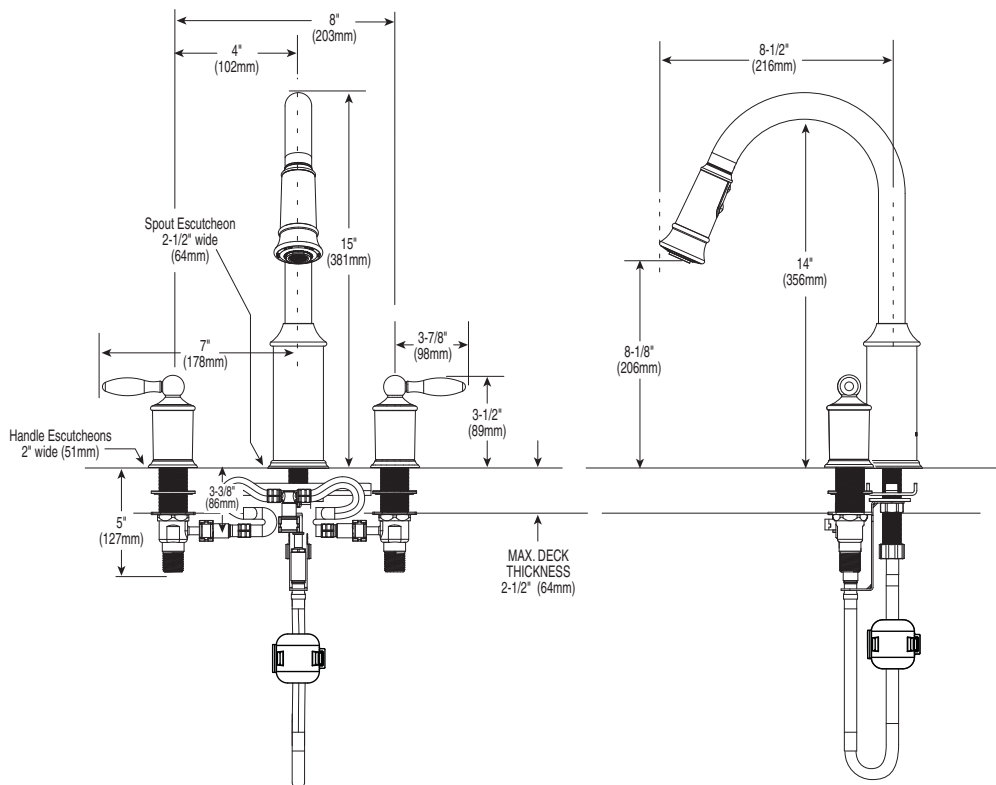

CRITICAL DIMENSIONS

(DO NOT SCALE)

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN

Rev. 8/09

Hydrolock® is a registered trademark of COOPER STANDARD AUTOMOTIVE INC.

www.moen.com