

## FAUCET DESCRIPTION

- Brass construction with chrome plated finish
- 4" centerset
- 1/2" IPS connections
- Vandal resistant torx head screws
- Vandal resistant aerator

## OPERATION

- Lever style handles with hot and cold color indicators

## FLOW

- Aerator is limited to 2.2 gpm max. (8.3 L/min)
- Aerator is limited to .5 gpm max. for model # CA8211

## CARTRIDGE


- Brass shell, ceramic disc cartridge
- 1/4 turn operation

## STANDARDS

- Third party certified to ASME A112.18.1/CSA B-125.1 and all applicable specifications referenced therein
- Contains no more than 0.25% weighted average lead content
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- ADA  for lever handles

## WARRANTY

- Warranted for five years against material or manufacturing defects

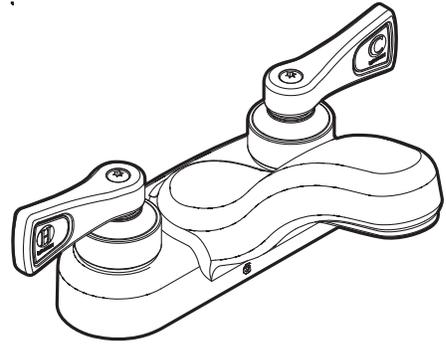


## Two-Handle Lavatory Faucet

**Models:** CA8210, CA8211, CA8218\*

\*CA8218 uses 14750 grid strainer



**NOTE:** Designed to be installed through 2 holes - 1" min. dia.

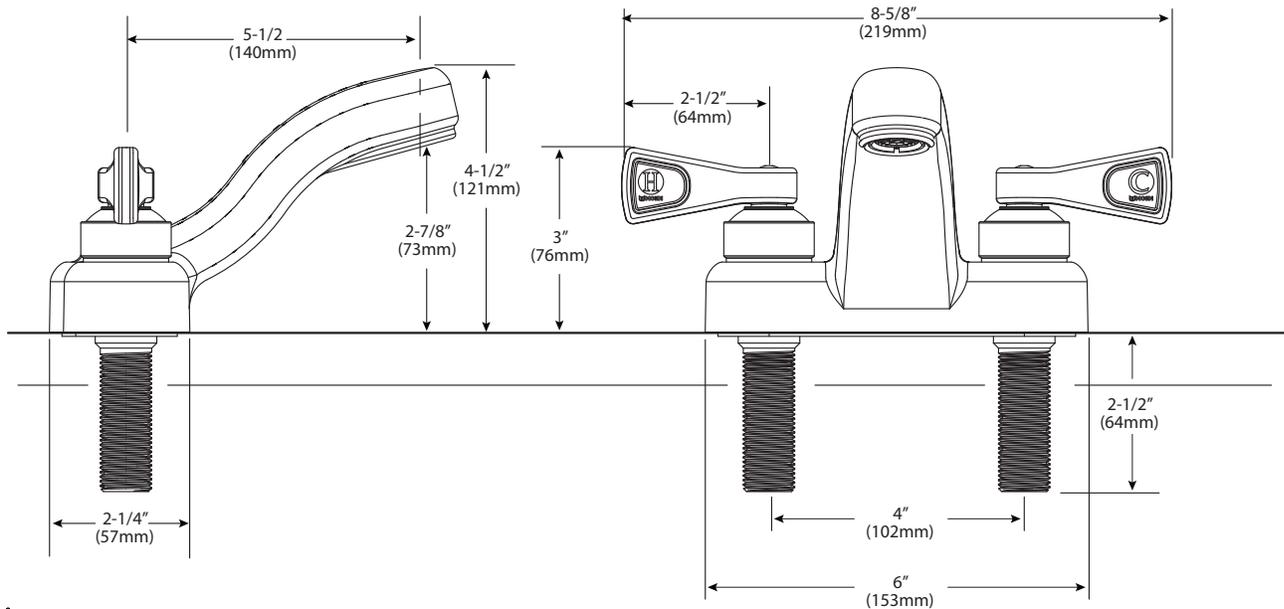

## CRITICAL DIMENSIONS

(DO NOT SCALE)