

FAUCET DESCRIPTION

- Solid brass construction
- Various finishes identified by suffix
- 3/8" compression x 15" stainless steel supply lines

OPERATION

- Lever style handle
- Temperature controlled by 110° arc of handle travel


FLOW

- Flow is limited to 1.5 gpm max (5.7L/min) at 60 psi

CARTRIDGE


- Ceramic disc cartridge with temperature limit stop
- Nonmetallic/nonferrous and ceramic material

STANDARDS

- Third party certified to meet WaterSense,[®] CSA B-125.1, ASME A112.18.1, ICC A117.1 and all applicable requirements referenced therein
- Contains no more than 0.25% weighted average lead content
- Certified to ANSI/NSF 61/9
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- **ADA**  for lever handle

WARRANTY

- Warranted for 5 years against materials or manufacturing defects

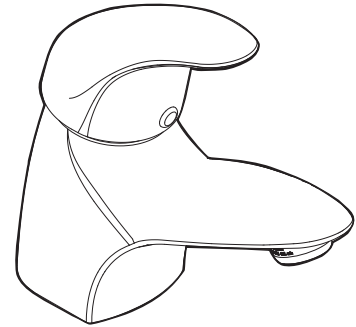

Single-Handle Lavatory Faucet With Metal Drain Assembly

Models: CA8419 series

NOTE: DESIGNED TO BE INSTALLED THROUGH 1 HOLE 1-3/8" MIN. DIA.

