



Buy it for looks. Buy it for life.®

Specifications

FAUCET DESCRIPTION

- Pullout faucet spout provides infinite maneuverability for cleaning or rinsing
- Metal construction with classic stainless finish
- Hydrolock® quick connect installation
- Pullout spray with 59" braided hose
- 1/2" IPS connections will accept standard ball nose connection for 3/8" tubing

OPERATION

- Single handle lever
- Convenient single-button actuation provides flexibility to switch from stream to spray mode
- Temperature controlled by 120° arc of handle travel
- Spout receptor rotation is 120°
- Operates with less than 5 lbs. of force

FLOW

- Maximum flow is limited to 1.5 gpm (5.7 L/min) at 60 psi

CARTRIDGE

- Ceramic disc technology
- Engineered polymers and ceramic materials


STANDARDS

- Third party certified to IAPMO Green ASME A112.18.1/CSA B-125.1 and all applicable requirements referenced therein including NSF 61/9
- Meets CalGreen and Georgia SB370 requirements
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- The backflow protection system in this device consists of two independently operating check valves, a primary and a secondary which prevent backflow.

- **ADA**  for lever handle

WARRANTY


- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations

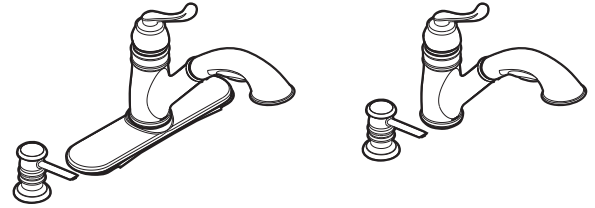

Single Control Pull-Out Kitchen Faucet

Models: CA87007series

NOTE: DESIGNED TO INSTALL THROUGH 1 OR 3 HOLES 1-1/2" (38mm) DIA.

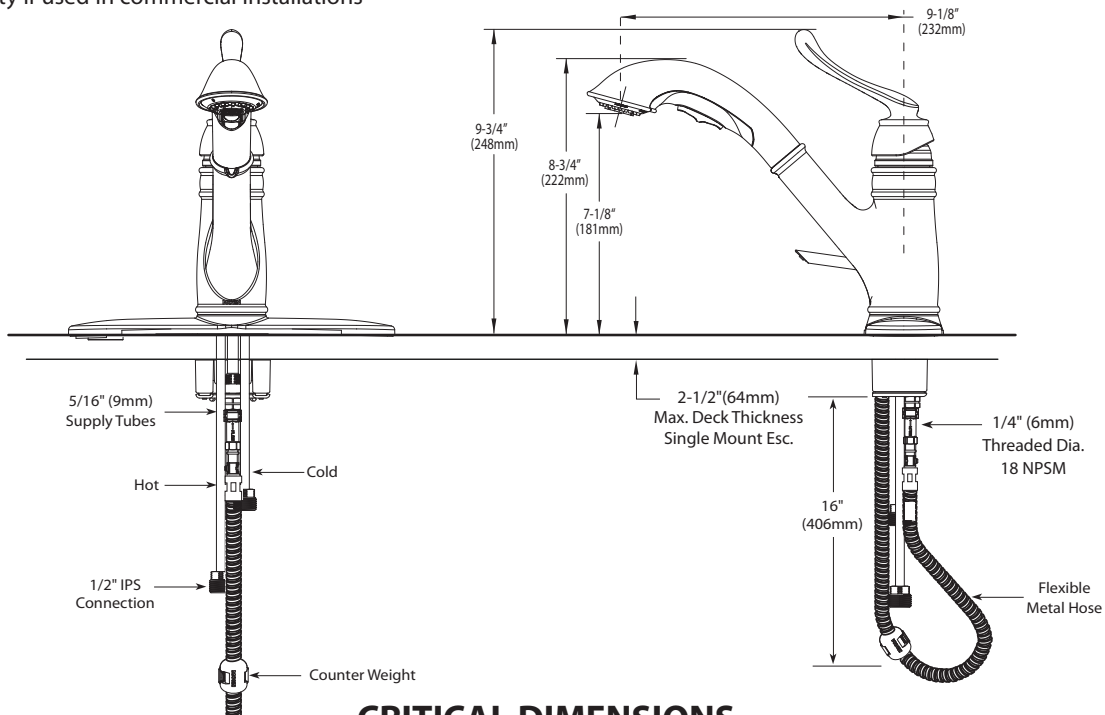

CRITICAL DIMENSIONS

(DO NOT SCALE)

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN

www.moen.com