



Buy it for looks. Buy it for life.®

# Specifications

## FAUCET DESCRIPTION

- Pullout faucet spout provides infinite maneuverability for cleaning or rinsing
- Metal construction with various finishes identified by suffix
- Hydrolock® quick connect installation
- Pullout spray with 59" braided hose
- 1/2" IPS connections will accept standard ball nose connection for 3/8" tubing

## OPERATION

- Single handle lever
- Convenient single-button actuation provides flexibility to switch from stream to spray mode
- Temperature controlled by 120° arc of handle travel
- Spout receptor rotation is 120°
- Operates with less than 5 lbs. of force

## FLOW

- Maximum flow is limited to 2.2 gpm (8.3 L/min) at 60 psi

## CARTRIDGE

- Ceramic disc technology
- Engineered polymers and ceramic materials


## STANDARDS

- Third party certified to ASME A112.18.1/CSA B-125.1, and all applicable requirements referenced therein including NSF 61/9
- Contains no more than 0.25% weighted average lead content
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- The backflow protection system in the device consists of two independently operating check valves, a primary and a secondary which prevent backflow

- **ADA**  for lever handle

## WARRANTY


- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations

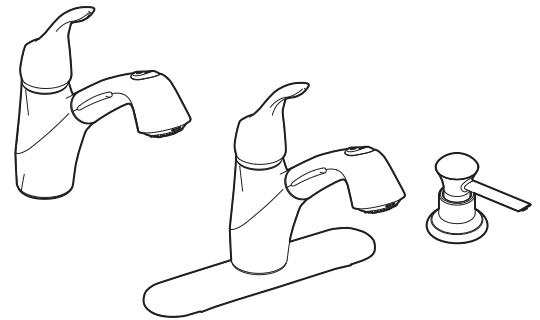

## Torrance™ Single Control Pull-Out Kitchen Faucet

Models: CA87666 series

**NOTE:** DESIGNED TO INSTALL THROUGH  
1 OR 3 HOLES 1-1/2" (38mm) DIA.

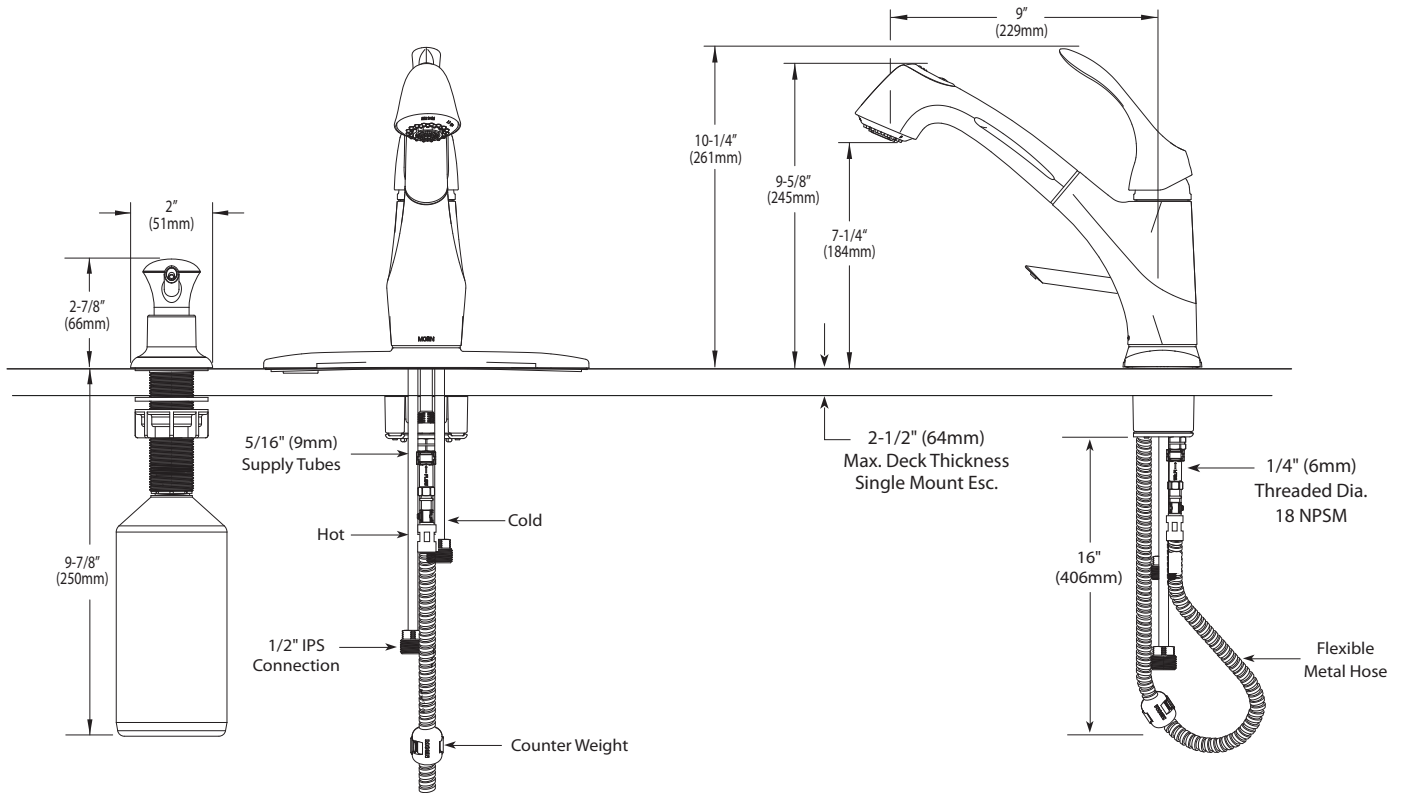

## CRITICAL DIMENSIONS

(DO NOT SCALE)