



Buy it for looks. Buy it for life.®

Specifications

FAUCET DESCRIPTION

- Metal construction with various finishes identified by suffix
- 1/2" IPS connections will accept standard ball nose connection for 3/8" tubing
- Includes Protégé side spray
- Hydrolock® quick connect installation

OPERATION

- Lever style handle
- Will operate with less than 5 lbs. of force

FLOW

- Aerator is limited to 2.2 gpm max (8.3 L/min)

CARTRIDGE

- 4000 ceramic disk cartridge design


STANDARDS

- Third party certified to CSA B-125.1, ASME A112.18.1, ICC A117.1 and all applicable requirements referenced therein
- Certified to ANSI/NSF 61/9
- Contains no more than 0.25% weighted average lead content
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act

- **ADA**  for lever handle

WARRANTY


- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations



QUINN™
Single Handle Kitchen Faucet

Models: CA87845 series

SPOUT, HANDLE, AND HOSE SPRAY INSTALL THROUGH DECK HOLES A MINIMUM OF 1-1/4" (32mm) IN DIAMETER

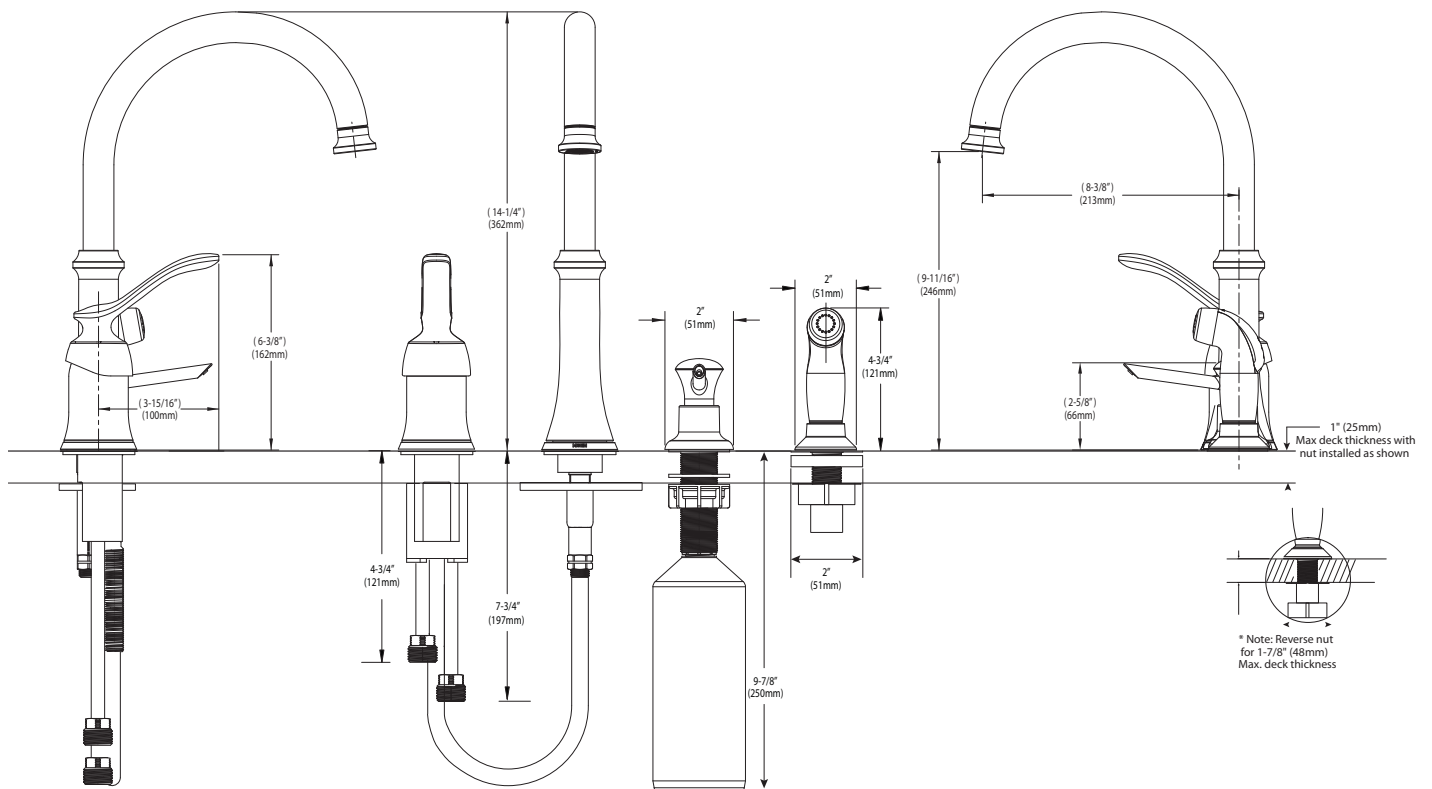

CRITICAL DIMENSIONS

(DO NOT SCALE)