



A line drawing of a kitchen faucet. It features a central curved spout and two side handles, one on each side. The faucet is mounted on a rectangular base. The drawing is simple, using black outlines on a white background.


- Metal construction with various finishes identified by suffix
- 1/2" IPS connections
- Includes Protégé side spray with Duralock™ quick-connect installation

- Lever style handles
- Maximum handle rotation angle is 90° to full on either handle
- Rotating hot side counterclockwise to open and clockwise to close
- Rotating cold side clockwise to open and counterclockwise to close
- Includes hot (red) and cold (blue) temperature indicators

- Aerator is limited to 2.0 qpm max (7.6 L/min)

- 1224 cartridge design
- Nonmetallic and stainless steel material


- Third party certified to CSA B-125.1, ASME A112.18.1, and all applicable requirements referenced therein
- Certified to ANSI/NSF 61/9 & 372
- Contains no more than 0.25% weighted average lead content
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act

- ADA  for lever handles
- Meets Georgia SB370 requirements

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations

Two Handle Lever Style Kitchen Faucet with Protégé Side Spray

NOTE: DESIGNED TO INSTALL THROUGH 4 HOLES 1-1/4" (32mm) MIN. DIA. AND 4" (102mm) ON CENTER.

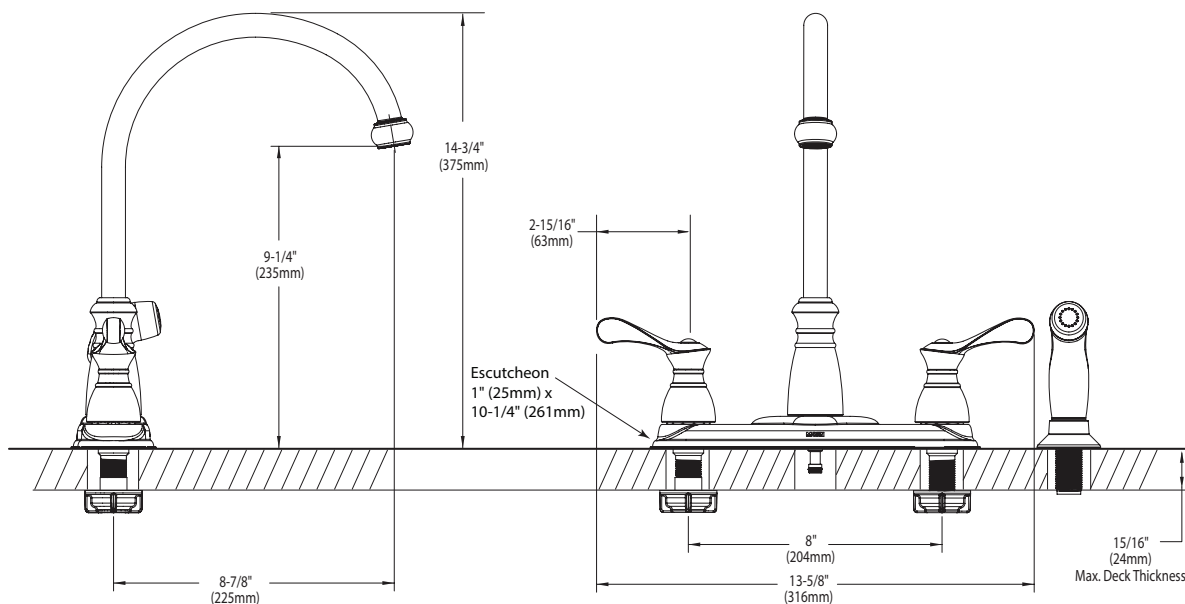

(DO NOT SCALE)