



Buy it for looks. Buy it for life.®

Specifications

DESCRIPTION

- Metal construction
- 1/2" copper connections
- Designed to be installed through 2, 1-1/4 holes & 1, 1" min. dia. holes, 8" on center
- Adaptable for non-8" centers

OPERATION

- Maximum handle rotation angle is 90° to full on for either handle
- Rotate hot side handle counterclockwise to open and clockwise to close
- Rotate cold side handle clockwise to open and counterclockwise to close

CARTRIDGE

- 1224 cartridge design with nonmetallic/nonferrous and stainless steel materials


STANDARDS

When trim kit is added to M-Pact valve, the product is:

- Third party certified to CSA B-125.1, ASME A112.18.1, and all applicable requirements referenced therein including NSF61/9
- Contains no more than 0.25% weighted average lead content
- Complies with California Proposition 65 and with Federal Safe Drinking Water Act



WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations



M-Pact™ Two-Handle Wall Mount Valve & Bracket

Model: CA9400

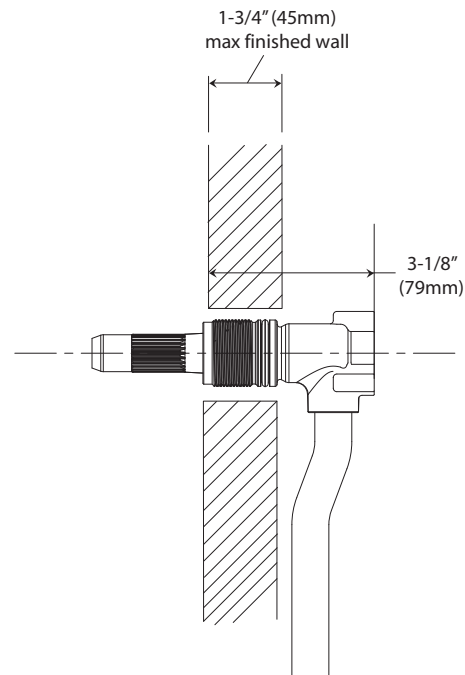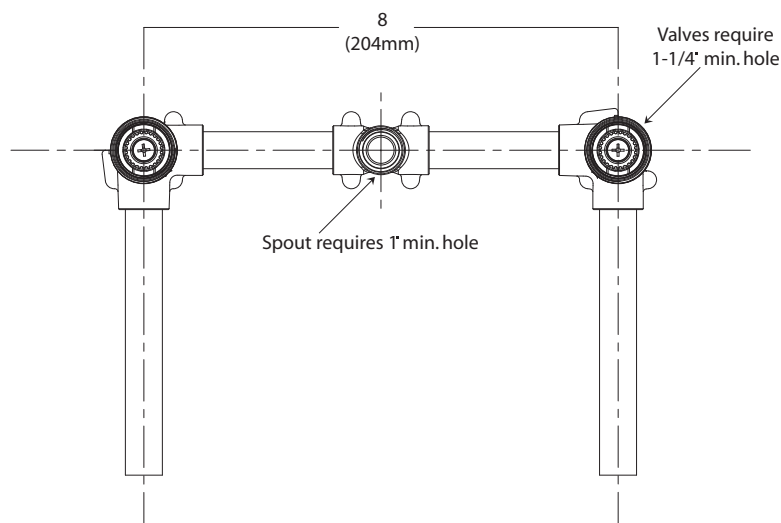

CRITICAL DIMENSIONS

(DO NOT SCALE)

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN

www.moen.com