

DESCRIPTION

- Metal construction with various finishes identified by suffix
- 1/2" IPS connections will accept standard ball nose connection for 3/8" tubing
- Includes optional hot and cold temperature indicators
- Includes matching finish side spray with Hydrolock® quick connect system
- Hydrolock® quick connect installation

OPERATION

- Lever style handles
- Rotate hot side handle counterclockwise to open and clockwise to close
- Rotate cold side handle clockwise to open and counterclockwise to close


FLOW

- Aerator is limited to 2.2 gpm max. (8.3 L/min)

CARTRIDGE


- 1224 cartridge design with nonmetallic/nonferrous and stainless steel materials

STANDARDS


- Third party certified to ASME A112.18.1/CSA B125.1 and all applicable requirements therein including NSF 61/9
- Contains no more than 0.25% weighted average lead content
- Complies with California Proposition 65 and with the Federal Water Drinking Act
- ADA  for lever handles

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations

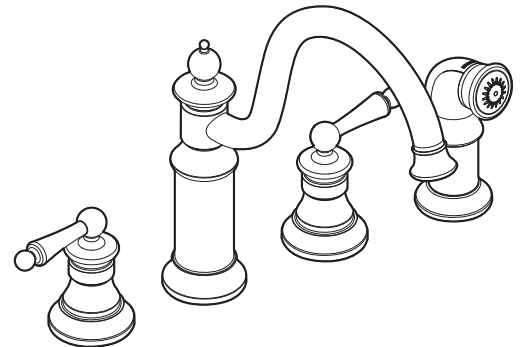

Waterhill™
Two-Handle Kitchen Faucet
Models: CAS712 series

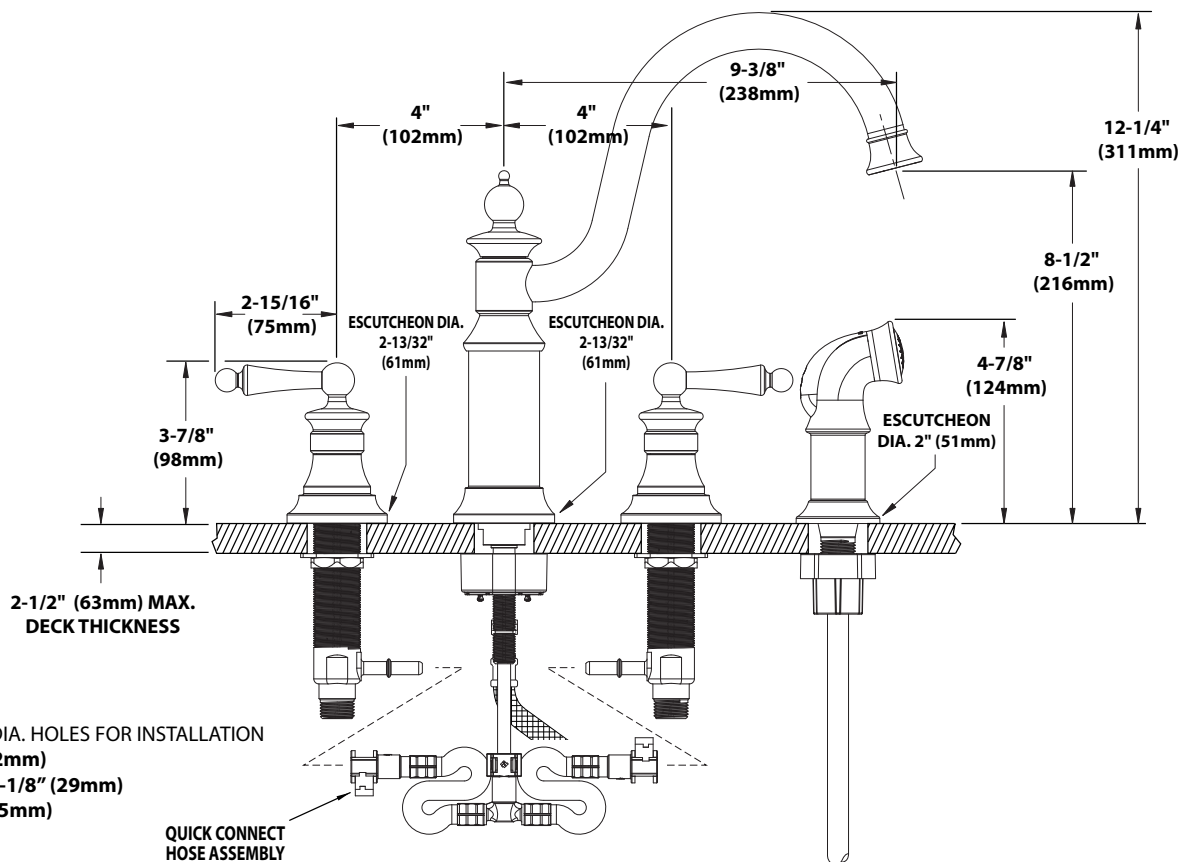

NOTE: MINIMUM DIA. HOLES FOR INSTALLATION

- Spout = 1-1/4" (32mm)
- Handle Valves = 1-1/8" (29mm)
- Side Spray = 1" (25mm)

QUICK CONNECT HOSE ASSEMBLY

CRITICAL DIMENSIONS

(DO NOT SCALE)