



Buy it for looks. Buy it for life.®

Specifications

DESCRIPTION

- Digital thermostatic valve design with integral checkstops and 1/2" push fit connections

OPERATION

- Temperature range adjustment from 60 degrees F to 120 degrees F (16 degrees C to 49 degrees C). Factory maximum setting is 115 degrees (46 degrees C)
- Must be used with controller TS3405 or TS3415 series
- Valve must be installed in an area that has an access panel

FLOW


- Designed to deliver 10 gpm at 60 psi unrestricted flow (38L/min)

STANDARDS



- Third party certified to meet ASME A112.18.1/CSA B-125.1 and all applicable requirements referenced therein including ASSE 1016
- Third party certified to meet UL1951
- Third party certified to meet FCC part 15

WARRANTY

- 5 year warranty against leaks, drips and operation defects to the original consumer purchaser
- 1 year warranty if used in commercial installations

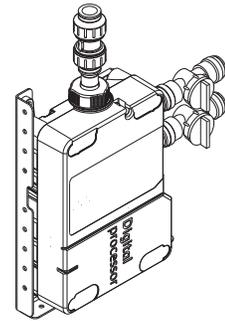

**ioDIGITAL™
Shower Valve
Model: S3381**

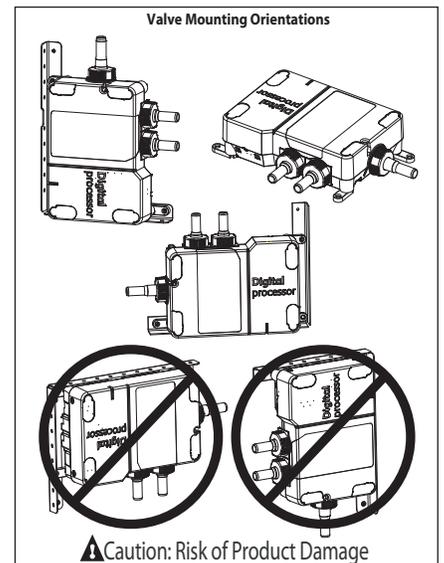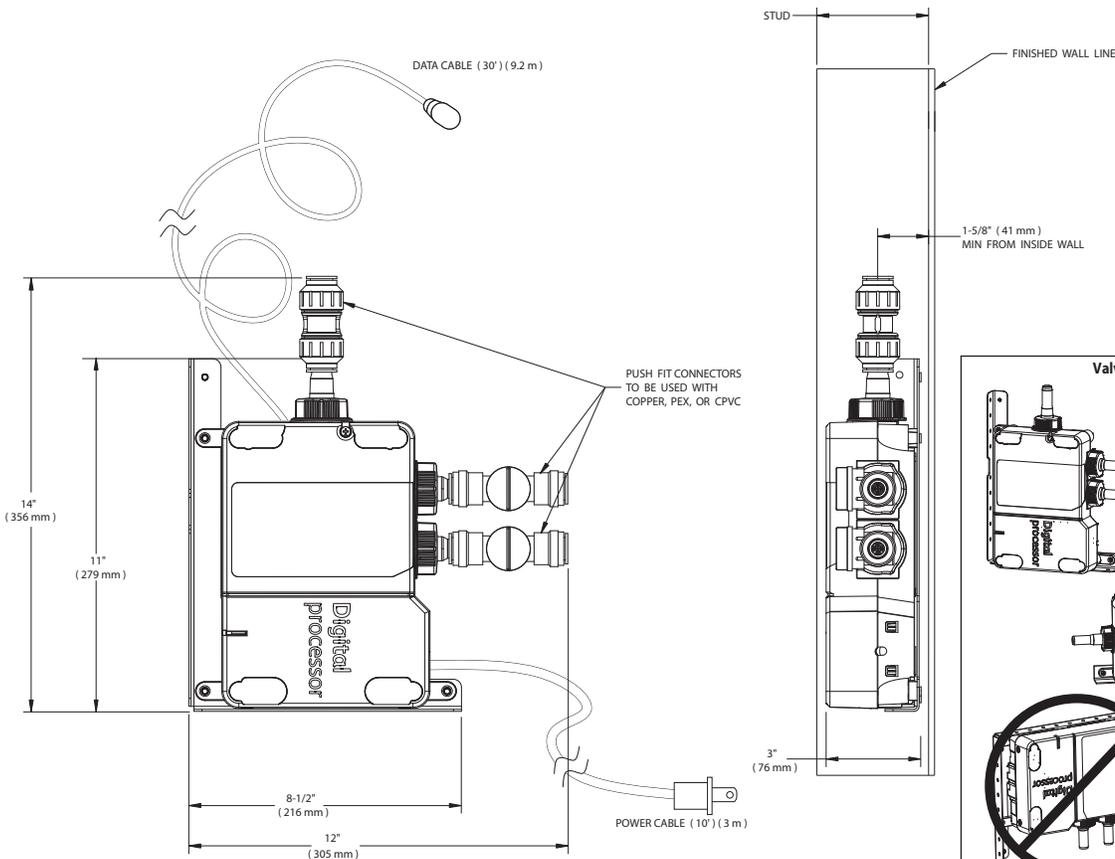

CRITICAL DIMENSIONS

(DO NOT SCALE)