

Shower Rods Technical Specification

Shower Rod Sets – Adjustable

52

Stock Numbers:

5" Aluminum Shower Rod Set

1" Diameter Rod

Zinc Alloy Adjustable Flanges (52-F)

White Foot Pads

- ☐ 52-5
Polished Chrome Finish
- ☐ 52-5-OWB
Old World Bronze Finish

5" Stainless Steel Shower Rod Set

1" Diameter Rod

Zinc Alloy Adjustable Flanges (52-F)

White Foot Pads

- ☐ 52-5-BN
Brushed Finish
- ☐ 52-5-SS
Stainless Finish

6" Aluminum Shower Rod Set

1" Diameter Rod

Zinc Alloy Adjustable Flanges (52-F)

White Foot Pads

- ☐ 52-6
Polished Chrome Finish

Materials:


AluminumChrome Shower Rods are 28-gauge aluminum with a triple plated polished chrome finish.

"SS" Shower Rods are 28-gauge stainless steel with a triple plated polished chrome finish.

Old World Bronze Shower Rods are 20-gauge aluminum with a powder coated finish.

Brushed Nickel Shower Rods are 23-gauge #430 brushed stainless steel.

Dimensions:

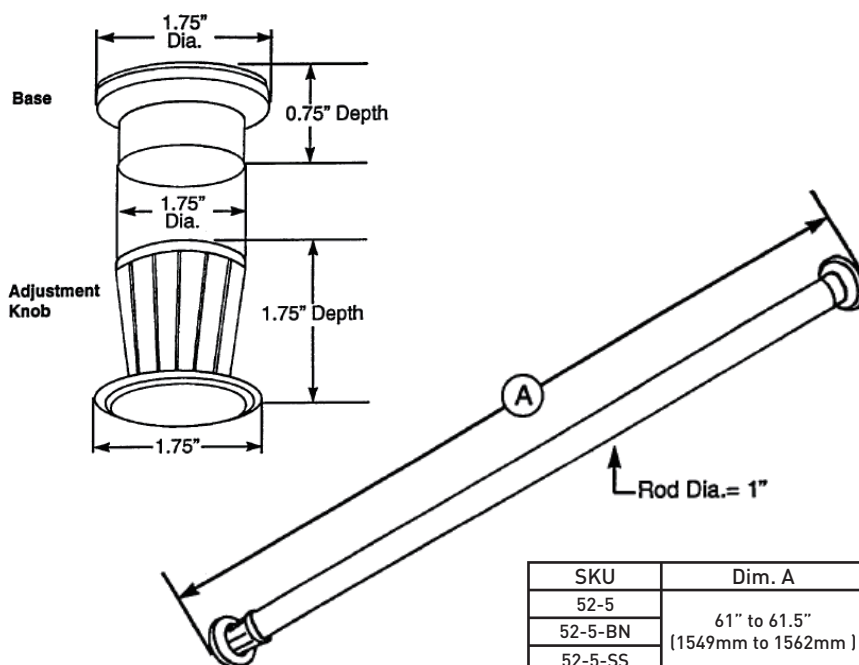

SKU	Dim. A
52-5	61" to 61.5" (1549mm to 1562mm)
52-5-BN	
52-5-SS	
52-5-OWB	
52-6	74" to 74.5" (1880mm to 1892mm)

Installation Instructions:

1. Place flanges on both ends of shower rod.
2. Position rod assembly in desired location.
3. Tighten assembly against wall by twisting adjustment knob counter clockwise.

Cleaning Instructions:

To preserve the fine finish of this product, clean only with a soft damp cloth. Use a dry cloth to wipe down the product and remove any excess moisture. Do not use commercial or abrasive cleaners.

MOEN®

25300 AL MOEN DRIVE • NORTH OLMSTED, OH 44070
CORPORATE HEADQUARTERS: (800) 321-8809 • FAX: (800) 848-6636
INTERNATIONAL: (440) 962-2000 • FAX: (440) 962-2726
CUSTOMER SERVICE (USA): 800-882-0116 • FAX: (888) 379-2720
WWW.MOEN.COM
©2025 Moen Incorporated.