

DESCRIPTION

- Brass construction with chrome plated finish
- 1/2" IPS connections
- 8" widespread
- 8" spout reach

OPERATION

- 4" wrist blade handles with hot and cold color indicators*
- *Smooth handle models have hot and cold color indicator at torx head screw
- 1/4 turn open (clockwise to close)
- Vandal resistant torx head screws


FLOW

- Water usage is limited to these maximum flow rates as indicated by the corresponding product markings

CARTRIDGE

- Brass shell, ceramic disc cartridge
- Nonmetallic/nonferrouse and ceramic material

STANDARDS


- Third party certified to ASME A112.18.1/CSA B125.1 and all applicable specifications referenced therein
- Certified to NSF 61/9 & 372
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- ADA  for lever handles

WARRANTY

- Warranted for 5 years against material or manufacturing defects



Smooth Handle

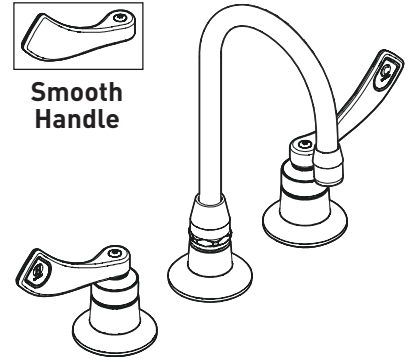


Two-Handle Kitchen Faucet with Spout

MODEL	FLOW (gpm/Lpm)	HANDLE STYLE
❖ 8225	1.5/5.7	Decal
❖ 8225SMF15	1.5/5.7	Smooth

- ❖ Includes optional 1.5 gpm (5.7 L/min) max. laminar flow spout base conversion kit



NOTE: Designed to be installed through 3 holes - 1-9/32" min. dia.

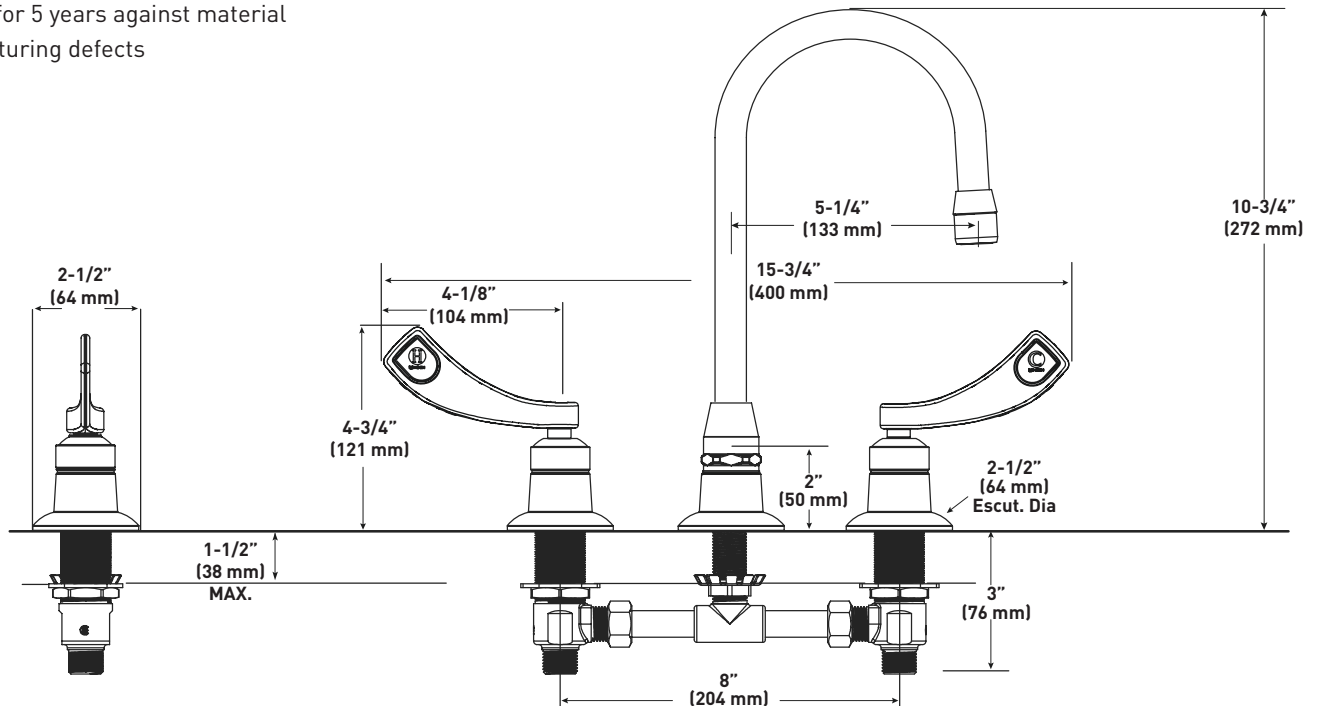

CRITICAL DIMENSIONS DO NOT SCALE