

## DESCRIPTION

- Brass construction with chrome plated finish
- 8" widespread
- 1/2" IPS connections
- 5-1/4" spout reach

## OPERATION

- 4" wrist blade handles with hot and cold color indicators\*
- \*Smooth handle models have hot and cold color indicator at torx head screw
- Vandal resistant torx head screws


## FLOW

- Water usage is limited to these maximum flow rates as indicated by the corresponding product markings

## CARTRIDGE

- Brass shell, ceramic disc cartridge
- 1/4 turn operation

## STANDARDS


- Third party certified to meet A112.18.1/CSA B125.1 and all applicable specifications referenced therein
- Certified to NSF 61/9 & 372
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- ADA  for lever handles
- Faucets rated at 1.2gpm (4.5 Lpm) are WaterSense Certified

## WARRANTY

- Warranted for 5 years against material or manufacturing defects



Smooth Handle

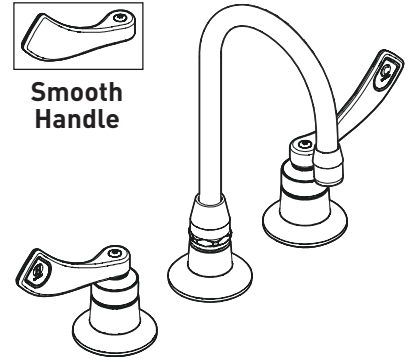


## Two-Handle Lavatory Faucet with Spout

MODEL	FLOW (gpm/Lpm)	HANDLE STYLE
❖ 8248	1.2/4.5	Decal
❖ 8248SMF12	1.2/4.5	Smooth

❖ Includes optional 1.2 gpm (4.5 L/min) max. laminar flow spout base conversion kit



**NOTE: Designed to be installed through 3 holes - 1-9/32" min. dia.**

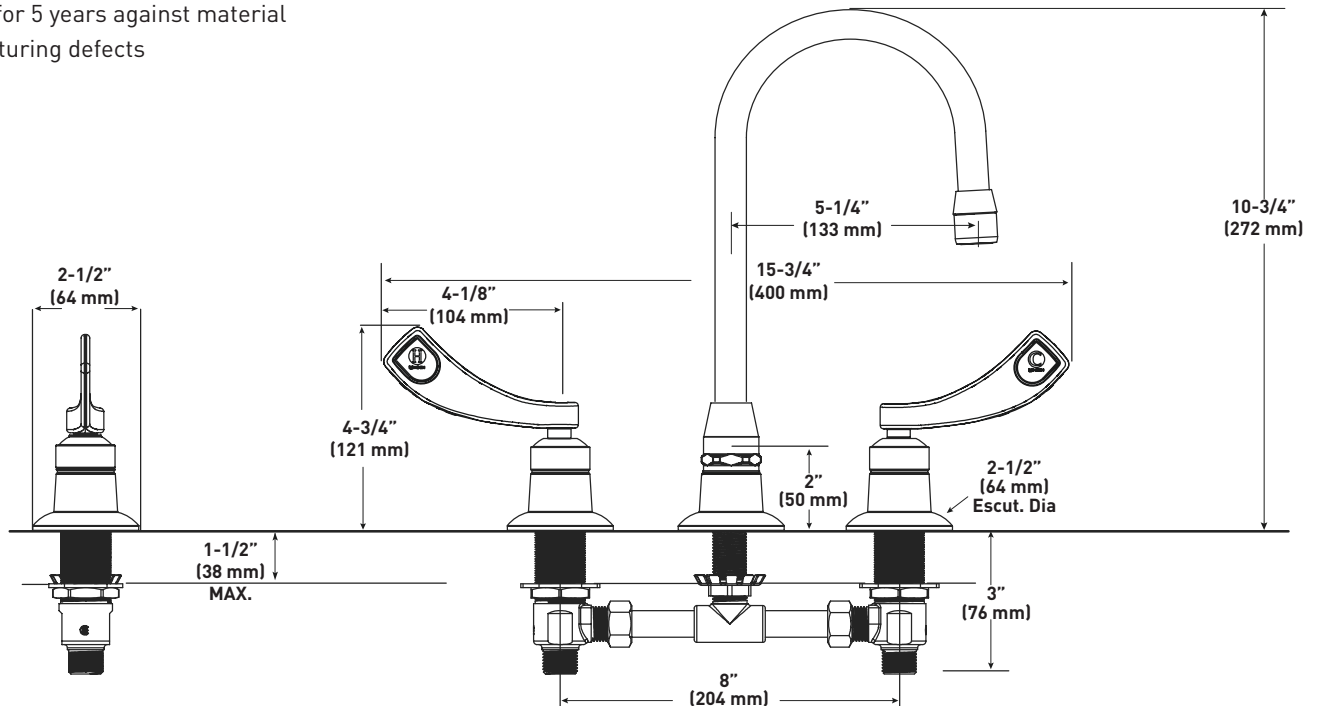

**CRITICAL DIMENSIONS** DO NOT SCALE