
MOEN®

SPECIFICATIONS

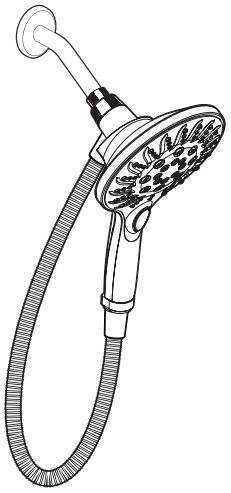

Engage™

Handshower
with Bracket & Hose

MODELS: 3662EP Series

DESCRIPTION
- Various finishes identified by suffix
- Handshower with Magnetix™ docking
- Metal shower ball
- 60" double interlock (metal) spiral hose
- Assembled with two check valves for backflow prevention
- Adjustable bracket

OPERATION
- Six function
- Wall bracket rotates to adjust angle of handshower

FLOW
- Designed to deliver 1.75 gpm (6.7 L/min) max. at 80 psi

STANDARDS
- Designed and manufactured to comply with the applicable requirements of WaterSense®, ASME A112.18.1/CSA B-125.1, ASSE 1014 and all applicable specifications referenced therein

WARRANTY
- Lifetime limited warranty against material or manufacturing defects to the original consumer purchaser
- 5 year warranty if used in commercial installations

WaterSense Meets EPA Criteria
Certified by IAPMO R&T

