

MOEN®

Specifications

There is more than one version of this model.

To identify your specific Sleek 7864 series model number, check the label attached to the faucet supply line underneath your sink. This version is 01.



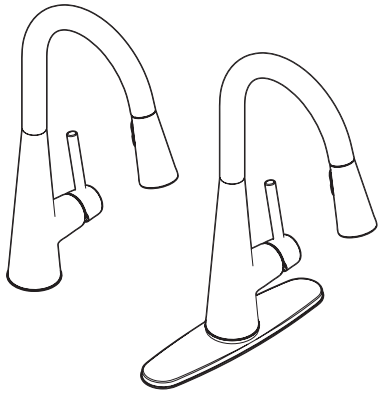

Sleek™
Single-Handle High Arc Pulldown Kitchen Faucet

Models: 7864 series

NOTE: THIS FAUCET IS DESIGNED TO BE INSTALLED THROUGH 1 OR 3 HOLES, 1-1/2" (38mm) MIN. DIA.

DESCRIPTION
- Reflex™ pulldown system offers smoother operation, easy movement and secure docking
- PowerBoost™ Spray Technology
- Duralock™ quick connect hose for easier installation
- Metal construction with various finishes identified by suffix
- Pulldown spray with 68" braided hose
- High arc spout provides height and reach to fill or clean large pots while pullout wand provides the maneuverability for cleaning or rinsing
- 360º rotating spout
- Flexible supply lines with 3/8" compression fittings

OPERATION
- Lever style handle
- Operates with less than 5 lbs. of force
- Operates in stream or spray mode in the pulldown or retracted position
- Temperature controlled by 100º arc of handle travel


FLOW
- 1.5 gpm (5.7 L/min) max at 60 psi
- PowerBoost™ increases flow rate with push of a button


CARTRIDGE
- 1255™ Duralast™ cartridge for Single-Handle Faucets
- Engineered polymers, non-ferrous and stainless steel materials

STANDARDS
- Third party certified to IAPMO Green, ASME A112.18.1/CSA B-125.1 and all applicable requirements referenced therein including NSF 61/9 & 372
- Meets CalGreen and Georgia SB370 requirements
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- ADA for lever handle
- The backflow protection system in this device consists of two independently operating check valves, a primary and a secondary which prevent backflow

WARRANTY
- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
- 10 year limited warranty when used in a multifamily installation
- 5 year limited warranty when used in a commercial installation

Visit www.moen.com/support for complete details and limitations

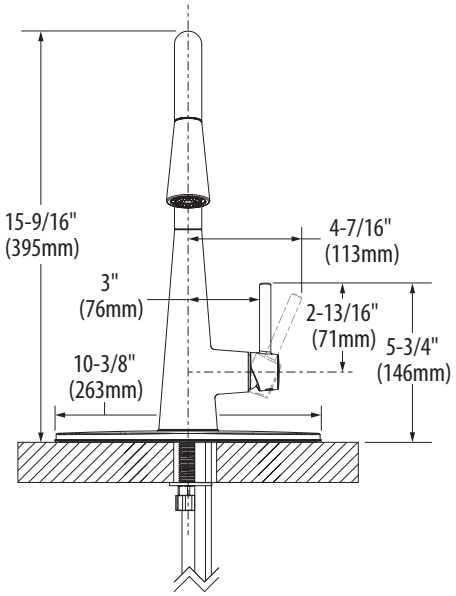

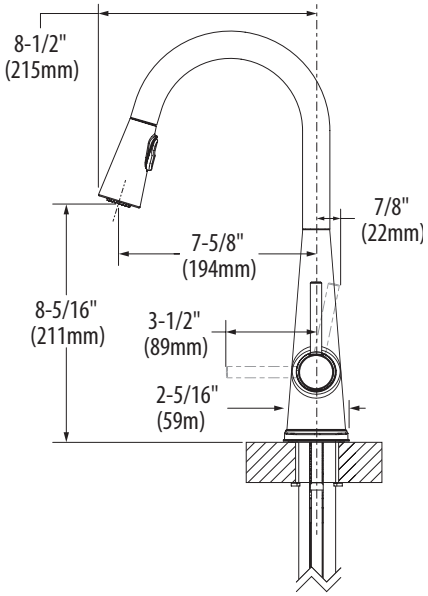



MOEN®

SPECIFICATIONS

There is more than one version of this model.

To identify your specific Sleek 7864 series model number, check the label attached to the faucet supply line underneath your sink. This version is 02.



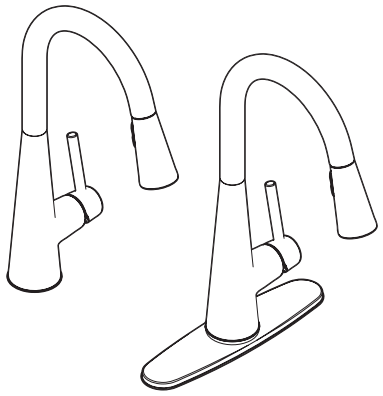

Sleek™
Single-Handle High Arc Pulldown Kitchen Faucet

MODELS: 7864 series

NOTE: This faucet is designed to be installed through 1 or 3 Holes,1-1/2" (38mm) Min. Dia.

GREEN UPC ®

DESCRIPTION
- Metal construction
- Comes in various finish options identified by suffix
- 1-hole or 3-holes installation (deckplate included)
- Includes
  - Flexible supply lines with 3/8" compression fittings
  - Duralock™ quick connect hose for easier installation
  - Power Clean™ spray technology for faster cleaning
  - PowerBoost™ technology for faster fill of pots and even more cleaning power
  - Reflex™ pulldown wand system with 68" braided hose for smooth operation, maneuverability, and secure wand docking
  - High-arc spout design provides additional room for cleaning and filling large pots.

OPERATION
- Operates in both stream or spray modes when wand is docked or pulled down
- Lever-style handle operates with less than 5lbs. of force
- Temperature controlled by 100° arc of handle travel

FLOW
- 1.5 gpm (5.7 L/min) max at 60 psi
- PowerBoost™ increases flow rate with push of a button

CARTRIDGE
- 1269 ceramic disc cartridge for single-handle faucets

STANDARDS
- Third party certified to IAPMO Green, ASME A112.18.1/CSA B 125.1 and all applicable requirements referenced therein including NSF 61/9 & 372
- Meets CalGreen and Georgia SB370 requirements
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- ADA for lever handle
- The backflow protection system in this device consists of two independently operating check valves, a primary and a secondary which prevent backflow

WARRANTY
- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
- 10 year limited warranty when used in a multifamily installation
- 5 year limited warranty when used in a commercial installation

Visit www.moen.com/support for complete details and limitations

