

## DESCRIPTION

- Fixed mount showerhead
- Finish identifiable by suffix
- 1/2" IPS connection
- Metal Shower Ball

## OPERATION

- Six functions
- Rotate outer ring to select function

## FLOW

- No suffix models are designed to deliver 2.5 gpm (6.6 L/min) MAX at 80 psi
- EP suffix models are designed to deliver 1.75 gpm (6.6 L/min) MAX at 80 psi
- EP15 suffix models are designed to deliver 1.5gpm (5.7 L/min) MAX at 80 psi


## STANDARDS

- Third party certified at WaterSense®, ASME A112.18.1/CSA B125.1 and all applicable requirements referenced therein
- No suffix models marked with 2.5gpm are compliant
- EP suffix models marked with 1.75gpm are compliant with California water efficiency regulations
- EP15 suffix models marked with 1.5gpm are compliant with California water efficiency regulations

## WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
- 10 year limited warranty when used in a multifamily installation
- 5 year limited warranty when used in a commercial installation

Visit [www.moen.com/support](http://www.moen.com/support) for complete details and limitations

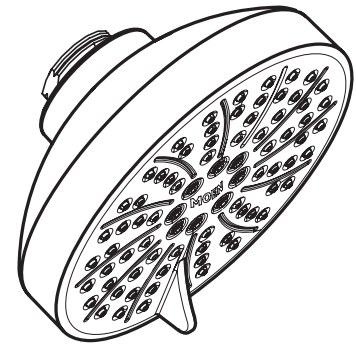

## 6-Function Eco-Performance Showerhead

**MODELS:** 6512 Series

### NOTE:

*WaterSense Compliant  
for EP and EP15 version*

