

MOEN®

SPECIFICATIONS

There is more than one version of this model.

To identify your specific Sleek 5925 series model number, check the label attached to the faucet supply line underneath your sink. This version is 01.



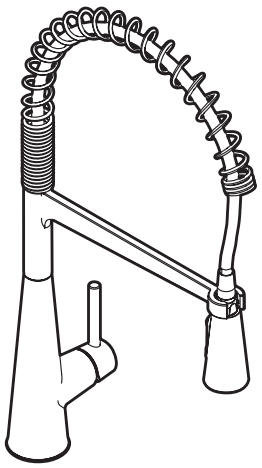

Sleek™
Single Handle Pre-Rinse Spring Pulldown Kitchen Faucet

Model: 5925 series

NOTE: this faucet is designed to be installed through 1 or 3 holes, 1-1/2" (38mm) min. dia.

GREEN UPC ®

FAUCET DESCRIPTION
- Pulldown system offers smooth operation, easy movement and secure docking
- Metal construction with various finishes identified by suffix
- Quick connect hose installation - Duralock™
- PowerBoost™ spray technology
- Pulldown spray with 68" braided hose
- Flexible supply lines with 3/8" compression fittings
- High arc spout provides height and reach to fill or clean large pots while pulldown wand provides the maneuverability for cleaning or rinsing
- Faucet designed for handle to be mounted on right side

OPERATION
- Lever style handle
- Temperature controlled by 100˚ arc of handle travel
- Operates with less than 5 lbs. of force
- Operates in stream or spray mode in the pullout or retracted position


FLOW
- 1.5 gpm (5.7 L/min) max at 60 psi
- PowerBoost™ increases flow rate with the push of a button.

CARTRIDGE
- 1255™ Duralast™ cartridge for single handle faucets

STANDARDS
- Third party certified to IAPMO Green, ASME A112.18.1/CSA B125.1 and all applicable requirements therein including NSF 61/9 & 372
- Meets CalGreen and Georgia SB370 requirements
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- The backflow protection system in the device consists of two independently operating check valves, a primary and a secondary which prevent backflow
- ADA for lever handle

WARRANTY
- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
- 10 year limited warranty when used in a multifamily installation
- 5 year limited warranty when used in a commercial installation

Visit www.moen.com/support for complete details and limitations

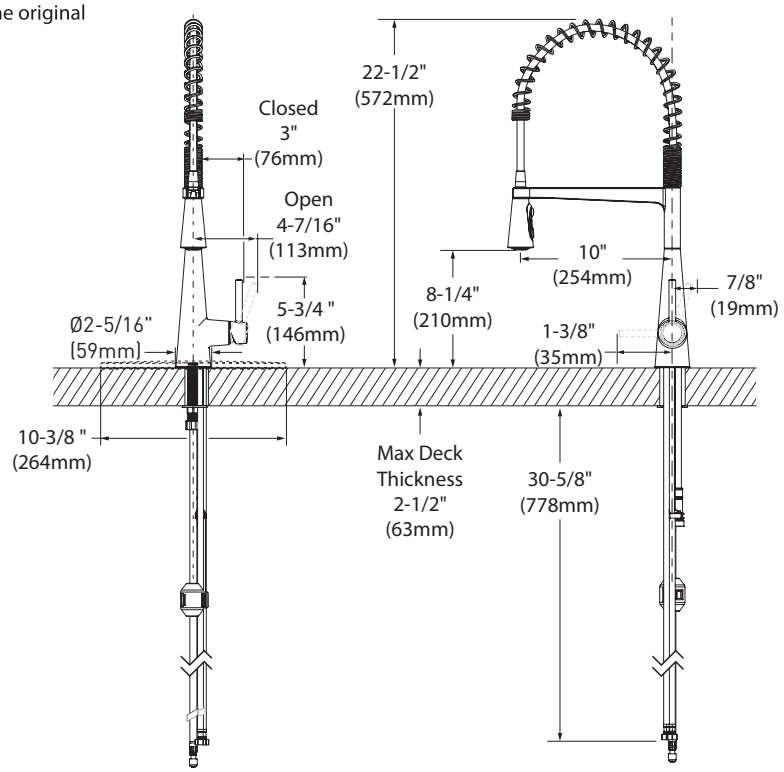


MOEN®

SPECIFICATIONS

There is more than one version of this model.

To identify your specific Sleek 5925 series model number, check the label attached to the faucet supply line underneath your sink. This version is 02.





Sleek™

Single Handle Pre-Rinse Spring Pulldown Kitchen Faucet

MODELS: 5925 series

NOTE: this faucet is designed to be installed through 1 or 3 holes, 1-1/2" (38mm) min. dia.

DESCRIPTION

- Metal construction
- Comes in various finishes identified by suffix
- 1-hole or 3-holes installation (deckplate included)
- Installs with handle on right side of faucet
- Includes
  - Duralock™ quick connect hose for easier installation
  - Power Clean™ spray technology for faster cleaning
  - PowerBoost™ technology for faster fill of pots and even more cleaning power
  - Reflex™ pulldown wand system with 68" braided hose for smooth operation, maneuverability, and secure wand docking
  - High-arc spout design provides additional room for cleaning and filling large pots.

OPERATION

- Operates in both stream or spray modes when wand is docked or pulled down
- Lever-style handle operates with less than 5lbs. of force
- Temperature controlled by 100° arc of handle travel

FLOW

- 1.5 gpm (5.7 L/min) max at 60 psi
- PowerBoost™ increases flow rate with push of a button

CARTRIDGE

- 1269 ceramic disc cartridge for single-handle faucets

STANDARDS

- Third party certified to IAPMO Green, ASME A112.18.1/CSA B125.1 and all applicable requirements therein including NSF 61/9 & 372
- Meets CalGreen and Georgia SB370 requirements
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- The backflow protection system in the device consists of two independently operating check valves, a primary and a secondary which prevent backflow
- ADA for lever handle

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
- 10 year limited warranty when used in a multifamily installation
- 5 year limited warranty when used in a commercial installation

Visit www.moen.com/support for complete details and limitations

GREEN UPC

