# MOEN®

## Specifications

#### DESCRIPTION

- Reflex<sup>™</sup> pulldown system offers smooth operation, easy movement and secure docking
- Metal construction with Spot Resist™ finish
- Duralock<sup>™</sup> guick connect installation
- Power Boost<sup>™</sup> Technology provides boosted water performance with the push of a button
- Pulldown spray with 68" braided hose
- Flexible supply lines with 3/8" CC fittings connect directly to supply stop • High arc spout provides height and reach to fill or clean large pots while
- pull out wand provides the maneuverability for cleaning or rinsing • 360° rotating spout

#### **OPERATION**

- Lever style handle
- Operates with less than 5 lbs. of force
- Operates in stream or spray mode in the pulldown or retracted position

#### FLOW

• Flow is limited to 1.5 gpm (5.7 L/min) at 60 psi

#### CARTRIDGE


- 1255<sup>™</sup> Duralast<sup>™</sup> cartridge for Single-Handle Faucets
- Engineered polymers, non-ferrous and stainless steel materials

#### **STANDARDS**

- Third party certified to IAPMO Green, ASME A112.18.1/CSA B-125.1 and all applicable requirements referenced therein including NSF 61/9 & 372
- Meets CalGreen and Georgia SB370 requirements
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- ADA 5 for lever handles
- The backflow protection system in this device consists of two independently operating check valves, a primary and a secondary which prevent backflow

#### WARRANTY

- Lifetime limited warranty against leaks, drips and
- finish defects to the original homeowner
- 10 year limited warranty when used in a multifamily installation
- 5 year limited warranty when used in a commercial installation
- Visit www.moen.com/support for complete details and limitations




### MIKAH™

Single-Handle High Arc Pull Down Kitchen Faucet

#### MODELS: 87069 series

#### NOTE: THIS FAUCET IS DESIGNED TO BE INSTALLED THROUGH 1 OR 3 HOLES, 1-1/2" (38mm) MIN. DIA.



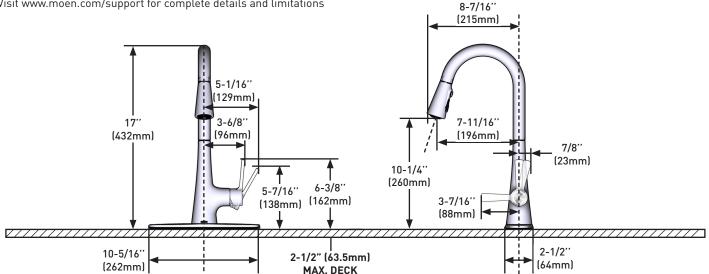

#### **CRITICAL DIMENSIONS** DO NOT SCALE